


COB600LED/m-DC24V-12MM-10/20M-No voaltage drop

SPECIFICATION

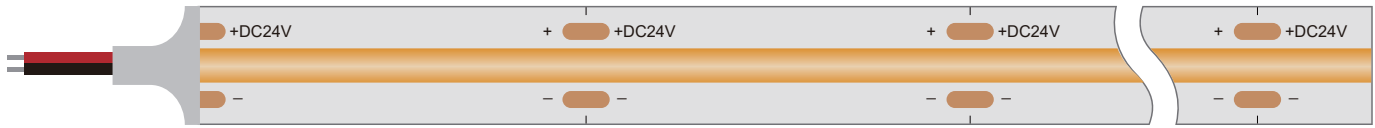

600_m
LED Qty

24_v
Voltage

12_{mm}
FPC width

24_{W/m}
Power

Product features:

- High-quality double-sided copper FPC board, flexible and resistant to bending, strong and durable
- Only one end of the power supply is required, and there is no pressure drop within 10 meters
- High-brightness energy-saving chips, the light efficiency per meter can reach 80~90Lm/W
- 120° illumination angle, high CRI, no spot, no flicker
- IP20 is not waterproof (can be processed to customize IP65\IP67\IP68 protection level)
- Precise production, quality assurance, 5-year warranty
- Support special customization and sample customization

*Application:*

Widely used in hotels, shoppingmalls, furniture, cabinets, shelf as decoration lighting, direct lighting or indirect lighting



Product parameters:

General parameters

Product Model	GL-R1000TF-600DxCOB COB 600leds/meter Double Row High Power 10/20M no Voltage Drop
Color	WW, NW, CW
CCT(K)	2700K/3000K/4000K/6000K
CRI	Ra≥90
Beam angle	120°
Cut Distance	20mm

Environmental test parameters


IP grade	IP20
Working environment	-25℃~+45℃
Storage environment	-30℃~+80℃
Max connection Length	10m

Performance parameters


Lumen(±5%)	2160~2400lm/m
Efficiency(±5%)	90~100lm/W
Voltage	DC24V
Electric current	1000mA/m
Power	24W/m

Packaging parameters





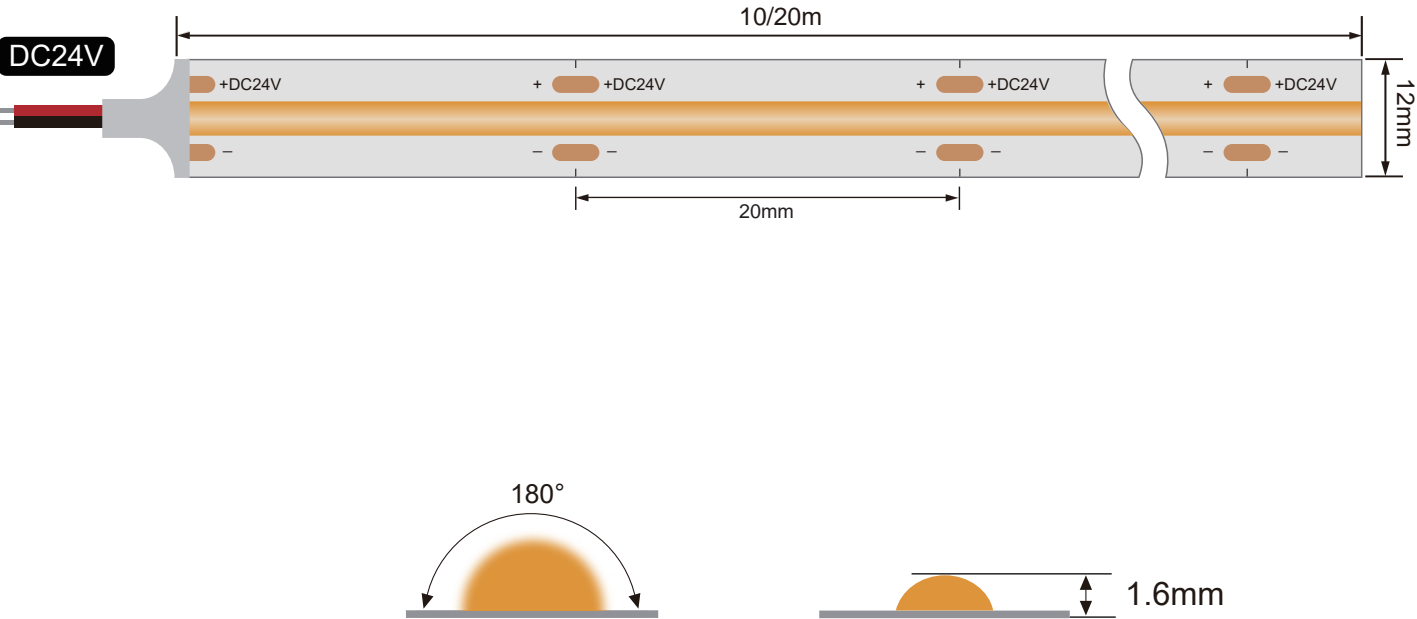




A roll	10m
N.W(Roll)	160g
Qty/Carton	500m/50roll
Packing size(mm)	L720*W280*H410
G.W	8Kg



Processing custom waterproof process:




Contrast of Process


IP RATING	STRUCTURE	FEATURE	REMARK
IP20		Non-Waterproof	Indoor Use Only
IP54		Nano Coated	Thin Film Coating Anti Splash Water Tiny Size Changed (Same Looking as IP20)
IP65		Silicone glue Coated Waterproof Suitable for Damp Location	Silicone Glue Coating Dropping Anti Splash Water Tiny Size Changed
IP67A		Silicone Extrusion Waterproof Suitable for Short-time Wet Location	Extruding Process Suitable for outdoor places without standing water
IP67B		Silicone Tube Waterproof Suitable for Damp Location	Silicone Empty inside Anti Spray Water Tiny Color Shift
IP67C		Silicone Extrusion Waterproof Suitable for Short-time Wet Location	Extruding Process Suitable for outdoor places without standing water
IP67D		U-Tube Instilled Silicone Glue Waterproof Suitable for Short-time Wet Location	Silicone Glue Coating Suitable for outdoor places without standing water
IP68A		Silicone Tube Injected Silicone Glue Waterproof Suitable for Outdoor and Underwater	360° Silicone Filling Use for Outdoor and Underwater
IP68B		Silicone Solid Extrusion Waterproof Suitable for Outdoor and Underwater	360° Silicone Filling Use for Outdoor and Underwater

IP code : Ingress Protection Marking, IEC standard 60529

Package:

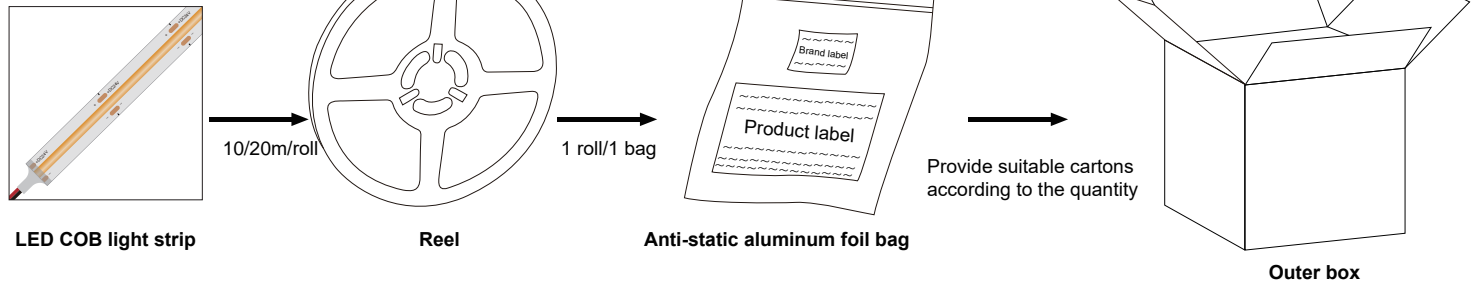

Installation diagram:

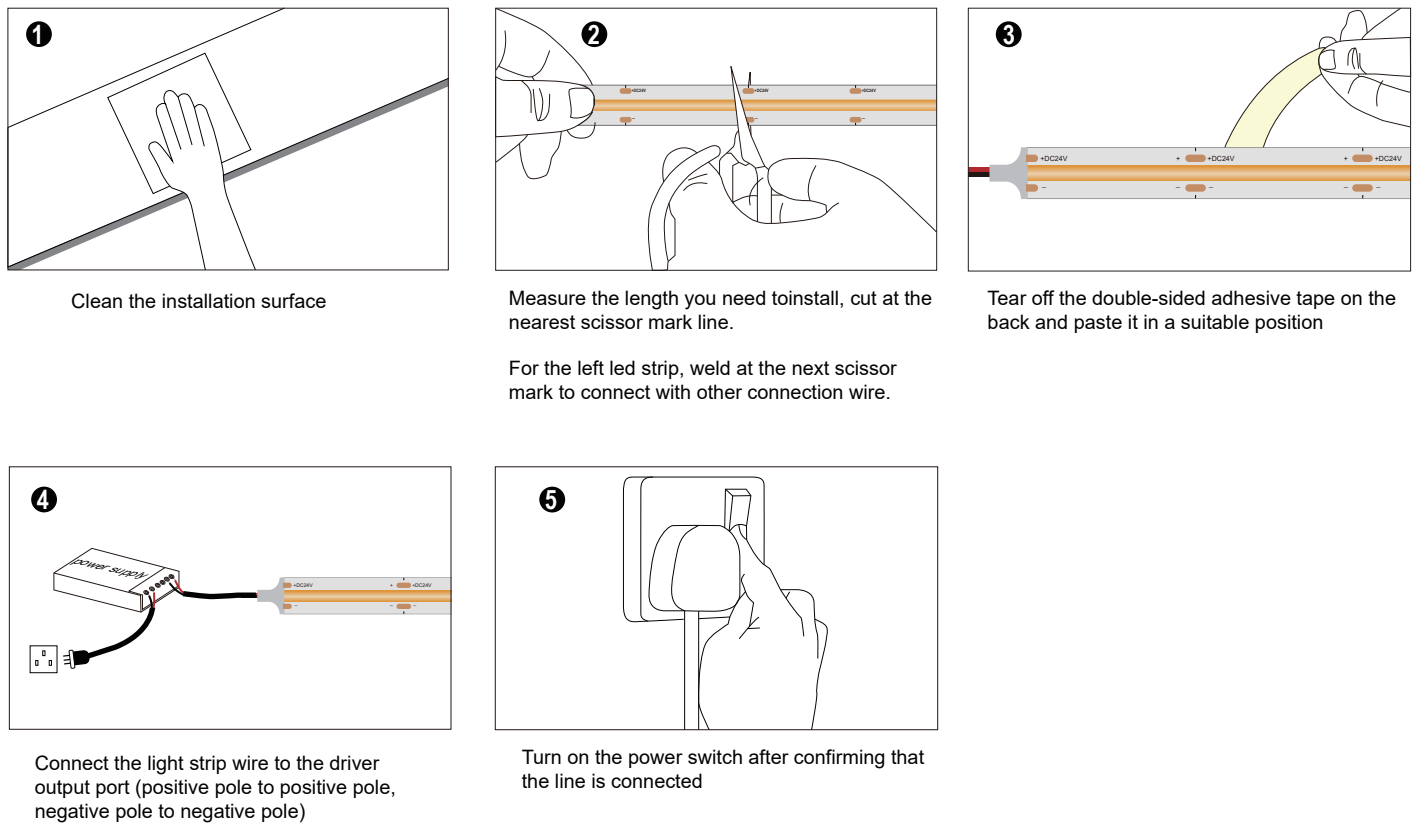

Statements :

- 1). For safety, the product wire should be moved and replaced by the manufacturer, agent or other authorized person.
- 2). Please refer to the product manual before installation.
- 3). Above-refered schematic diagrams are from our standard product. Please subject to your actual product data if there is difference.
- 4). In actual use, we suggest 80% consumption of the driver. Keep 20% as power to start the led strip.
- 5). For safety, no touch the AC terminal.
- 6). Any acidic or alkaline substance is forbidden.
- 7). No notice for updated of this product.

Problem	Possible reasons	solution
All fail	<ul style="list-style-type: none"> No power supply 	Give power supply.
	<ul style="list-style-type: none"> Automatic switch-off because of the open circuit and short circuit 	Solve the problem, switch on again.
	<ul style="list-style-type: none"> Wrong connection (positive connect with negative) 	Check and get right connection.
Part fail	<ul style="list-style-type: none"> Part power-supply fail 	Check and make sure the power supply well.
	<ul style="list-style-type: none"> Part circuit error 	
	<ul style="list-style-type: none"> Part wrong connection(positive connect negative) 	Check and get right connection.
Inconsistent brightness or insuffiscent brightness	<ul style="list-style-type: none"> overload of the driver 	Use higher-power driver.
	<ul style="list-style-type: none"> Too big power consumption of the switch, or unbalanced power consumption from different strip series. 	Keep the strip working voltage is more or less 5% than the Rated voltage. 1.shorten the connection cable length, or change to thicker cable. 2.Make sure the strip quantity is less than the allowed connection quantity.Keep the led strip quantity of each series similar).
	<ul style="list-style-type: none"> Too many Led strips connection 	Adjust the led strip quantity, make sure sufficient power supply.
LED flash	<ul style="list-style-type: none"> Poor welding connection of wires 	Check,find and solve it.
	<ul style="list-style-type: none"> switch problem 	Change to right switch.