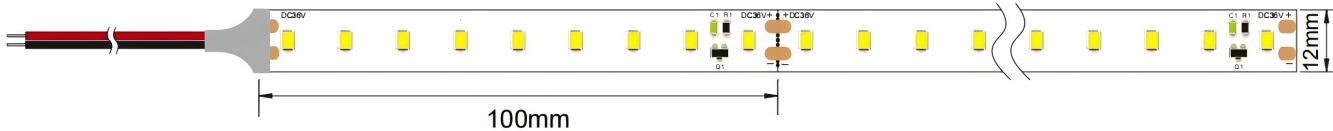


SMD2835-30M/roll-90LEDs-DC36V-12MM**SPECIFICATION**

90.
LED Qty

36.
Voltage

12.
FPC width

7.2.
Power

Product features:

- Continuous long-distance lighting with no dark spots.
- High luminous efficiency and excellent energy saving.
- Stable voltage design ensures uniform color output.
- Supports long wiring runs for flexible installation.
- Premium LED chips provide extended lifespan.
- Excellent heat dissipation for stable performance.
- Easy maintenance, ideal for large-scale projects.

**Application:**

Widely used in hotels, shopping malls, furniture, cabinets, shelves as decoration lighting, direct lighting or indirect lighting



Product parameters:

General parameters

Product Model	GL-R1000TFCC-90x28 Constant Current 90led/M
Color	WW,NW,CW
CCT(K)	3000K~6000K
CRI	Ra > 90
Beam angle	120°
Cut Distance	100mm

Environmental test parameters

IP grade	IP20
Working environment	-25°C ~ +45°C
Storage environment	-30°C ~ +80°C
Max connection Length	30m


Performance parameters

Lumen(±5%)	576-648lm/m
Efficiency(±5%)	80-90lm/W
Voltage	DC36V
Electric current	200mA/m
Power	7.2W/m

Packaging parameters


A roll	30m
N.W(Roll)	420g
Qty/Carton	750m-25roll
Packing size(mm)	L570*W240*H280
G.W	15.75Kg

Wiring Diagram:

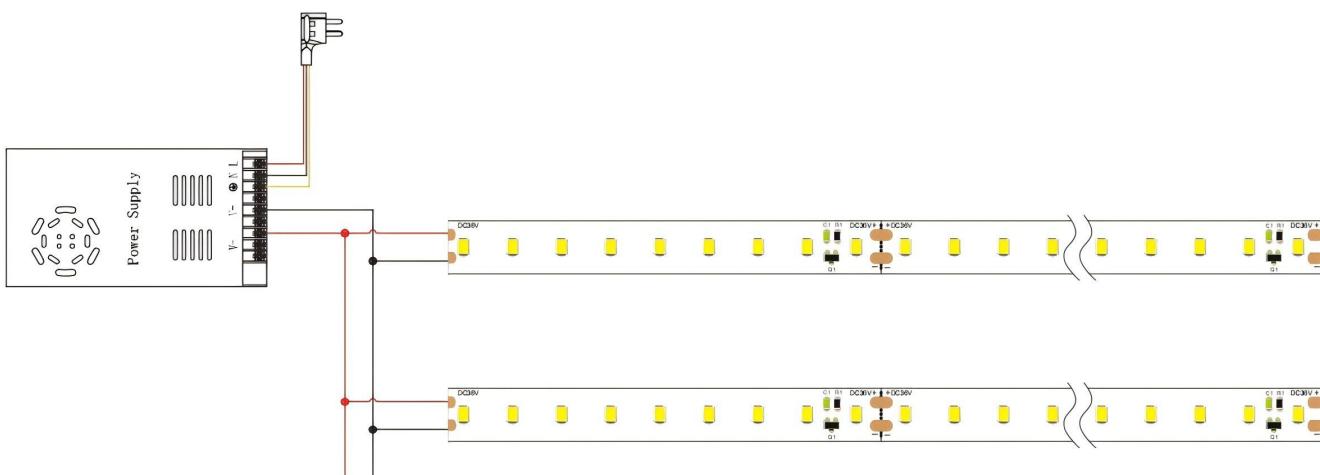


Processing custom waterproof process:

Contrast of Process


IP RATING	STRUCTURE	FEATURE	REMARK
IP20		Non-Waterproof	Indoor Use Only
IP54		Nano Coated	Thin Film Coating Anti Splash Water Tiny Size Changed (Same Looking as IP20)
IP65		Silicone glue Coated Waterproof Suitable for Damp location	Silicone Glue Coating Dripping Anti Splash Water Tiny Size Changed
IP67A		Silicone Extrusion Waterproof Suitable for Short-time Wet Location	Extruding Process Suitable for outdoor places without standing water
IP67B		Silicone Tube Waterproof Suitable for Damp Location	Silicone Empty inside Anti Spray Water Tiny Color Shift
IP67C		Silicone Extrusion Waterproof Suitable for Short-time Wet Location	Extruding Process Suitable for outdoor places without standing water
IP67D		U-Tube Instilled Silicone Glue Waterproof Suitable for Short-time Wet Location	Silicone Glue Coating Suitable for outdoor places without standing water
IP68A		Silicone Tube Injected Silicone Glue Waterproof Suitable for Outdoor and Underwater	360° Silicone Filling Use for Outdoor and Underwater
IP68B		Silicone Solid Extrusion Waterproof Suitable for Outdoor and Underwater	360° Silicone Filling Use for Outdoor and Underwater

IP code : Ingress Protection Marking, IEC standard 60529


Package:

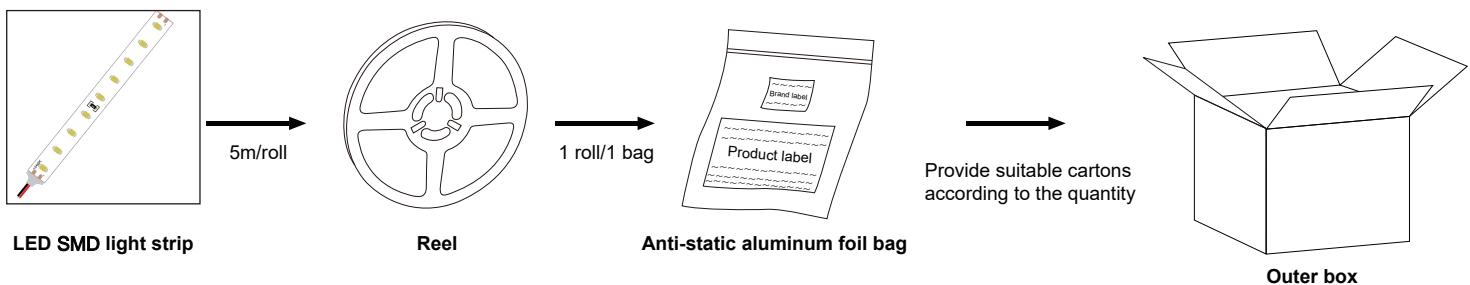


Installation diagram:

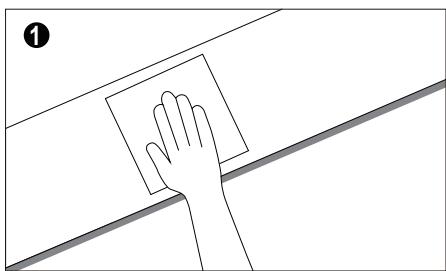


Clean the installation surface

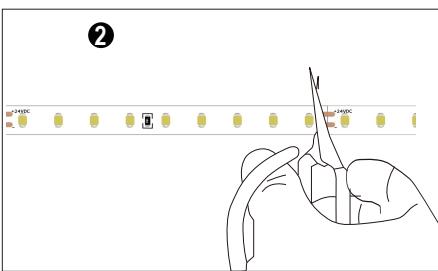


Measure the length you need to install, cut at the nearest scissor mark line.

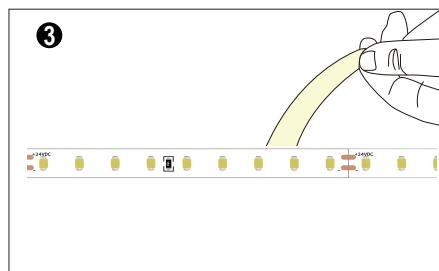

Tear off the double-sided adhesive tape on the back and paste it in a suitable position

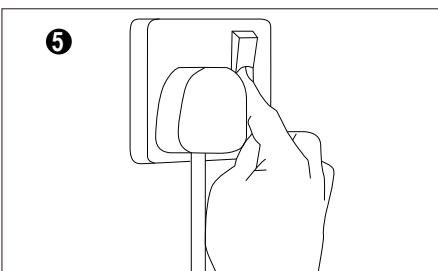

Connect the light strip wire to the driver output port (positive pole to positive pole, negative pole to negative pole)

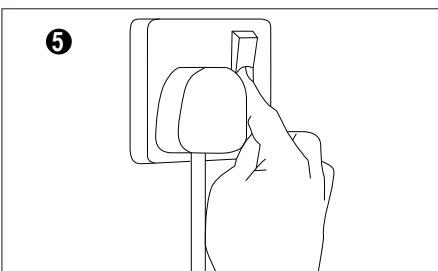

Turn on the power switch after confirming that the line is connected

Statements :

- 1). For safety, the product wire should be moved and replaced by the manufacturer, agent or other authorized person.
- 2). Please refer to the product manual before installation.
- 3). Above-refered schematic diagrams are from our standard product. Please subject to your actual product data if there is difference.
- 4). In actual use, we suggest 80% consumption of the driver. Keep 20% as power to start the led strip.
- 5). For safety, no touch the AC terminal.
- 6). Any acidic or alkaline substance is forbidden.
- 7). No notice for updated of this product.



Problem	Possible reasons	solution
All fail	● No power supply	Give power supply.
	● Automatic switch-off because of the open circuit and short circuit	Solve the problem, switch on again.
	● Wrong connection (positive connect with negative)	Check and get right connection.
Part fail	● Part power-supply fail	Check and make sure the power supply well.
	● Part circuit error	
	● Part wrong connection(positive connect negative)	Check and get right connection.
Inconsistent brightness or insufficient brightness	● overload of the driver	Use higher-power driver.
	● Too big power consumption of the switch, or unbalanced power consumption from different strip series.	Keep the strip working voltage is more or less 5% than the Rated voltage. 1.shorten the connection cable length, or change to thicker cable. 2.Make sure the strip quantity is less than the allowed connection quantity.Keep the led strip quantity of each series similar).
	● Too many Led strips connection	Adjust the led strip quantity, make sure sufficient power supply.
LED flash	● Poor welding connection of wires	Check,find and solve it.
	● switch problem	Change to right switch.