

Shenzhen GRILIGHT Technology Co.,Ltd

Tel: +8675527390189 Fax: +8675527397337

Web: www.grillite.com Contact: sale@grillight.com

PRODUCT SPECIFICATION

SILICONE NEON STRIP


D O M E N E O N

•

Top View



OD16



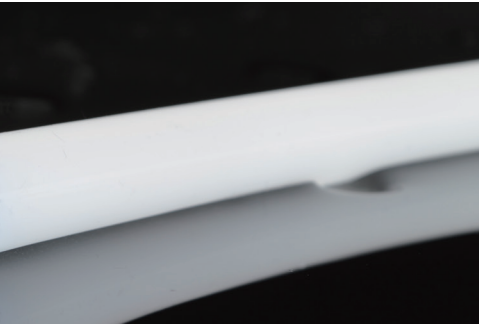


- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength.
- Environmental protection grade silicone material, integrated extrusion molding process.
- Unique optical light distribution structure design, uniform lighting surface and no shadow.
- IP67 protection level, salt solution resistance, acids & alkalis and UV resistance.
- Excellent toughness, simple and stylish appearance, delicate and unique.
- 3-year warranty for pixel models, 5-year warranty for others, long-life LED ≥50000 hrs.

Dimension structure (Unit: mm)

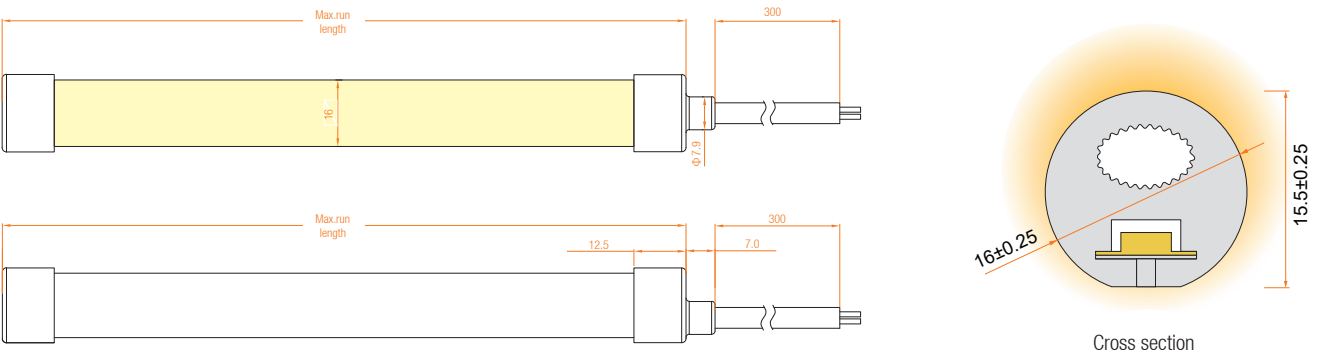

Min bending diameter



Bend vertical only

Electrical Parameter

Voltage	LED PIN Temperature	Storage Temperature	Ambient Temperature
DC24V	Max. 65 C	-25 C ~ 60 C	Min.-25°C Max(Table below)

Specification


Power (w/m)	Efficacy (lm/w) @4000K	Max Ambient Temperature
10	70	45°C

Due to the tolerance of the production and electrical components, output value and electrical power can very up to 10%


Length Standard

Length Range (M)	Final Length (mm)		Tolerance (mm)
	Silicone end cap		
0<Neon Strip(L)≤5	L+4.5		±7
5<Neon Strip(L)≤10	L+4.5		±10
10<Neon Strip(L)≤15	L+4.5		±13
15<Neon Strip(L)≤20	L+4.5		±16

Light Distribution Curve

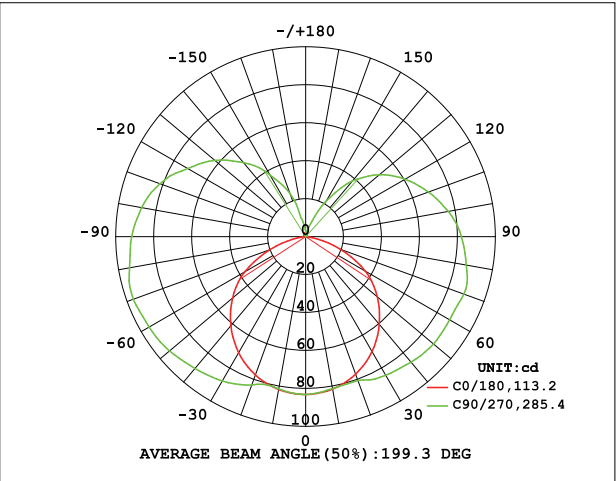

Illuminance curve

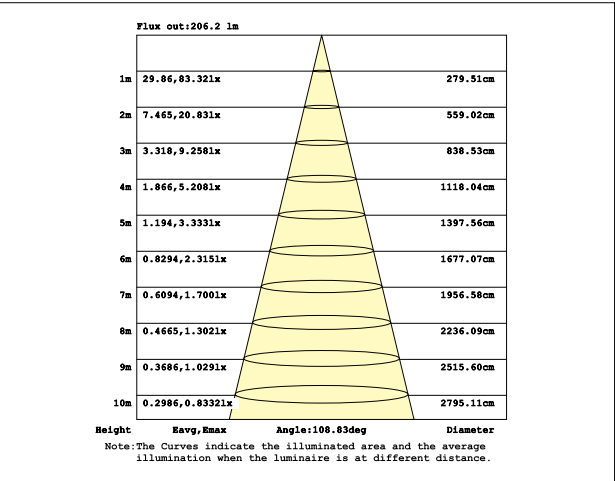

Note: The above data is based on 24V, 10W/M, single colour with 4000k colour temperature. If you need IES files for other types. Please contact our sales department.

Parameter Table

Horizontal Bending

Vertical Bending

Consistency One Bin

Resistant Saltwater

Resistant To Solvents

UV Protection

Warranty 3-5 Years

IK 10

IP 67

- The maximum series length refers to the maximum length of the light strip with single-end power supply in series under the standard 30CM cable.
- The given color temperature is the temperature of finished product.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- All products can be dimmed; the dimmer's voltage should conform to the rated voltage of the led light.
- The output frequency of the dimmer of the constant-current led light should be less than 2K Hz, and the output PWM can control the led light.

Single color

CCT(K)	RA	Voltage	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max.Run Length (M)	CC/CV
2100±150	≥90	DC24V	10	560	56	50	13(CC)	CC
2400±150	≥90	DC24V	10	590	59	50	13(CC)	CC
2700±150	≥90	DC24V	10	660	66	50	13(CC)	CC
3000±150	≥90	DC24V	10	650	65	50	13(CC)	CC
3500±200	≥90	DC24V	10	630	63	50	13(CC)	CC
4000 ⁺⁴⁰⁰ ₋₂₀₀	≥90	DC24V	10	700	70	50	13(CC)	CC
5000 ⁺⁵⁰⁰ ₋₃₀₀	≥90	DC24V	10	730	73	50	13(CC)	CC
6500±500	≥90	DC24V	10	730	73	50	13(CC)	CC
Red	--	DC24V	10	310	31	50	17(CC)	CC
Green	--	DC24V	10	780	78	50	13(CC)	CC
Blue	--	DC24V	10	160	16	50	13(CC)	CC
Yellow	--	DC24V	10	240	24	50	17(CC)	CC
Pink	--	DC24V	10	330	33	50	13(CC)	CC

CCT Tunable

CCT(K)	RA	Voltage	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max.Run Length (M)	CC/CV
2700±150	≥90	DC24V	5	365	73	50	5	CV
6500±500	≥90	DC24V	5	375	75	50	5	CV
2700+6500	≥90	DC24V	10	730	73	50	5	CV

RGB



CCT(K)	RA	Voltage	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max.Run Length (M)	CC/CV
R	--	DC24V	3.3	75	23	50	5	CV
G	--	DC24V	3.3	231	70	50	5	CV
B	--	DC24V	3.3	46	14	50	5	CV
RGB	--	DC24V	10	350	35	50	5	CV

Pixel RGB : SPI



CCT(K)	Voltage	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit length (mm)	Max.Run Length (M)	Pixel (PCS)	IC Model
R	DC24V	4.8	69	14.4	100	5	10	WS2811
G	DC24V	4.8	219	45.6	100	5	10	WS2811
B	DC24V	4.8	41	8.5	100	5	10	WS2811
RGB	DC24V	12.5	294	23.5	100	5	10	WS2811

Cable Lead Option (Unit: mm)

Silicone end cap (IP67)



Front Cable Entry




Closed End cap

Cable

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
PVC Cable		OD: 5.0mm / Inner core: 20AWG		Red V+, Black V-
		OD: 5.0mm / Inner core: 20AWG		Brown V+, White W-, Yellow WW
		OD: 5.5mm / Inner core: 20AWG		Black V+, Blue B-, Green G-, Red R
Waterproof		OD: 5.0mm / Inner core: 20AWG M12Male / Female connecto		Red V+, Black V-
Connector with		OD: 5.0mm / Inner core: 20AWG M12Male / Female connecto		Brown V+, White W-, Yellow WW
PVC Cable		OD: 5.0mm / Inner core: 20AWG M12Male / Female connecto		SPI: Red V+, Green DI/DO, Black V-
		OD: 5.5mm / Inner core: 20AWG M12Male / Female connecto		Black V+, Blue B-, Green G-, Red R


Cutting Mark



Remark:
The bottom of the led strip has transparent window, the black marker is the cutting position




Use professional scissors to cut vertically at the cutting mark



Please don't be feel free to cut and cut into an oblique angle or cambered section.

Accessories (Unit: mm)


PC Clip



Dimension:
20x16.6x15.3
Accessories:
Screw M3x16 (SUS304)




PC Profile




Dimension:
1000x16.6x15.3
Accessories:
Screw M3x16 (SUS304)


Single Color Connection Diagram

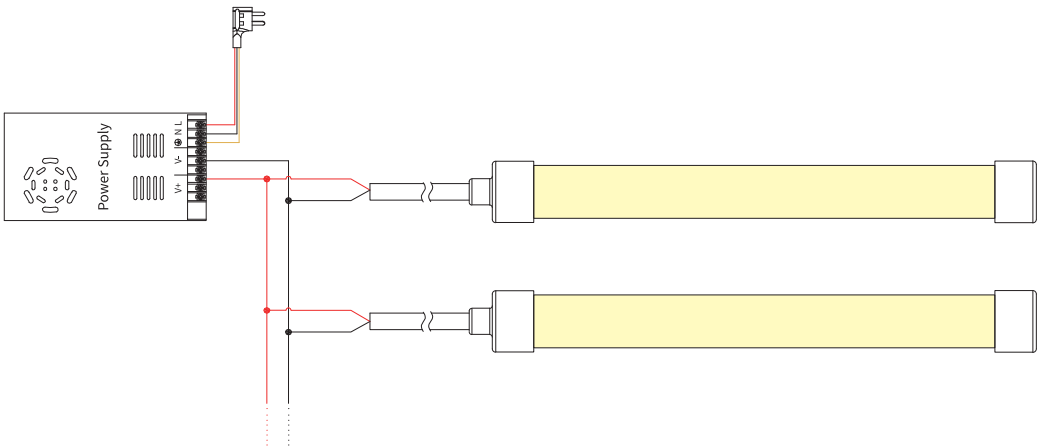


Tunable white Connection Diagram

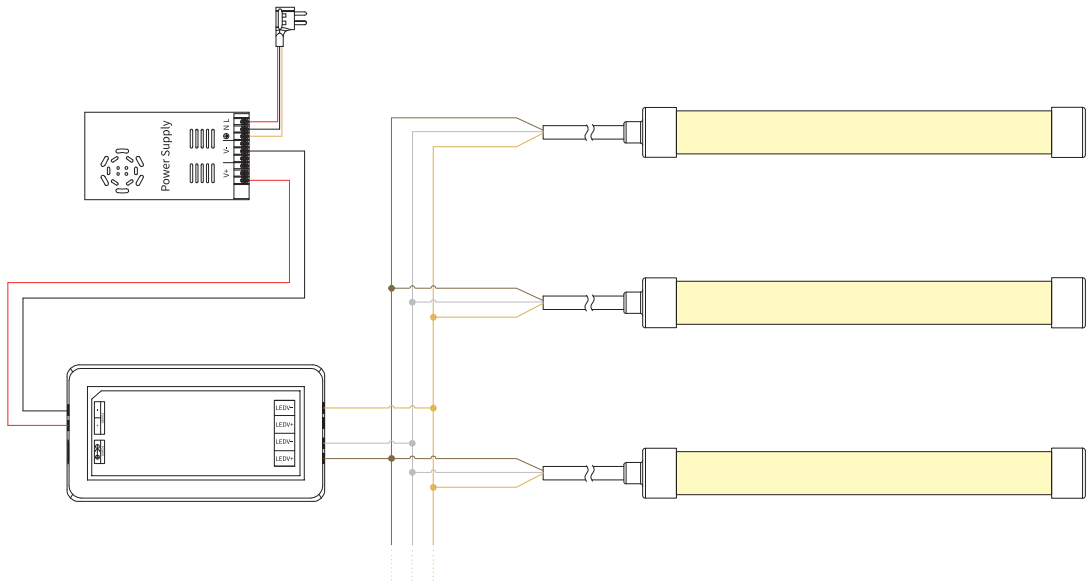


RGB Connection Diagram

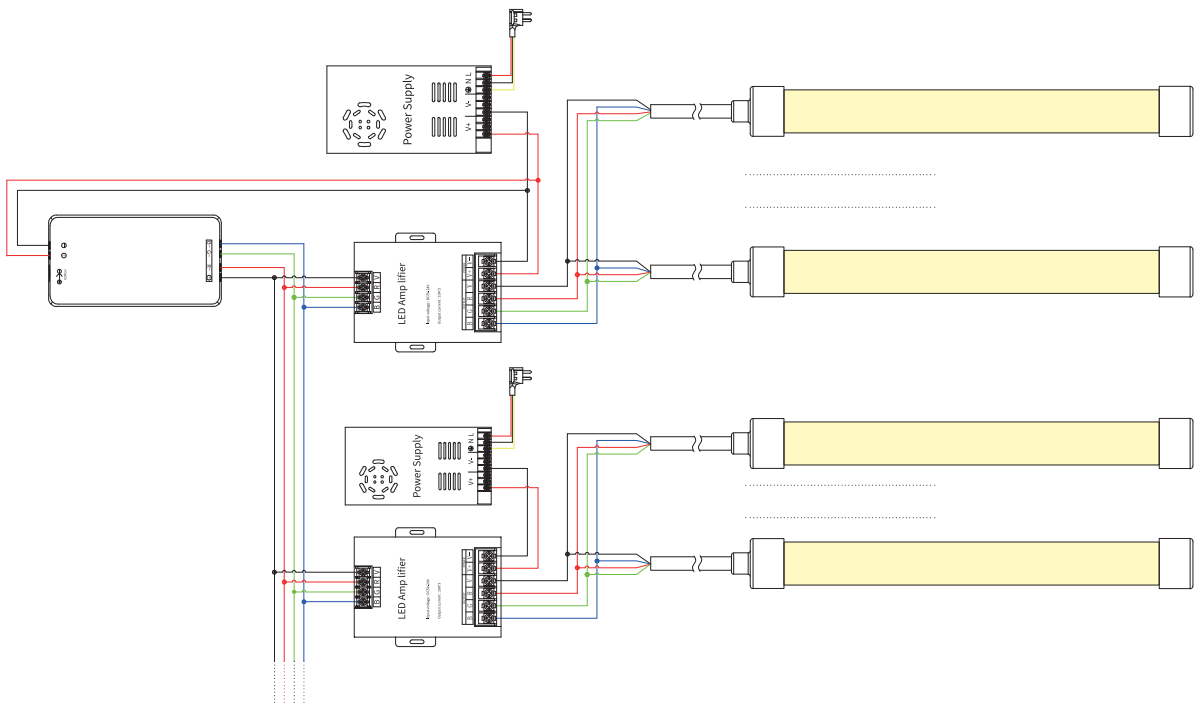



Schematic Diagram of Control System Connection - SPI Signal Type

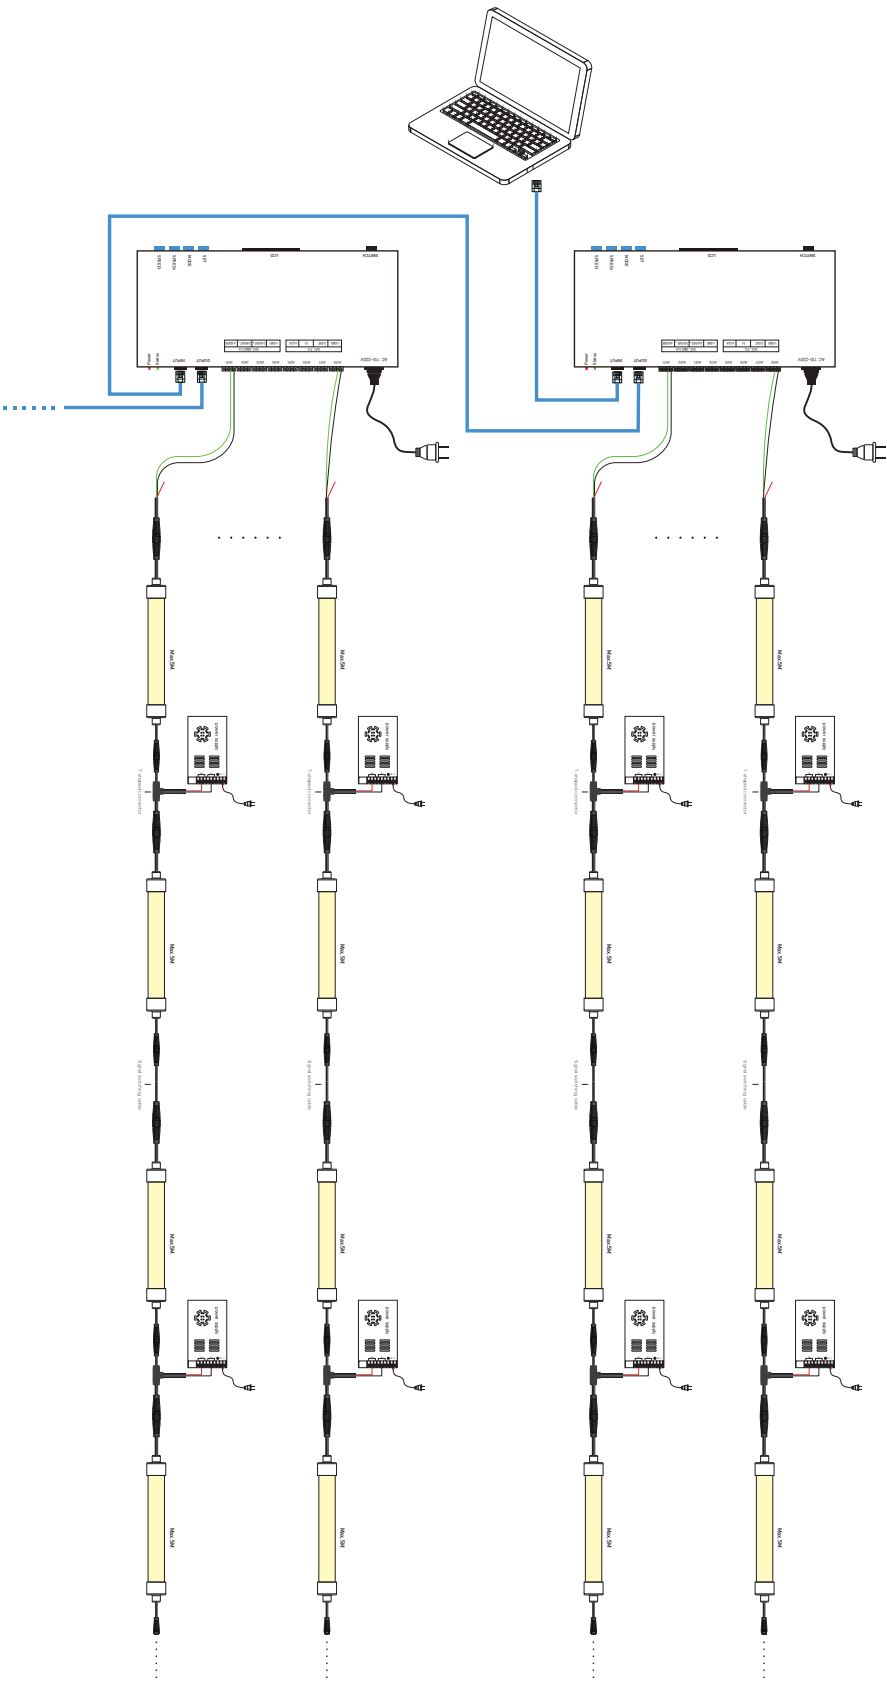

SPI signal type strip light with accessory cable (Unit: mm)

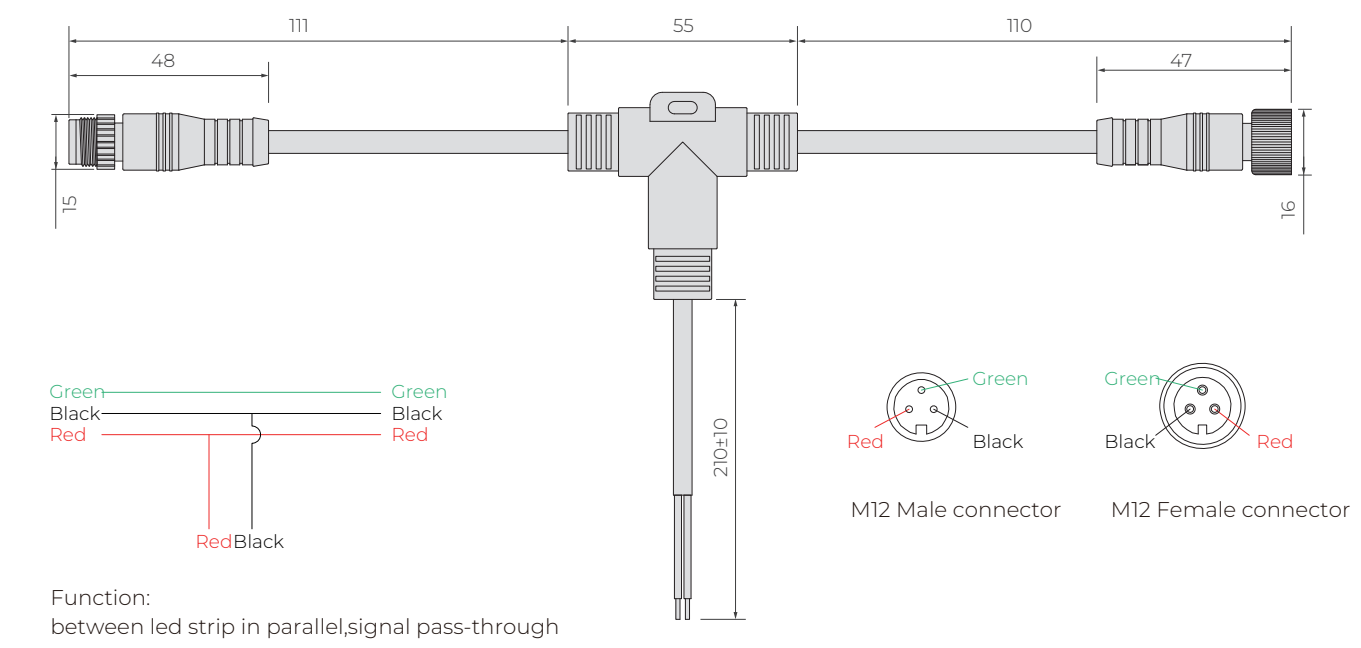

T-type 3 channel connector

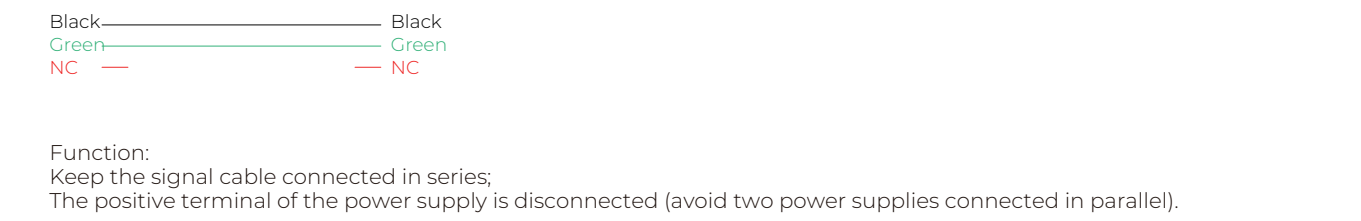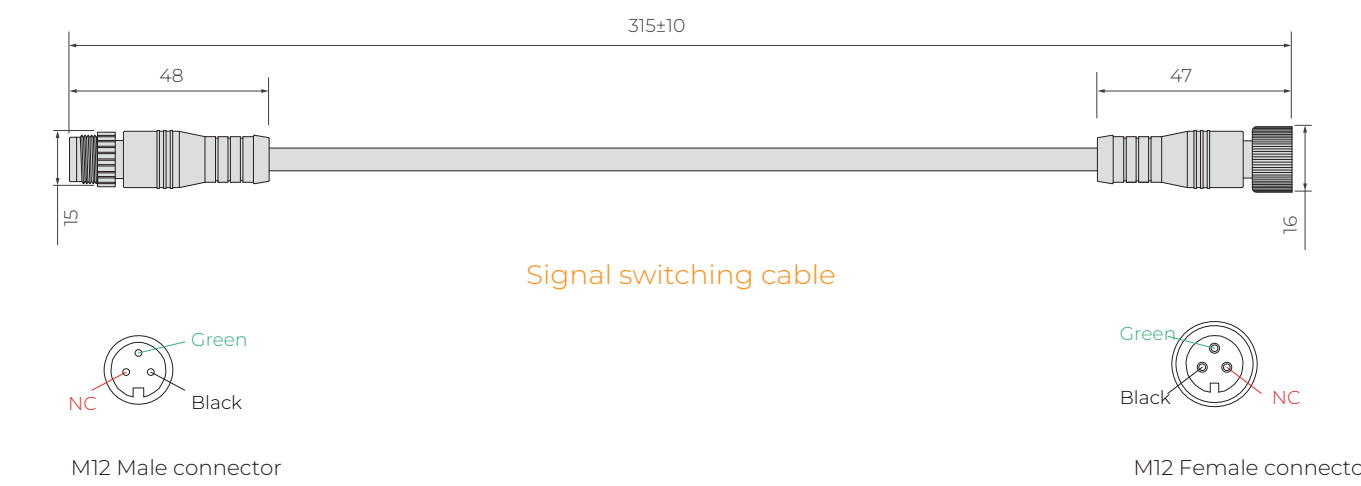


Notes

The selection of the cable specification at the output end of the power supply, it depends on the total current of the load and the length of the cable. It is recommended to select according to the following table:


Current of the light	Specifications of the cable								
	L=1M	L=2M	L=4M	L=6M	L=8M	L=10M	L=12M	L=14M	L=16M
1A	AWG26	AWG23	AWG21	AWG18	AWG18	AWG17	AWG16	AWG15	AWG15
2A	AWG23	AWG21	AWG18	AWG16	AWG15	AWG14	AWG13	AWG12	AWG12
3A	AWG22	AWG18	AWG16	AWG14	AWG13	AWG12	AWG11	AWG11	AWG10
4A	AWG21	AWG18	AWG15	AWG13	AWG12	AWG11	AWG10	AWG9	AWG9
5A	AWG20	AWG17	AWG14	AWG12	AWG11	AWG10	AWG9	AWG9	AWG8
6A	AWG18	AWG16	AWG13	AWG11	AWG10	AWG9	AWG8	AWG8	AWG7
7A	AWG18	AWG15	AWG12	AWG11	AWG9	AWG8	AWG8	AWG7	AWG6
8A	AWG17	AWG15	AWG12	AWG10	AWG9	AWG8	AWG7	AWG7	AWG6
9A	AWG17	AWG14	AWG11	AWG10	AWG8	AWG7	AWG7	AWG6	AWG5
10A	AWG16	AWG14	AWG11	AWG9	AWG8	AWG7	AWG6	AWG6	AWG5

Notes


- ※ The unused light should be sealed with the packaging bag to avoid prolonged exposure.
- ※ Please use DC24V isolated constant voltage power supply with ripple voltage less than 5%. Using other types of power supply may damage the light or cause other safety risks.
- ※ In practical application, 20% allowance should be reserved for power supply to ensure the stability of power supply.
- ※ It is recommended that professionals connect the power supply. Do not connect the power supply with live power to avoid electric shock.
- ※ Please confirm whether the voltage of the power supply is consistent with the voltage of the light; Pay attention to the positive and negative poles of the power cord, do not connect wrong, so as not to cause product damage;
- ※ When multiple power supplies are used, ensure that the positive poles of the power supply are not connected in parallel. Otherwise, the power supply system may be unstable or damaged after long-term operation.
- ※ If the actual application length exceeds the specified length, it will lead to overload, heating and uneven brightness of the light.
- ※ During installation, please do not scratch, twist, or bend the light irregularly. Otherwise, the light may be damaged beyond repair.
- ※ To ensure the life and reliability of the light, please do not over bend the light, which will damage the product itself.
- ※ To protect your eyes, please avoid staring at the glowing surface of the light for a long time.
- ※ Non-professionals are forbidden to install, disassemble and maintain the product.
- ※ Do not use any acid or alkaline adhesive to fix the light (including but not limited to glass glue, etc.)
- ※ IP67 products are not suitable for long-term immersion in water; IP68 products are only customized by the factory. After cutting and processing by users themselves, there is a risk that IP68 protection level cannot be reached
- ※ Because of the difference in structure, even if the same color temperature value, different sizes of light will look slightly different colors. Please confirm it before use.

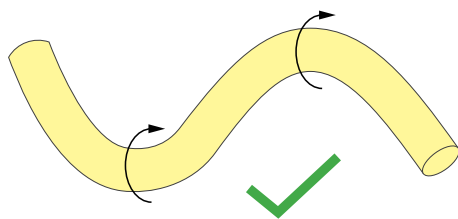


Min Bending diameter $\geq 200\text{mm}$

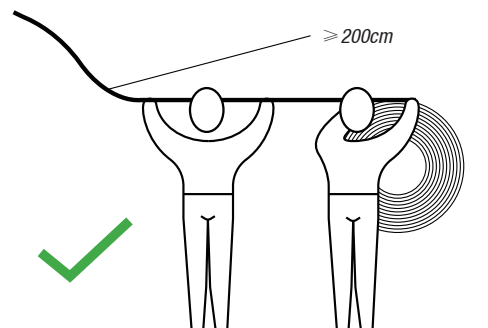

If the length of the light is more than 2 meters, two persons must work together to install it.

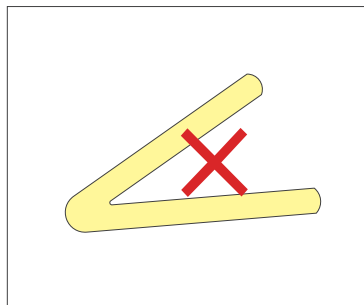

Small Angle bending is prohibited



Prohibit trample

Tests showed that methanol and benzenes will have yellowing effects on silicone.

In the newly decorated interior environment, epoxy floor paint, wall paint, wallpaper adhesive, various decoration materials or new furniture, they are likely to release of methanol and benzenes.

It is recommended to remove methanol and benzenes first, or ventilate for a period of time in the newly decorated interior environment before install the silicone neon light, to avoid affecting the silicone body.

BE A TRUSTED LED STRIP MANUFACTURER

Shenzhen GRILIGHT Technology Co.,Ltd

Tel: +8675527390189 Fax: +8675527397337

Web: www.grilite.com Contact: sale@grilight.com
