
S Shape series 120LED/m-DC12V-6.5mm

Tel:+8675527390189 Web:www.grilite.com Fax:+8675527397337 Contact: sales@grilight.com

#### SMD120LED/m-DC12V-6.5MM

## **SPECIFICATION**



**12** •

**6.5** 

#### **Product features:**

- Free cutting and easy installation
- High brightness chip, stable light effect
- Flexible S-shaped design, easy to bend
- Compatible with multiple aluminum slot lamps
- Widely used and with excellent decorative effects
- Uniform illumination without dark areas or shadows
- Energy saving and durable, with a long-lasting lifespan













## **Application:**

Widely used in hotels, shoppingmalls, furniture, cabinets, shelf as decoration lighting, direct lighting or indirect lighting


















# **Product parameters:**

General parameters		
Product Model	GL-R1000TFS-120HE×28 2835 120leds/meter Bendable S type	
Color WW, NW, O	CW,Red,Green,Bule,Pink,Orange,Yellow	
ССТ	2700K/3000K/4000K/6500K (Special CCT can be customized)	
CRI	Ra≥80	
Beam angle	120°	
Cut Distance	3LEDs/25mm	
Environmental test parame	eters	
IP grade	IP20	
Working environment	<b>-25℃~+45</b> ℃	
Storage environment	-30℃~+80℃	
Max connection Length	5m	

Performance parameters	
Lumen(±5%)	576-648lm/m
Efficiency(±5%)	80-90lm/W
Voltage	DC12V
Electric current	600mA/m
Power	7.2W/m
Packaging parameters	
A roll	5m
N.W(Roll)	80g
Qty/Carton	500m-100roll
Packing size(mm)	L410*W410*H300
G.W	9Kg

# **Connection Diagram:**

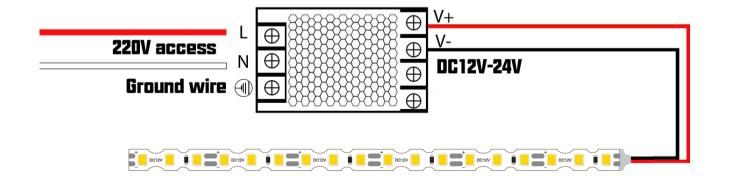










## Package:

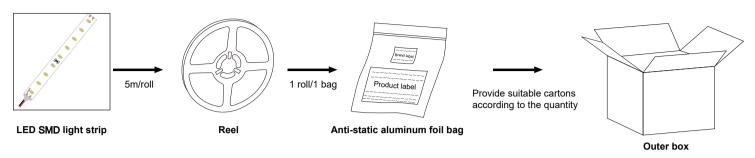


## Installation diagram:



Clean the installation surface




Measure the length you need toinstall, cut at the nearest scissor mark line.




Tear off the double-sided adhesive tape on the back and paste it in a suitable position

For the left led strip, weld at the next scissor mark to connect with other connection wire.



Connect the light strip wire to the driver output port (positive pole to positive pole, negative pole to negative pole)



Turn on the power switch after confirming that the line is connected

#### Statements:

- 1). For safety, the product wire should be moved and replaced by the manufacturer, agent or other authorized person.
- 2). Please refer to the product manual before installation.
- 3). Above-refered schematic diagrams are from our standard product. Please subject to your actual product data if there is difference.
- 4). In actual use, we suggest 80% consumption of the driver. Keep 20% as power to start the led strip.
- 5). For safety, no touch the AC terminal.
- 6). Any acidic or alkaline substance is forbidden.
- 7). No notice for updated of this product.

S Shape series 120LED/m-DC12V-6.5mm










## IP Rating:

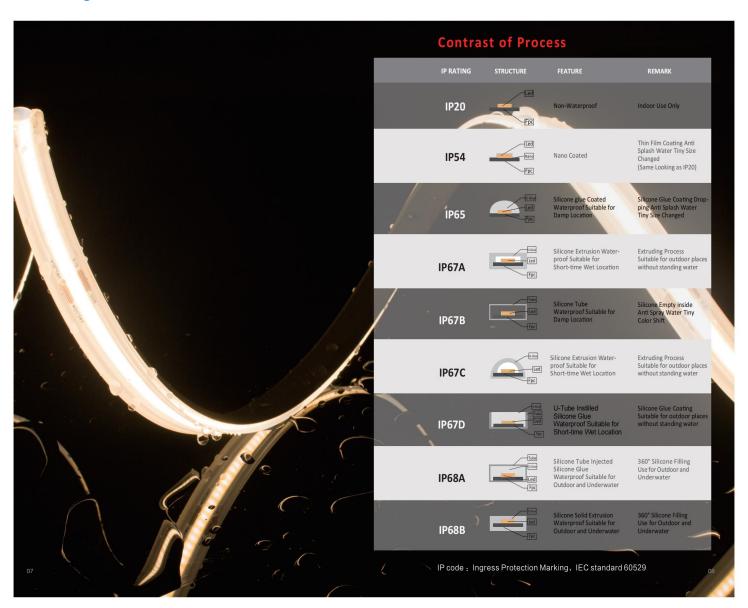

S Shape series 120LED/m-DC12V-6.5mm









Problem	Possible reasons	solution	
All fail	No power supply	Give power supply.	
	Automatic switch-off because of the open circuit and short circuit	Solve the problem, switch on again.	
	Wrong connection (positive connect with negative)	Check and get right connection.	
Part fail	Part power-supply fail	Check and make sure the power	
	Part circuit error	supply well.	
	Part wrong connection(positive connect negative)	Check and get right connection.	
Inconsistent brightness or insuffiscent brightness	overload of the driver	Use higher-power driver.	
	Too big power consumption of the switch, or unbalanced power consumption from different strip series.	Keep the strip working voltage is more or less 5% than the Rated voltage.  1.shorten the connection cable length, or change to thicker cable.  2.Make sure the strip quantity is less than the allowed connection quantity.Keep the led strip quantity of each series similar).	
	Too many Led strips connection	Adjust the led strip quantity, make sure sufficient power supply.	
LED flash	Poor welding connection of wires	Check,find and solve it.	
	switch problem	Change to right switch.	