Tel:+8675527390189 Web:www.grilite.com

Fax:+8675527397337 Contact: sales@grilight.com



RGBCCT-840LED/m-DC24V-12MM

SPECIFICATION



LED Qty

Voltage

FPC width

Product features:

- -With RGB (Red, Green, Blue) combined with W (Dual White), can produce a wide spectrum of colors, including pure whites and vibrant hues, making it versatile for various lighting applications.
- -High density led chips, bighter and allows for vibrant color blending, ideal for decorative, architectural, or mood lighting
- -No flicker, comfortable uniform and ambient lighting, rich and natural colors
- -High-quality FPC circuit board, resistant to bending, strong flexibility, easy to shape
- -IP grade: IP20, IP65,IP66,IP67,IP68 available
- -Long service life, providing 5-year warranty service















Application:

Widely used in hotels, shopping malls, furniture, cabinets, shelves, bars, e-sports game arenas, outdoor lighting landscapes and other scenes, can be used for decorative lighting, direct lighting or indirect lighting

















Product parameters:

Basic parameter:


| Color | WL(NM) | RA | Beam angle | Lumen (Lm/m)±5% | Efficiency (Im/W)±5% | Voltage (V DC) | Electric current (mA/m) | Power(W/m) |
|-------|---------|----|------------|-----------------|----------------------|----------------|-------------------------|------------|
| R | 620-625 | / | 180° | 75 | 25 | 24V | 125 | 3 |
| G | 520-525 | / | 180° | 498 | 83 | 24V | 250 | 6 |
| В | 465-470 | / | 180° | 39 | 13 | 24V | 125 | 3 |
| С | 6000K | / | 180° | 332 | 83 | 24V | 167 | 4 |
| W | 3000K | / | 180° | 415 | 83 | 24V | 208 | 5 |
| RGBCT | - | / | 180° | 1743 | 83 | 24V | 875 | 21 |


Other parameters:

| IP grade | Working environment | Storage environment | Length (m) | Max connection Length (m) | LED Qty (pcs/m) | N.W (g/Roll) |
|----------|---------------------|---------------------|------------|---------------------------|-----------------|--------------|
| IP20 | -25℃~+45℃ | -30°C~+80°C | 5 | 5 | 840 | 175 |

Packaging parameters:

| Packaging material | A roll(m) | A boxful (roll) | Total Qty(m) | size(mm) | G.W(Kg) |
|--------------------|-----------|-----------------|--------------|----------------|---------|
| Carton | 5 | 100 | 500 | L720*W280*H410 | 18.5 |

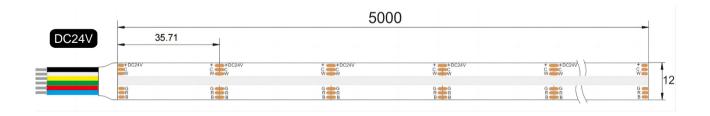














Processing custom waterproof process:

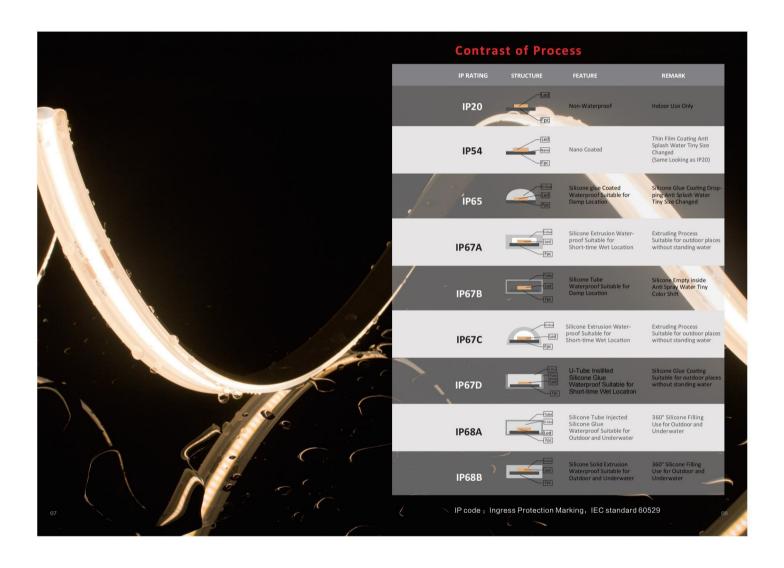










Package:

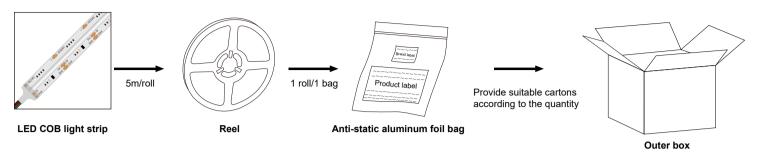


Installation diagram:



Clean the installation surface




Measure the length you need toinstall, cut at the nearest scissor mark line.




Tear off the double-sided adhesive tape on the back and paste it in a suitable position

For the left led strip, weld at the next scissor mark to connect with other connection wire.



Connect the GRBW light belt line to the output port of the controller

Connect the input terminal line of the controller to the power supply, (positive pole to positive pole, negative pole to negative pole)



Turn on the power switch after confirming that the line is connected

Statements:

- 1). For safety, the product wire should be moved and replaced by the manufacturer, agent or other authorized person.
- 2). Please refer to the product manual before installation.
- 3). Above-refered schematic diagrams are from our standard product. Please subject to your actual product data if there is difference.
- 4). In actual use, we suggest 80% consumption of the driver. Keep 20% as power to start the led strip.
- 5). For safety, no touch the AC terminal.
- 6). Any acidic or alkaline substance is forbidden.
- 7). No notice for updated of this product.









| Problem | Possible reasons | solution | |
|---|---|--|--|
| | No power supply | Give power supply. | |
| All fail | Automatic switch-off because of the open circuit and short circuit | Solve the problem, switch on again. | |
| | Wrong connection (positive connect with negative) | Check and get right connection. | |
| | Part power-supply fail | Check and make sure the power supply well. | |
| Part fail | Part circuit error | | |
| | Part wrong connection(positive connect negative) | Check and get right connection. | |
| | overload of the driver | Use higher-power driver. | |
| Inconsistent brightness or insuffiscent brightness | Too big power consumption of the switch, or unbalanced power consumption from different strip series. | Keep the strip working voltage is more or less 5% than the Rated voltage. 1.shorten the connection cable length, or change to thicker cable. 2.Make sure the strip quantity is less than the allowed connection quantity. Keep the led strip quantity of each series similar). | |
| | Too many Led strips connection | Adjust the led strip quantity, make sure sufficient power supply. | |
| LED flash | Poor welding connection of wires | Check,find and solve it. | |
| | switch problem | Change to right switch. | |