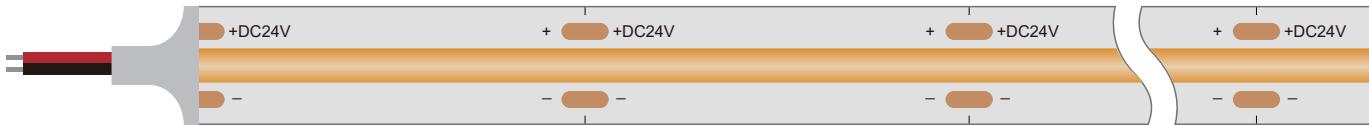


COB480LED/m-DC24V-8MM-20M-No voaltage drop**SPECIFICATION**

480.
LED Qty

24.
Voltage

8.
FPC width

8.
Power

Product features:

- High-quality double-sided copper FPC board, flexible and resistant to bending, strong and durable
- Only one end of the power supply is required, and there is no pressure drop within 10 meters
- High-brightness energy-saving chips, the light efficiency per meter can reach 80~90Lm/W
- 120° illumination angle, high CRI, no spot, no flicker
- IP20 is not waterproof (can be processed to customize IP65\IP67\IP68 protection level)
- Precise production, quality assurance, 5-year warranty
- Support special customization and sample customization

**Application:**

Widely used in hotels, shopping malls, furniture, cabinets, shelves as decoration lighting, direct lighting or indirect lighting



Product parameters:

General parameters

Product Model GL-R1000TF-480xCOB
COB 480leds/meter
Constant Current IC
20M no Voltage Drop

Color WW, NW, CW

CCT(K) 2700K/3000K/4000K/6000K

CRI Ra≥90

Beam angle 120°

Cut Distance 50mm

Environmental test parameters

IP grade IP20

Working environment -25°C ~+45°C

Storage environment -30°C ~+80°C

Max connection Length 10m

Performance parameters

Lumen(±5%) 800~880lm/m

Efficiency(±5%) 100~110lm/W

Voltage DC24V

Electric current 333mA/m

Power 8W/m

Packaging parameters



A roll 10m

N.W(Roll) 160g

Qty/Carton 500m/50roll

Packing size(mm) L720*W280*H410

G.W 8Kg

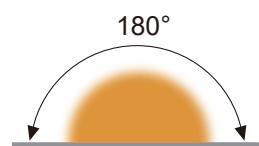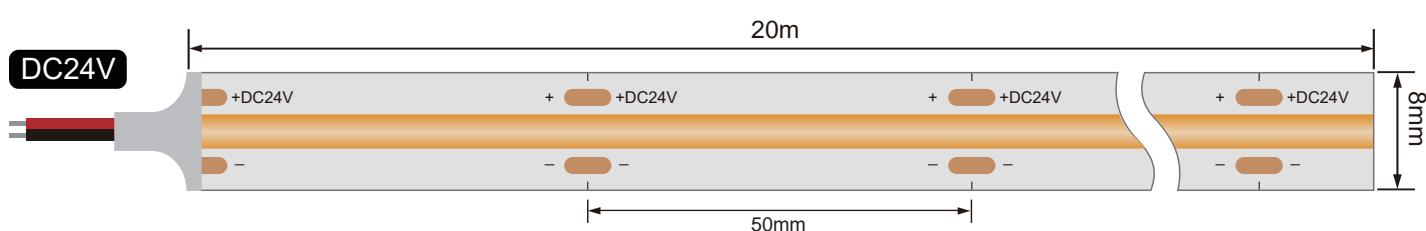



QUALITY



HONESTY



SERVE




INNOVATION

Processing custom waterproof process:



Contrast of Process


IP RATING	STRUCTURE	FEATURE	REMARK
IP20		Non-Waterproof	Indoor Use Only
IP54		Nano Coated	Thin Film Coating Anti Splash Water Tiny Size Changed (Same Looking as IP20)
IP65		Silicone glue Coated Waterproof Suitable for Damp Location	Silicone Glue Coating Dripping Anti Splash Water Tiny Size Changed
IP67A		Silicone Extrusion Waterproof Suitable for Short-time Wet Location	Extruding Process Suitable for outdoor places without standing water
IP67B		Silicone Tube Waterproof Suitable for Damp Location	Silicone Empty inside Anti Spray Water Tiny Color Shift
IP67C		Silicone Extrusion Waterproof Suitable for Short-time Wet Location	Extruding Process Suitable for outdoor places without standing water
IP67D		U-Tube Instilled Silicone Glue Waterproof Suitable for Short-time Wet Location	Silicone Glue Coating Suitable for outdoor places without standing water
IP68A		Silicone Tube Injected Silicone Glue Waterproof Suitable for Outdoor and Underwater	360° Silicone Filling Use for Outdoor and Underwater
IP68B		Silicone Solid Extrusion Waterproof Suitable for Outdoor and Underwater	360° Silicone Filling Use for Outdoor and Underwater

IP code : Ingress Protection Marking, IEC standard 60529


07

08


Package:

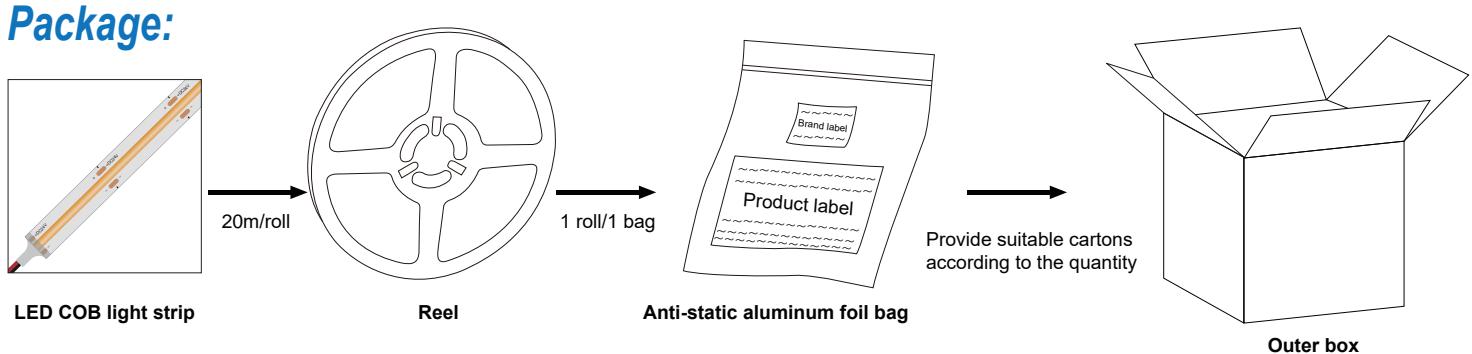


Installation diagram:

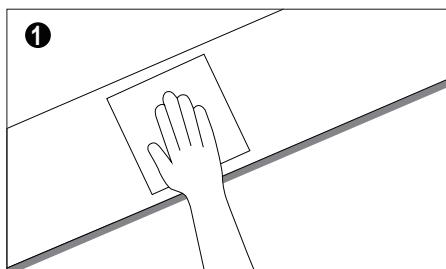

Clean the installation surface

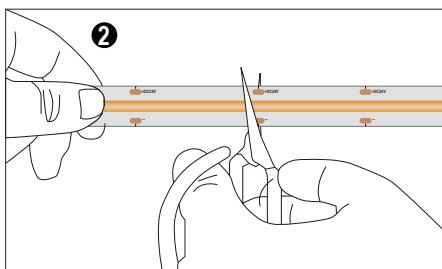


Measure the length you need to install, cut at the nearest scissor mark line.

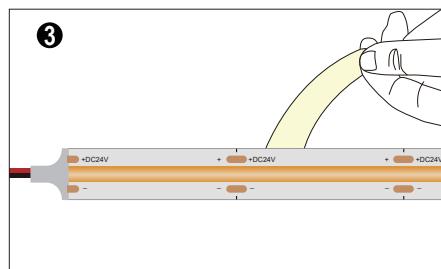


Tear off the double-sided adhesive tape on the back and paste it in a suitable position

For the left led strip, weld at the next scissor mark to connect with other connection wire.

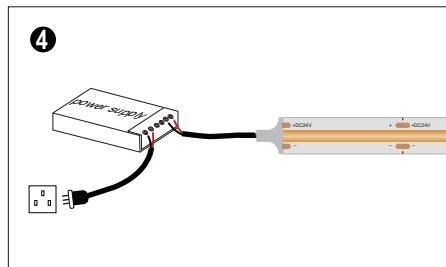

Connect the light strip wire to the driver output port (positive pole to positive pole, negative pole to negative pole)

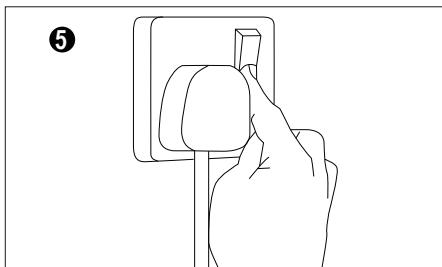

Turn on the power switch after confirming that the line is connected

Statements :

- 1). For safety, the product wire should be moved and replaced by the manufacturer, agent or other authorized person.
- 2). Please refer to the product manual before installation.
- 3). Above-refered schematic diagrams are from our standard product. Please subject to your actual product data if there is difference.
- 4). In actual use, we suggest 80% consumption of the driver. Keep 20% as power to start the led strip.
- 5). For safety, no touch the AC terminal.
- 6). Any acidic or alkaline substance is forbidden.
- 7). No notice for updated of this product.



Problem	Possible reasons	solution
All fail	● No power supply	Give power supply.
	● Automatic switch-off because of the open circuit and short circuit	Solve the problem, switch on again.
	● Wrong connection (positive connect with negative)	Check and get right connection.
Part fail	● Part power-supply fail	Check and make sure the power supply well.
	● Part circuit error	
	● Part wrong connection(positive connect negative)	Check and get right connection.
Inconsistent brightness or insufficient brightness	● overload of the driver	Use higher-power driver.
	● Too big power consumption of the switch, or unbalanced power consumption from different strip series.	Keep the strip working voltage is more or less 5% than the Rated voltage. 1.shorten the connection cable length, or change to thicker cable. 2.Make sure the strip quantity is less than the allowed connection quantity.Keep the led strip quantity of each series similar).
	● Too many Led strips connection	Adjust the led strip quantity, make sure sufficient power supply.
LED flash	● Poor welding connection of wires	Check,find and solve it.
	● switch problem	Change to right switch.