


140LM/W-COB480LEDS-DC24V-8MM-10.5W

SPECIFICATION



480.
LED Qty

24.
Voltage

8.
FPC width

10.5.
Power
W/m

Product features:

- Dot-free output creates a clean linear effect
- High efficiency helps reduce power consumption
- Single color temperature ensures stable light output
- Low glare improves visual comfort
- Low heat supports longer service life
- Flexible structure allows easy installation
- 480-LED COB design provides smooth and even lighting

**Application:**

Widely used in hotels, shopping malls, furniture, cabinets, shelves as decoration lighting, direct lighting or indirect lighting





Product parameters:

General parameters

Product Model	GL-R1000TF-480xCOB COB 480 leds/meter
Color	WW, NW, CW,
CCT	2700K- 6000K
CRI	Ra > 90
Beam angle	120°
Cut Distance	50mm

Environmental test parameters



IP grade	IP20
Working environment	-25°C ~+45°C
Storage environment	-30°C ~+80°C
Max connection Length	5m

Performance parameters

Lumen($\pm 5\%$)	1470lm/m
Efficiency($\pm 5\%$)	140lm/W
Voltage	DC24V
Electric current	437.5mA/m
Power	10.5W/m

Packaging parameters

A roll	5m
N.W(Roll)	80g
Qty/Carton	500m-100roll
Packing size(mm)	L720*W280*H410
G.W	9Kg

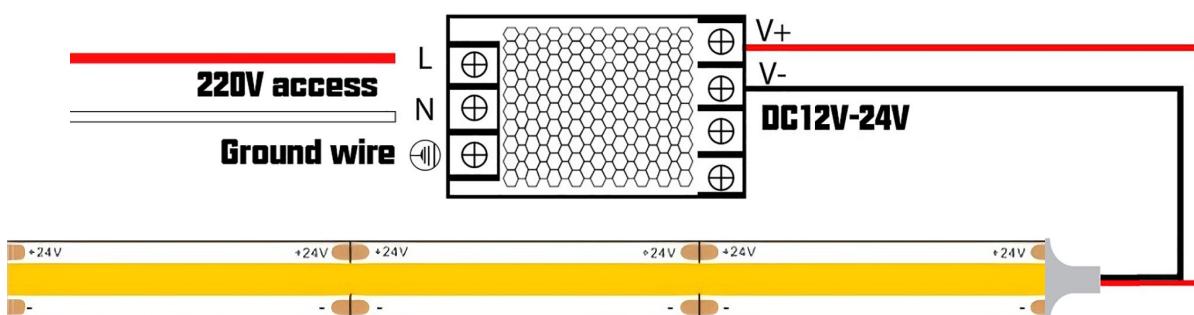

Processing custom waterproof process:




Contrast of Process

IP RATING	STRUCTURE	FEATURE	REMARK
IP20		Non-Waterproof	Indoor Use Only
IP54		Nano Coated	Thin Film Coating Anti Splash Water Tiny Size Changed (Same Looking as IP20)
IP65		Silicone glue Coated Waterproof Suitable for Damp Location	Silicone Glue Coating Dripping Anti Splash Water Tiny Size Changed
IP67A		Silicone Extrusion Waterproof Suitable for Short-time Wet Location	Extruding Process Suitable for outdoor places without standing water
IP67B		Silicone Tube Waterproof Suitable for Damp Location	Silicone Empty inside Anti Spray Water Tiny Color Shift
IP67C		Silicone Extrusion Waterproof Suitable for Short-time Wet Location	Extruding Process Suitable for outdoor places without standing water
IP67D		U-Tube Instilled Silicone Glue Waterproof Suitable for Short-time Wet Location	Silicone Glue Coating Suitable for outdoor places without standing water
IP68A		Silicone Tube Injected Silicone Glue Waterproof Suitable for Outdoor and Underwater	360° Silicone Filling Use for Outdoor and Underwater
IP68B		Silicone Solid Extrusion Waterproof Suitable for Outdoor and Underwater	360° Silicone Filling Use for Outdoor and Underwater


IP code : Ingress Protection Marking, IEC standard 60529

07
08

Package:

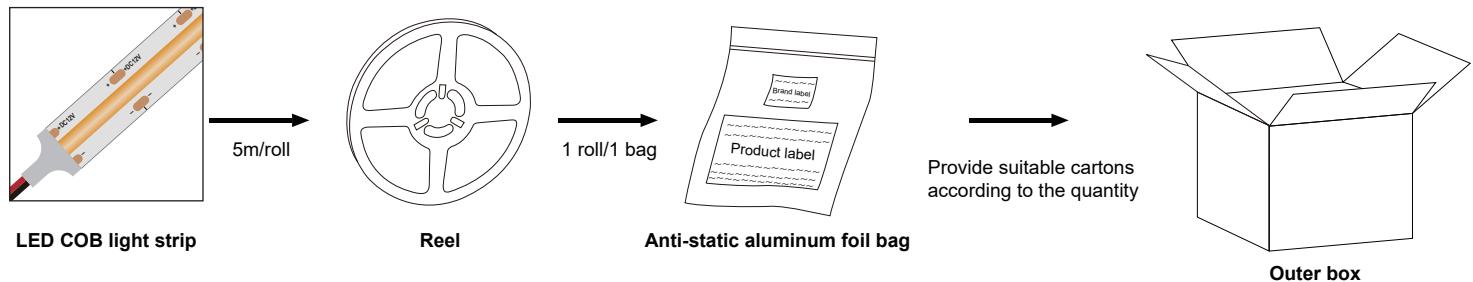

Installation diagram:

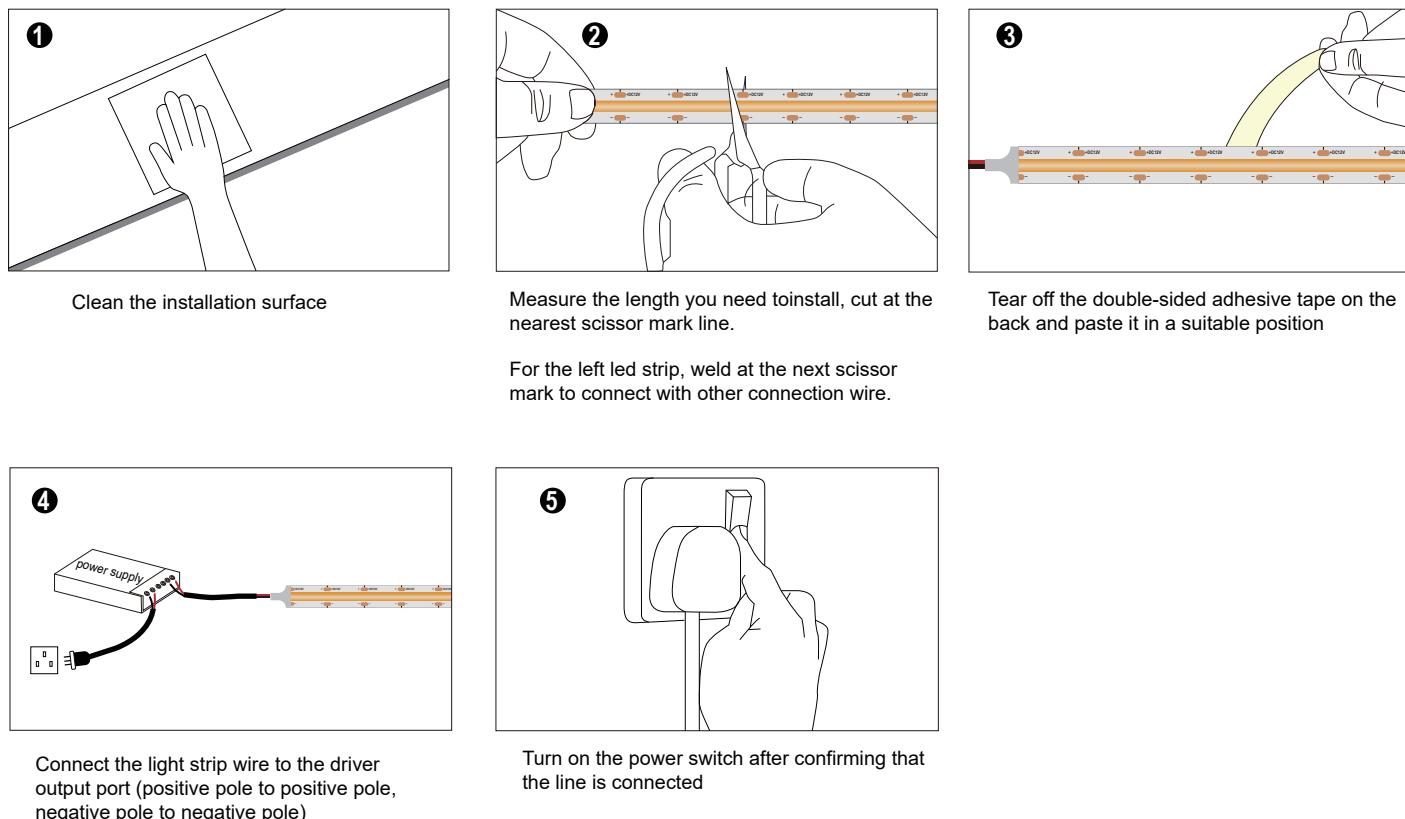

Statements :

- 1). For safety, the product wire should be moved and replaced by the manufacturer, agent or other authorized person.
- 2). Please refer to the product manual before installation.
- 3). Above-refered schematic diagrams are from our standard product. Please subject to your actual product data if there is difference.
- 4). In actual use, we suggest 80% consumption of the driver. Keep 20% as power to start the led strip.
- 5). For safety, no touch the AC terminal.
- 6). Any acidic or alkaline substance is forbidden.
- 7). No notice for updated of this product.



Problem	Possible reasons	solution
All fail	● No power supply	Give power supply.
	● Automatic switch-off because of the open circuit and short circuit	Solve the problem, switch on again.
	● Wrong connection (positive connect with negative)	Check and get right connection.
Part fail	● Part power-supply fail	Check and make sure the power supply well.
	● Part circuit error	
	● Part wrong connection(positive connect negative)	Check and get right connection.
Inconsistent brightness or insufficient brightness	● overload of the driver	Use higher-power driver.
	● Too big power consumption of the switch, or unbalanced power consumption from different strip series.	Keep the strip working voltage is more or less 5% than the Rated voltage. 1.shorten the connection cable length, or change to thicker cable. 2.Make sure the strip quantity is less than the allowed connection quantity.Keep the led strip quantity of each series similar).
	● Too many Led strips connection	Adjust the led strip quantity, make sure sufficient power supply.
LED flash	● Poor welding connection of wires	Check,find and solve it.
	● switch problem	Change to right switch.