

LED Switching Power Supply

- Conversion efficiency: 93%;
- Crimp type wiring, flexible installation;
- High power density, small size, high only 23mm, saving installation space;
- 100% full load burn-in test,
- Suitable for internal lights application for I / II / III.
- Equipped with over temperature, over current protection, short circuit pr
- Widely used in LED lighting and IT equipment
- Compliance to worldwide safety regulation for led lightings.




SELV




Specification

Model		GL-PSU12T-200W		GL-PSU24T-200W	
OUTPUT	Output voltage	12VDC		24VDC	
	Output voltage range	12VDC±0.5VDC		24VDC±0.5VDC	
	Output current	Max 16.66A		Max 8.33A	
	Output power	Max 200W			
	Output power range	0~200W			
	Linear Regulation	±1%			
	Load Regulation	±1%			
	Start-up Time (Typ)	500ms/230Vac or 110Vac			
	Hold Up Time (Typ)	12ms/230Vac or 110Vac			
INPUT	Input voltage	190-264Vac			
	Frequency	50Hz or 60Hz			
	Input current	1.5A/230Vac or 3.3A/110Vac			
	Powerfactor	PF>0.55			
	No-load power consumption	< 0.5W			
	Efficiency (typ.)	92%	92%	93%	93%
	Inrush current (typ.)	Cold start 65A at 230Vac			
	Control surge capability	L,N:1KV L,N-PE:2KV			
	Leakage current	Max. 0.5mA			
ENVIRONMENT	Working temperature	ta: -30°C~ 50°C tc: 80°C			
	Working humidity	20 ~ 99%RH, non-condensing			
	Storage temp., humidity	-40°C ~ 80°C, 10~95%RH			
PROTECTION	Overtemperature	Protection type: Turn off the output voltage, after the temperature drops, re-energize to restore.			
	Over load protection	Shut down the output when current load ≥110%~150%, auto recovers.			
	Short circuit protection	Protection type: It can be automatically restored after the fault is eliminated.			
SAFETY & EMC	Withstand voltage	I/P-O/P:2000Vac			
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH			
	EMC Test Standards	EN55015:2013;EN61547:2009; EN61000-3-2:2014; EN61000-3-3:2013			
Reliability and Quality Control	Impact aging	100% of the product is fully loaded and impacted for 4 hours under an environment of at least 40°C ± 5°C			
	Component derating	Under the steady-state conditions of rated input and output, the stress of components will not exceed its maximum nominal value			
NOTE	1. All parameters not specifically mentioned are measured at 230VAC input, rated load and 25°C ambient temperature. 2. Ensure that the power supply is used under the rated parameters and environment.				


Dimensions
Unit:mm

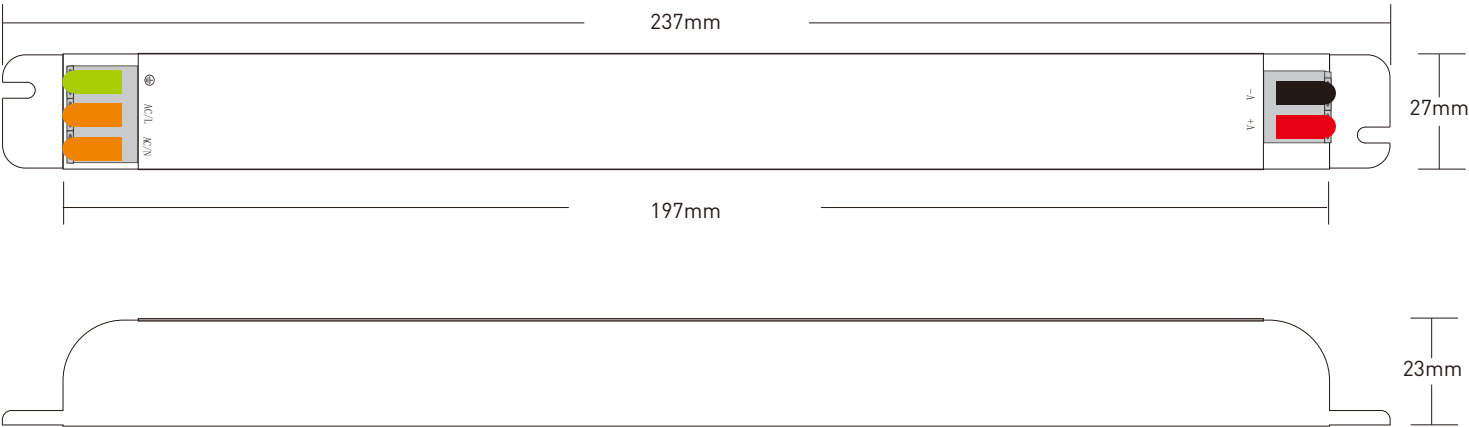

Relationship diagrams

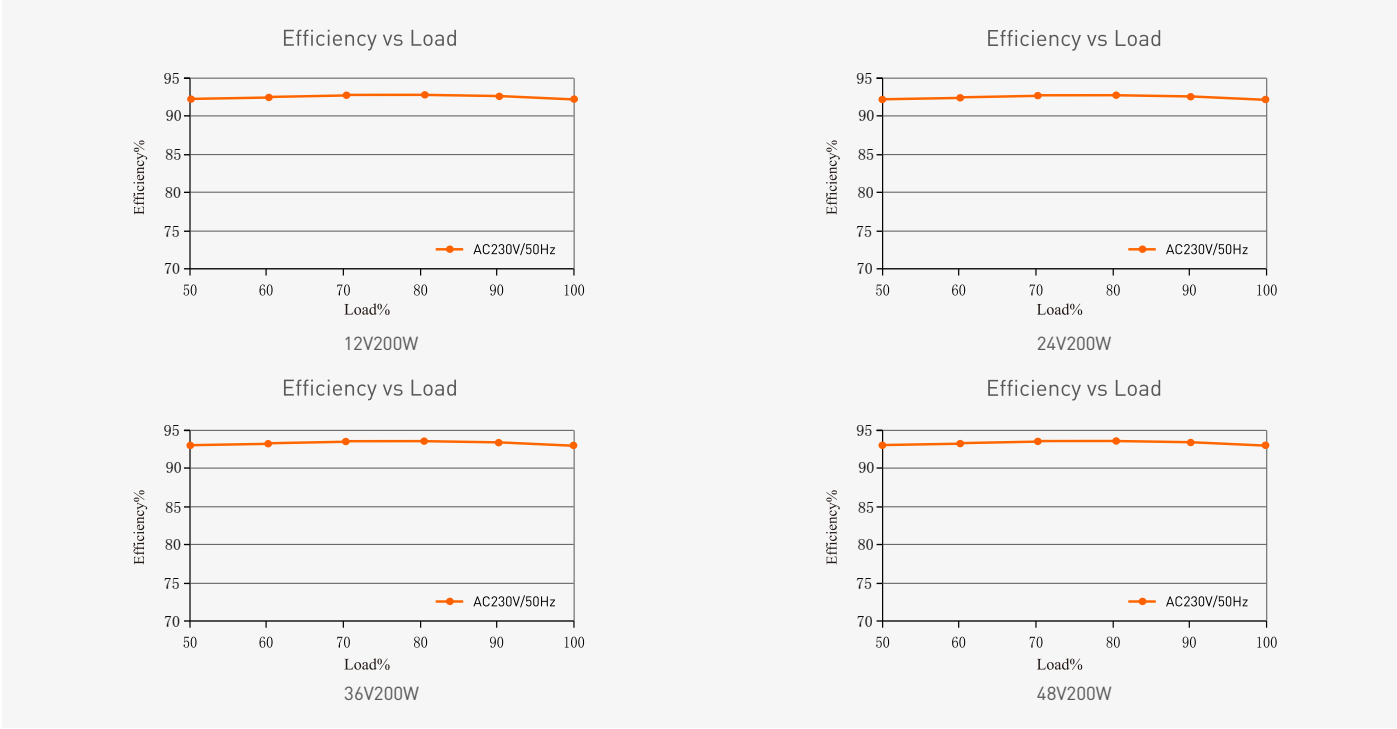

Temperature load curve

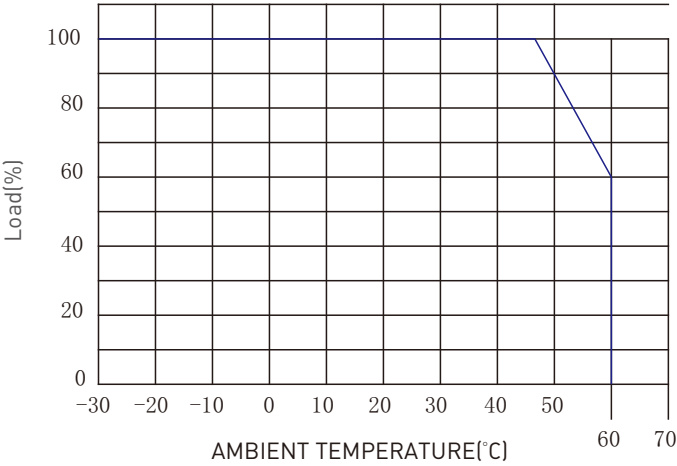

Packaging Information

DIMENSION	237x27x23mm(LxWxH)
PACKING	238.5x29x24.5mm(LxWxH)
CARTON QUANTITY	50PCS
CARTON SIZE	306x251x148mm(LxWxH)
WEIGHT	241g±10g/PCS

* No further notice if any changes in the manual. Product function depends on the goods. Please feel free to contact your supplier if any question.