# **Product Specifications**



PRODUCT NANE: DIMMER MODEL: XDIMMER-1CH-30A

#### **Summarization**

XDimmer-1CH-30A, a signal channel dimmer which can adjust brightness infinitely, its control mode is knob-operated control, you could adjust light to the appropriate lighting brightness in accordance with your actual need.

## **Technical parameters**

Working temperature: -20-60 °C
Supply voltage: DC12-24V

• Output: 1 channel

External dimension: L85XW62XH35mmPacking size: L96 X W64 X H65 mm


Net weight: 120 gGross weight: 125g

• Static power consumption: <1 W

• Output current: <30 A

Power output: 12V<360W,24V<720W</li>

### **External Dimension**

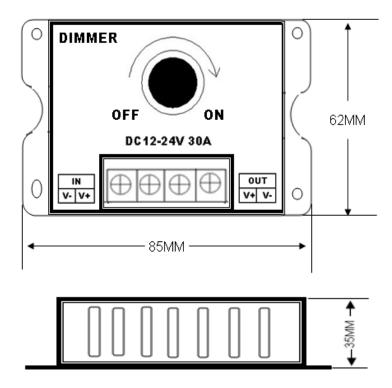

## **Direction for use**

- 1. Connect the load wire at first, following by the power wire;
- 2. Adopt rotary button, its function as follows:

Rotate button to the right, brightness will be brighter, when you rotate it to the far right, the brightness is greatest.

Rotate button to the left,brightness will be darker,when you rotate it to the far left,the light will be turned off.

## **Typical Applications**

