
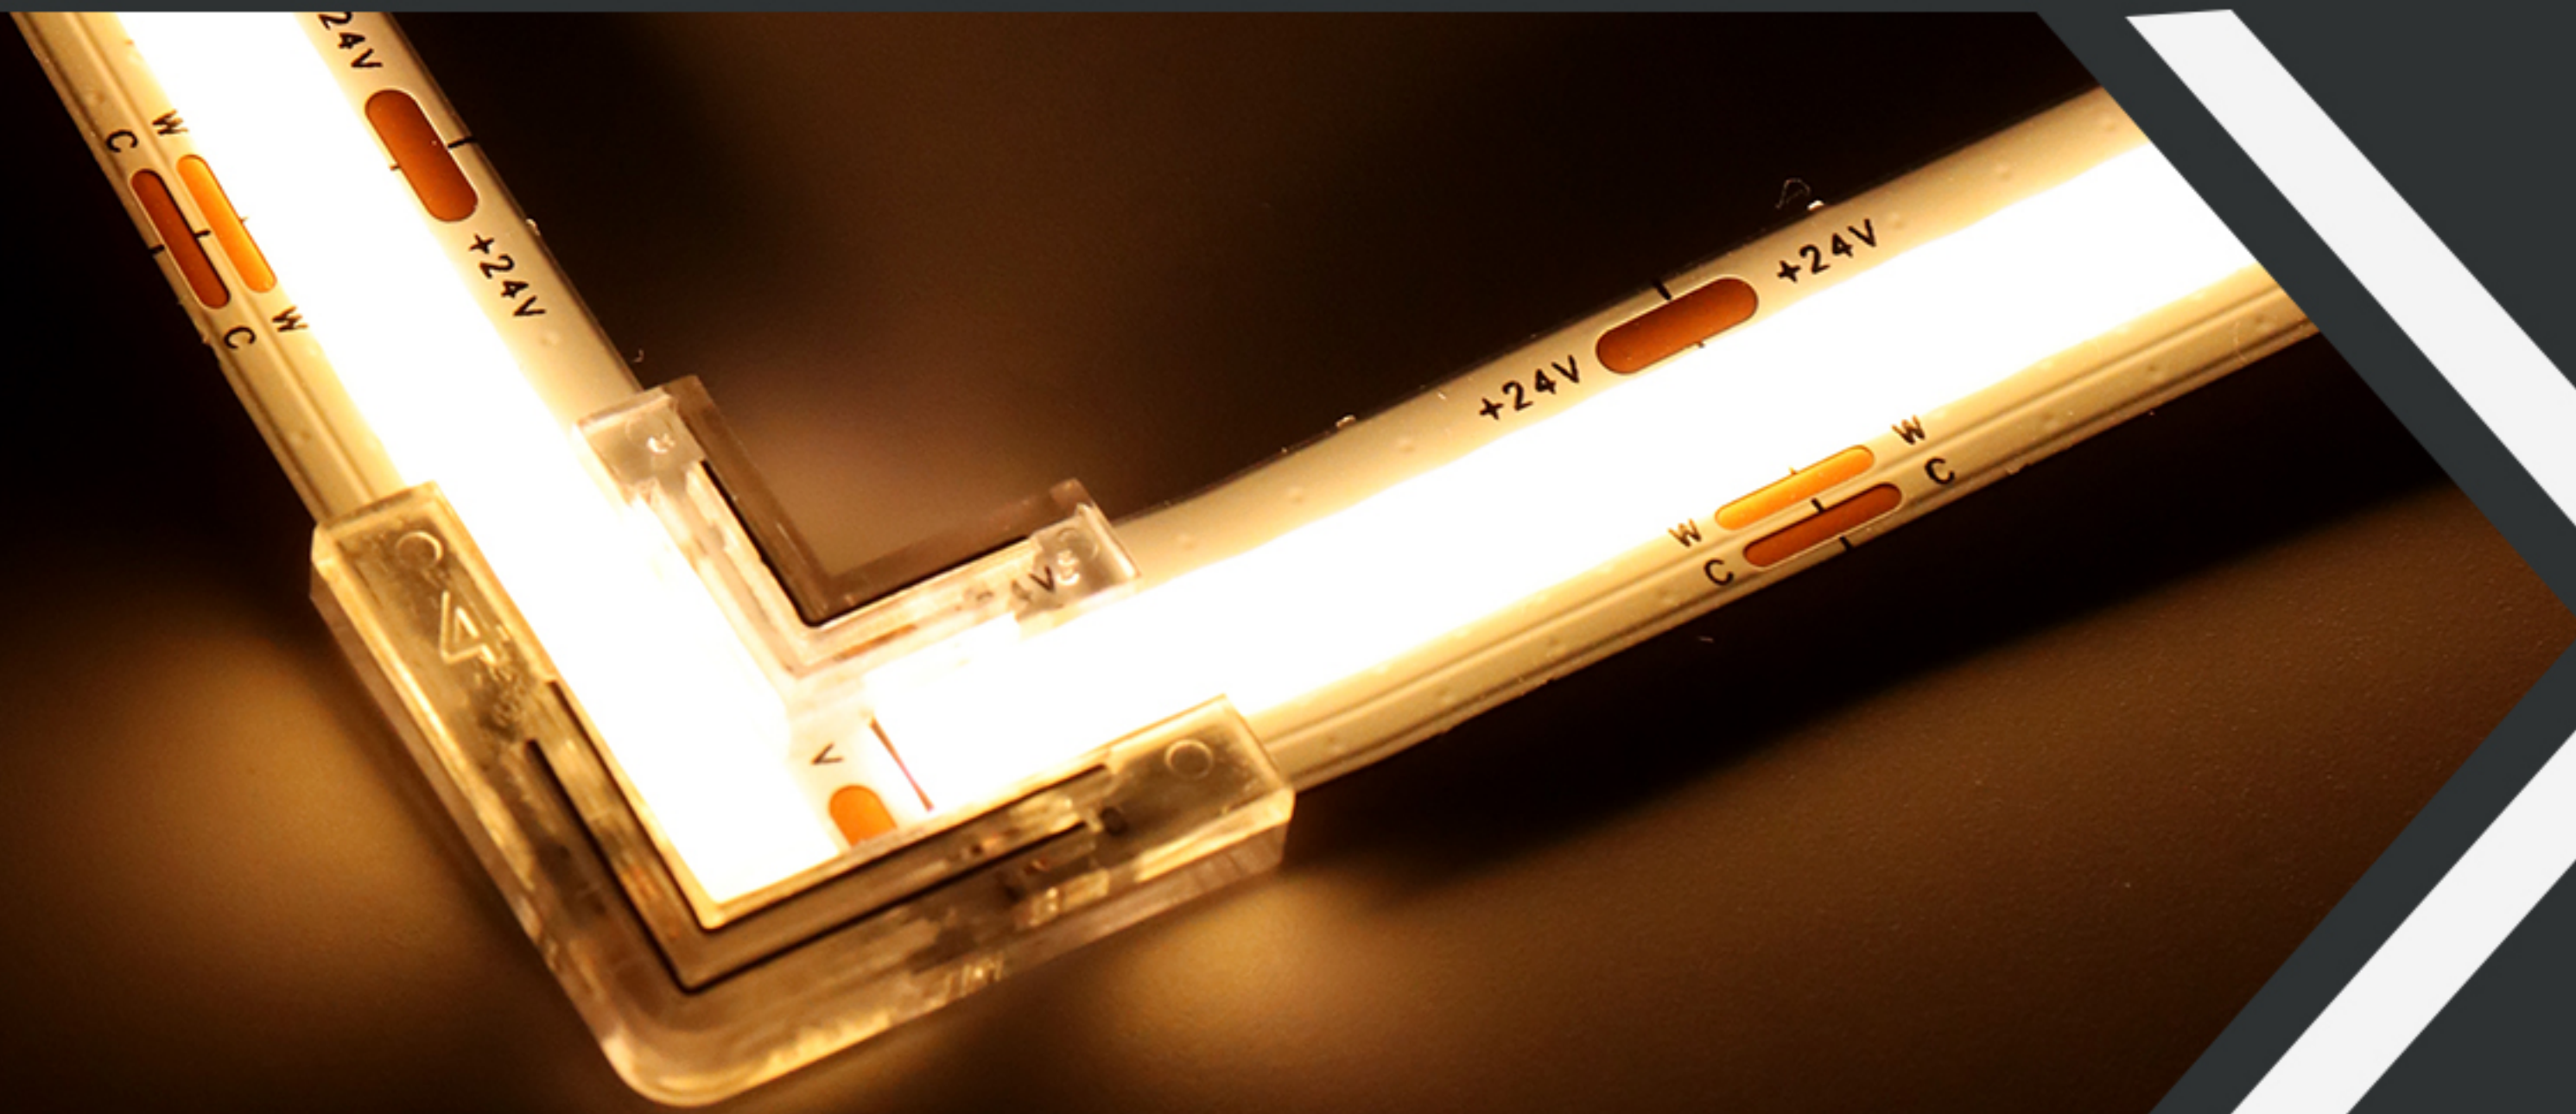


GRILITELUX

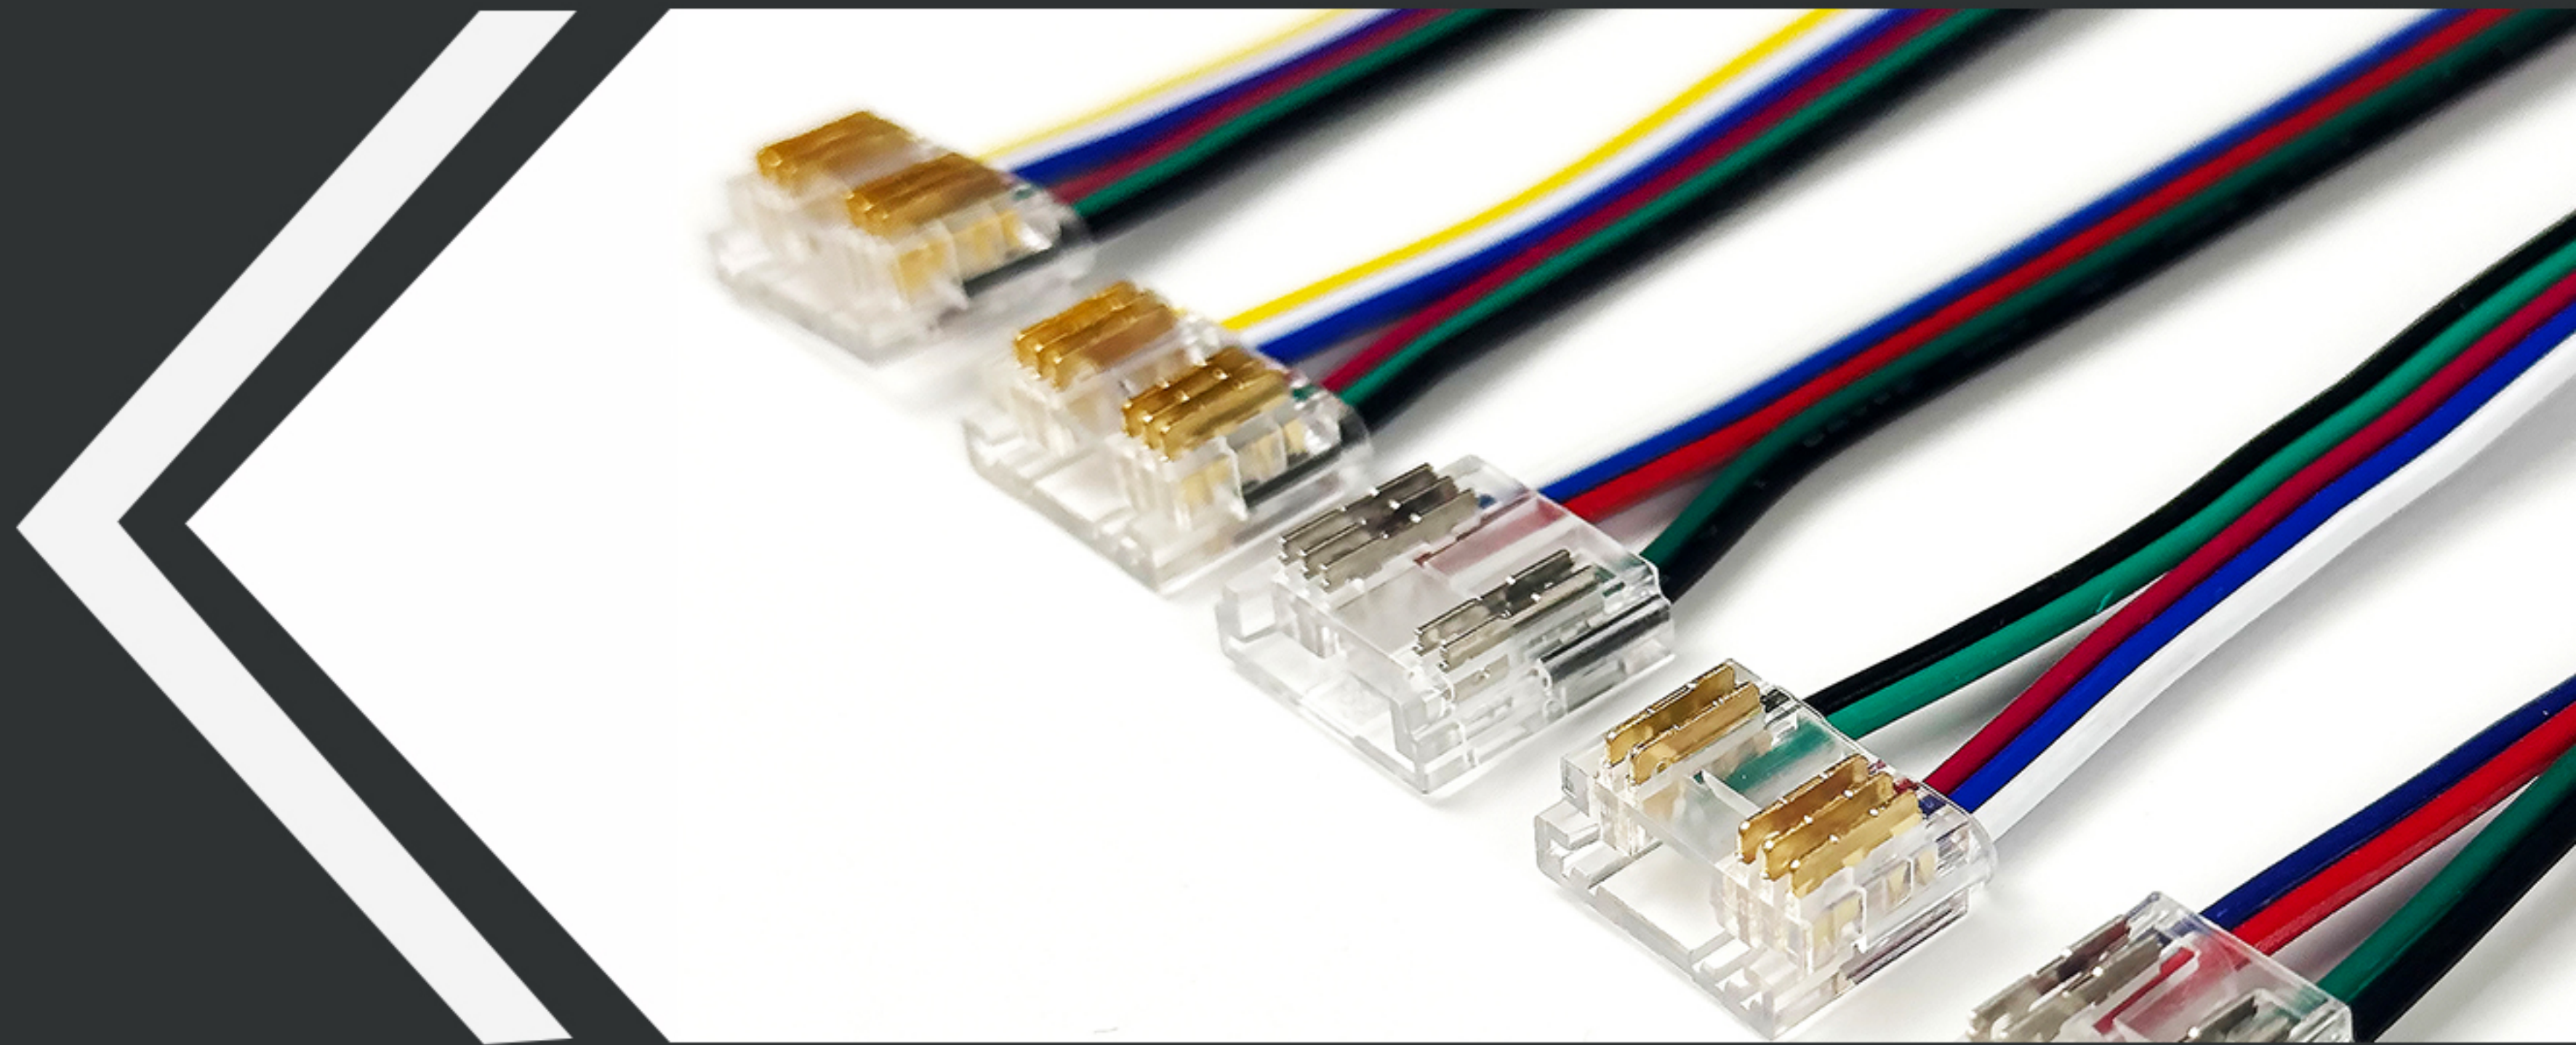

Connector

Shenzhen Grilight Technology Co.,Ltd


Tel:+8675527390189

Fax:+8675527397337

Web: www.grilite.com

Contact: sale@grilight.com


COB LED CONNECTOR

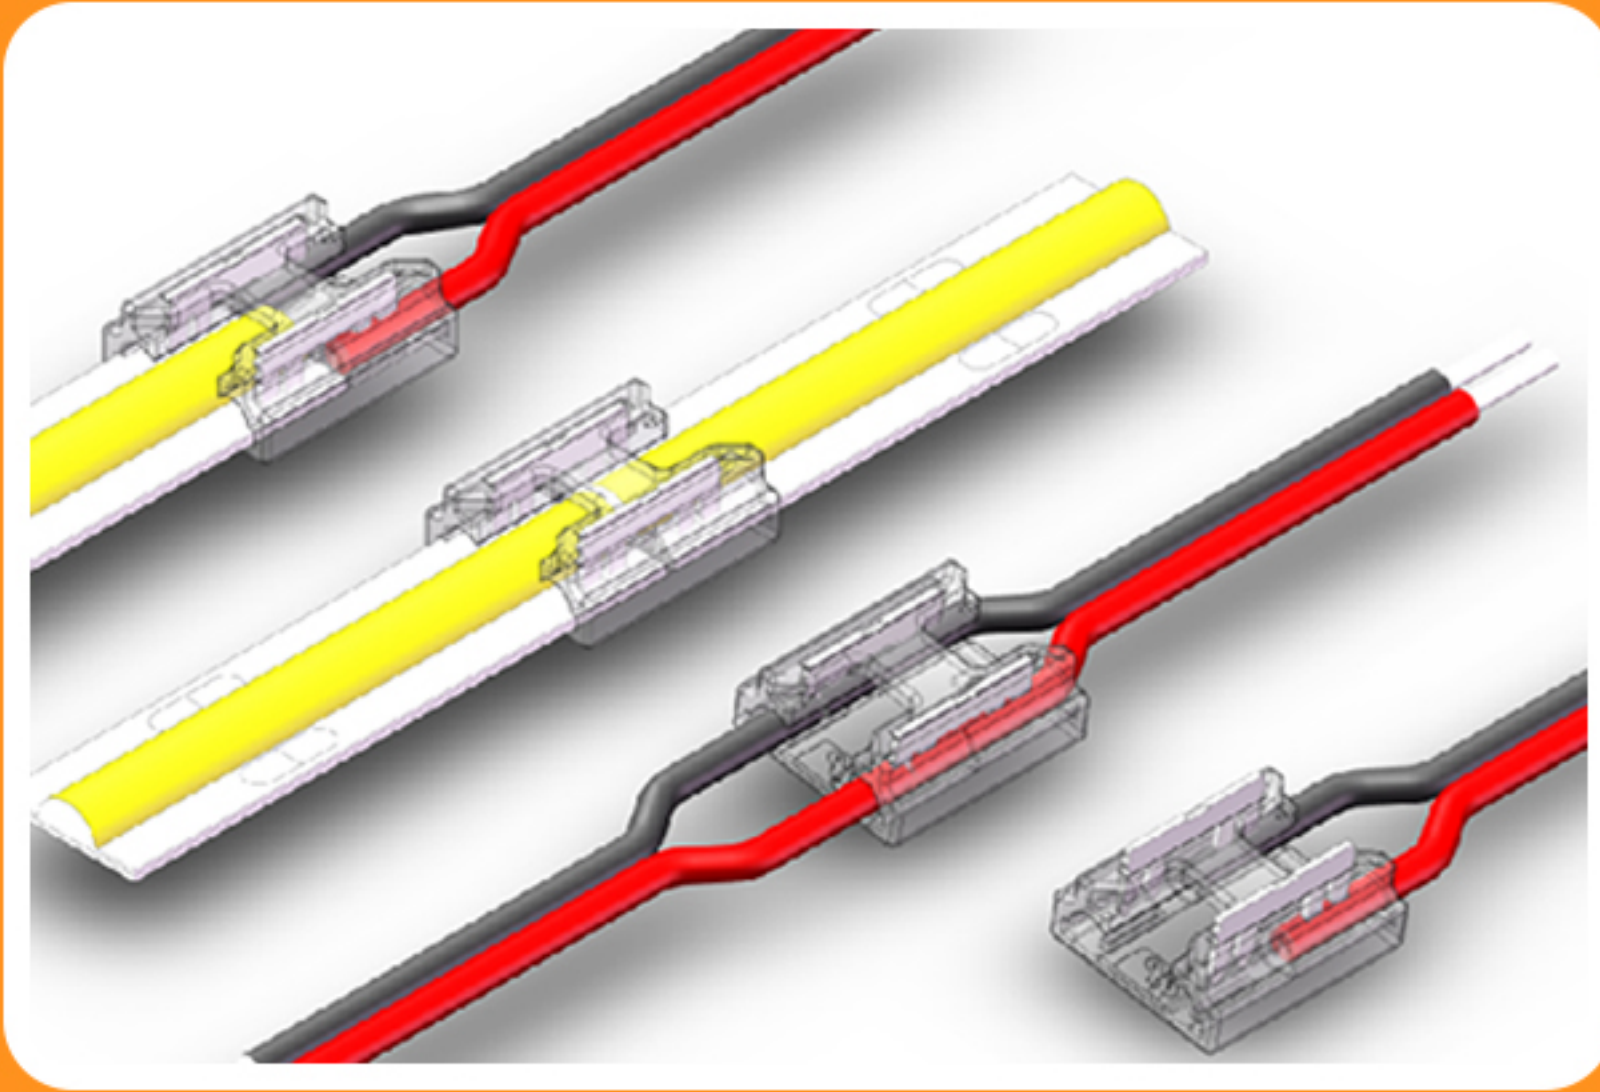

4IN1 CONNECTOR



9IN1 CONNECTOR

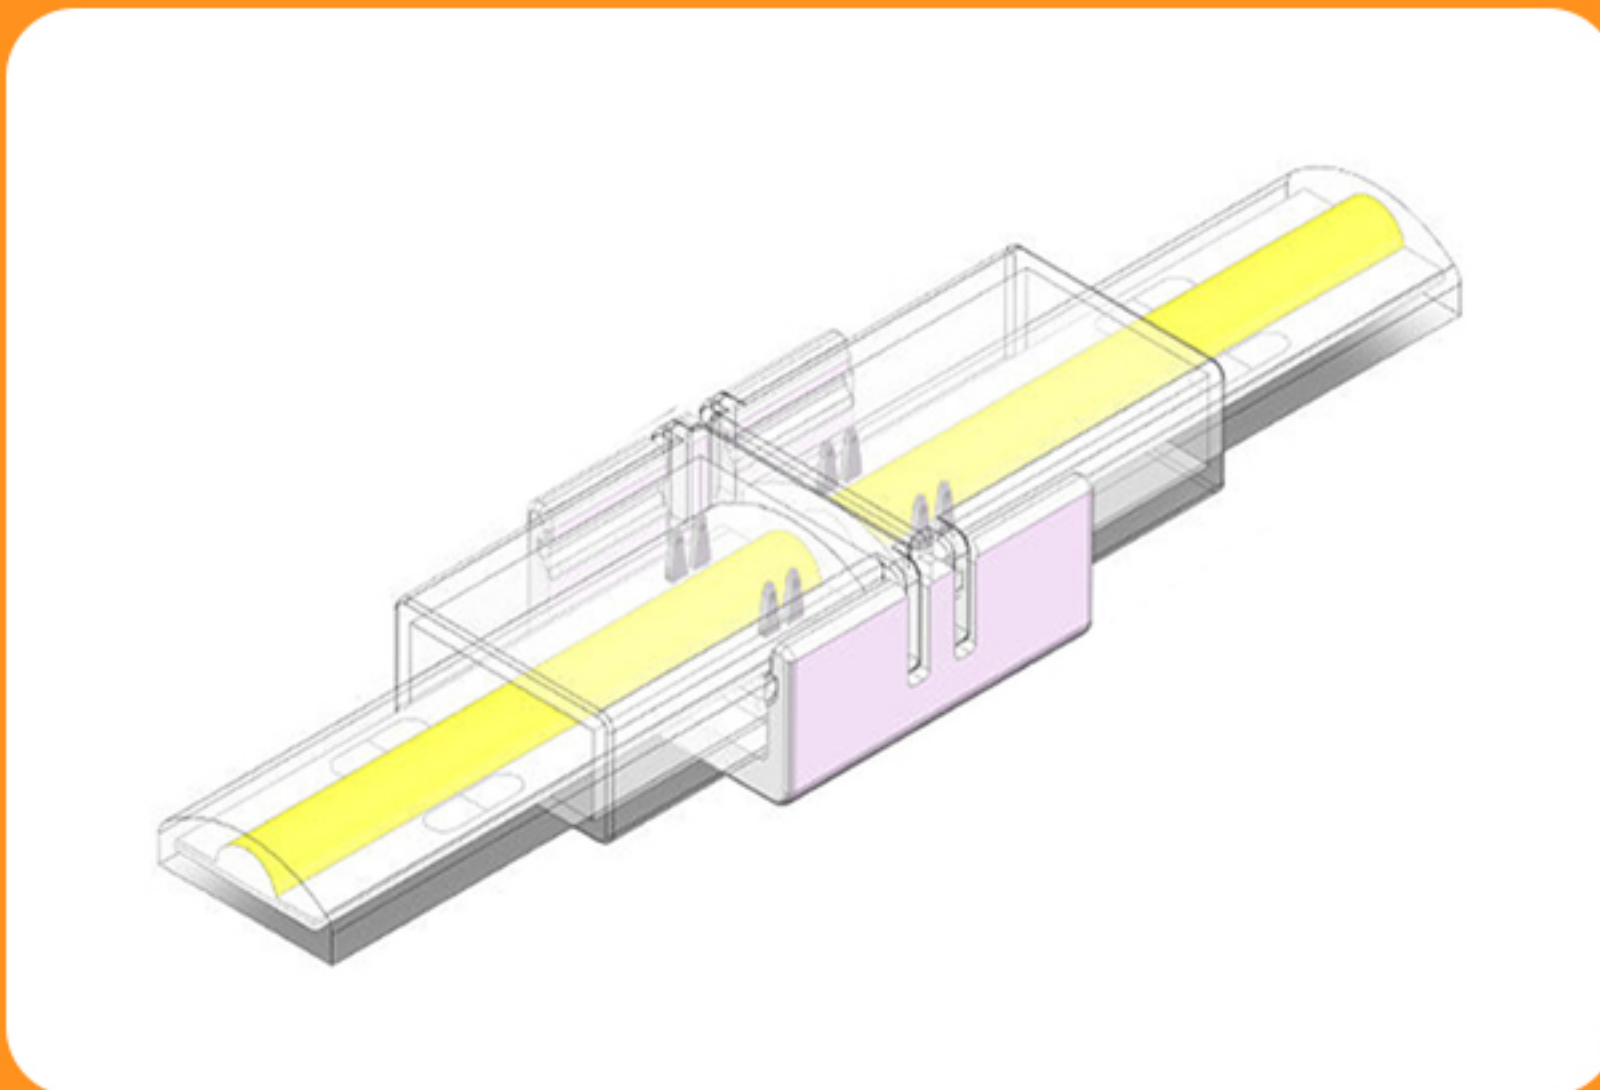

IP67/IP68 CONNECTOR



STANDARD CONNECTOR

COB LED Connector

4in1/9in1 Connector




GL-SC-2PIN-8MM-Z

Available PCB size: 8mm
Pins: 2 Pin
Rated current: AWG20 6A Max,
AWG22 4A Max
Rated voltage: 5V/9V/12V/18V/
24V/36V/48V
Voltage resistance: 500V
Temperature resistance: 85 °C
Working temperature:
-20 °C~+85 °C



GL-SC-2PIN-10MM-Z

Available PCB size: 10mm
Pins: 2 Pin
Rated current: AWG20 6A
Max, AWG22 4A Max
Rated voltage: 5V/9V/12V/18V/
24V/36V/48V
Voltage resistance: 500V
Temperature resistance: 85 °C
Working temperature:
-20 °C~+85 °C

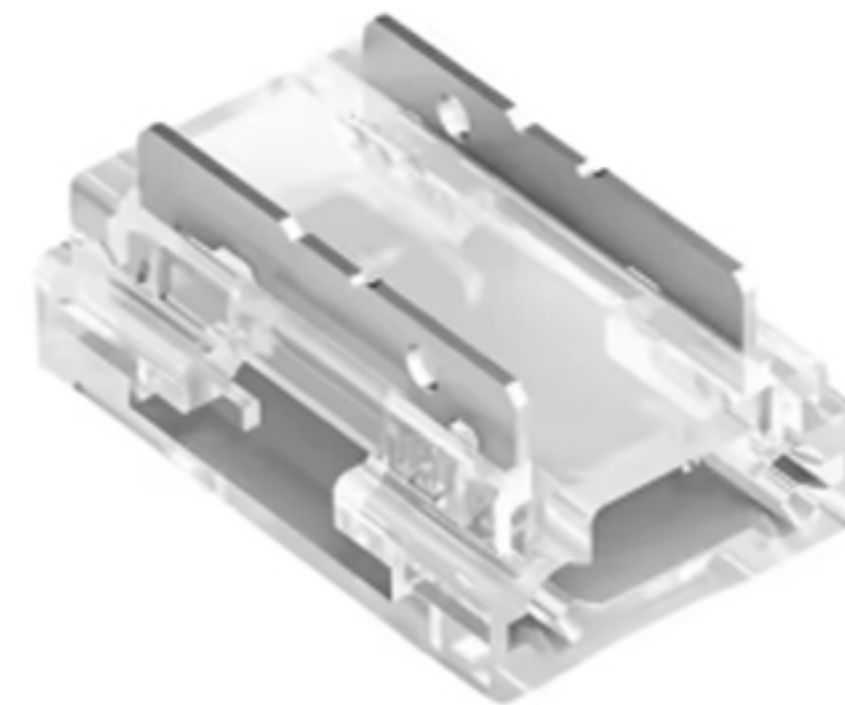


GL-5MMBMLT-2

Available PCB size: 5mm
Pins: 2 Pin
Typically Application: 2P COB
IP20 NON WATERPROOF
flexible led strip



GL-8MMBMLT-2

Available PCB size: 8mm
Pins: 2 Pin
Typically Application: COB
IP20 NON WATERPROOF
flexible led strip

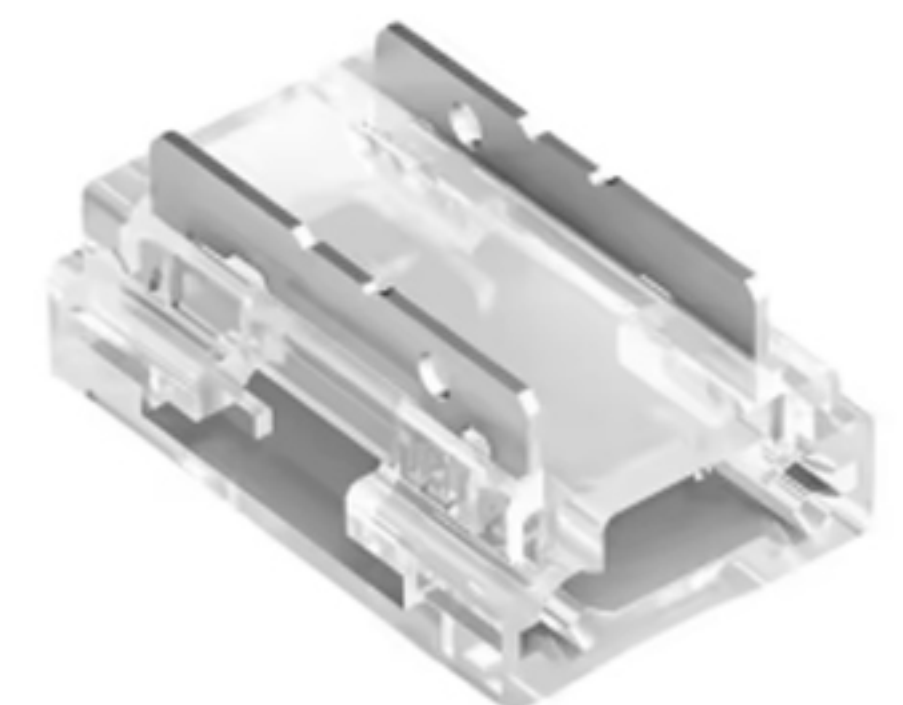


GL-10MMBMLT-2

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: COB IP20
NON WATERPROOF
flexible led strip


COB LED Connector

IP67/IP68 Connector

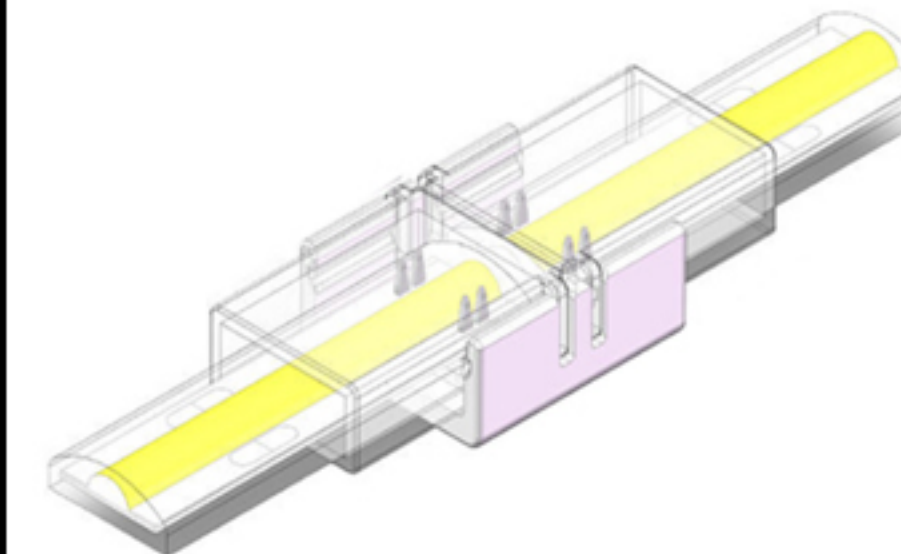


GL-8MMBB-2RW-C

Available PCB size: 8mm
Pins: 2 Pin
Typically Application: 2P COB
IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

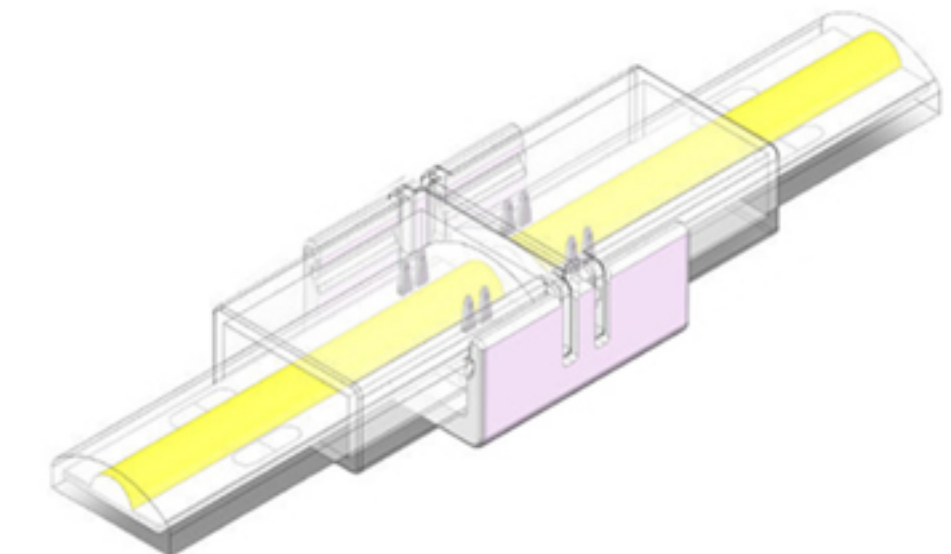


GL-10MMBB-2RW-C

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 2P COB
IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

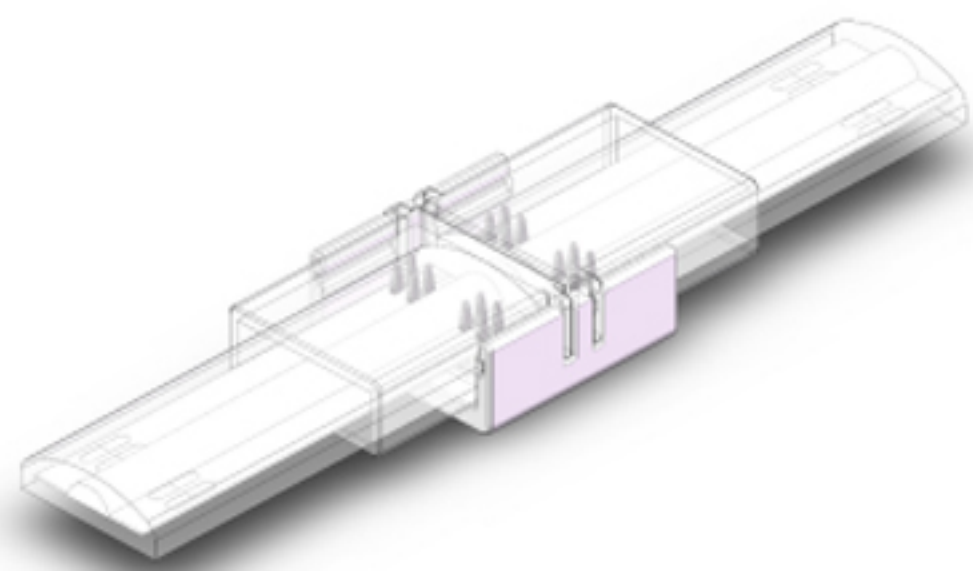


GL-10MMBB-3/4RW-C

Available PCB size: 10mm
Pins: 3Pin&4Pin
(Dual Color&RGB)
Typically Application: 3P&4P
COB IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

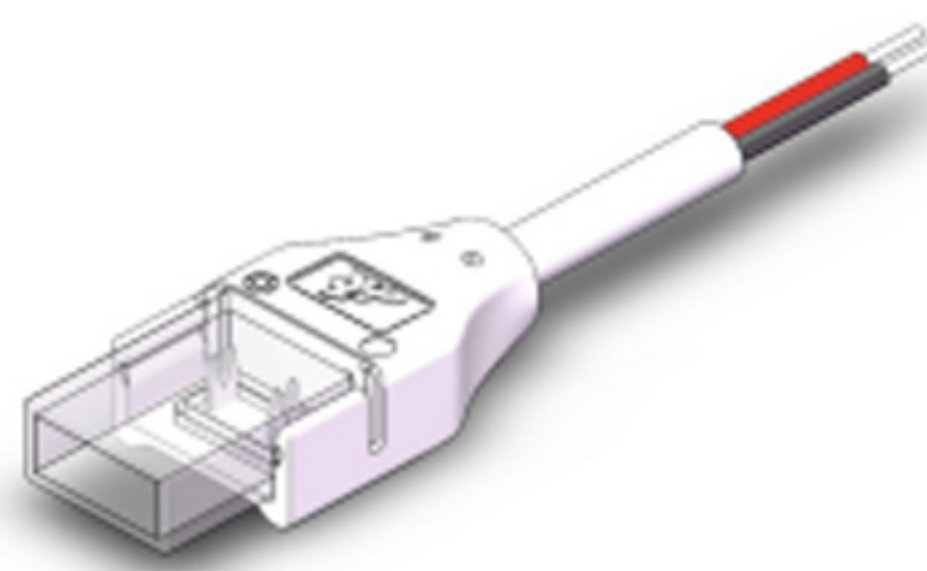


GL-8MMBX-2RW-C

Available PCB size: 8mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm in Length
Typically Application: 2P COB
IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

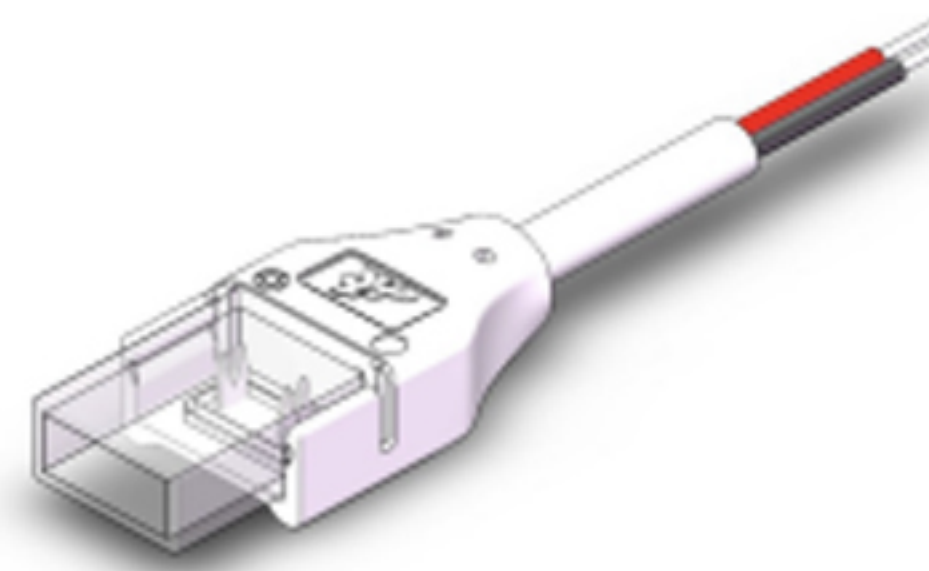


GL-10MMBX-2RW-C

Available PCB size: 10mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm in Length
Typically Application: 2P COB
IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

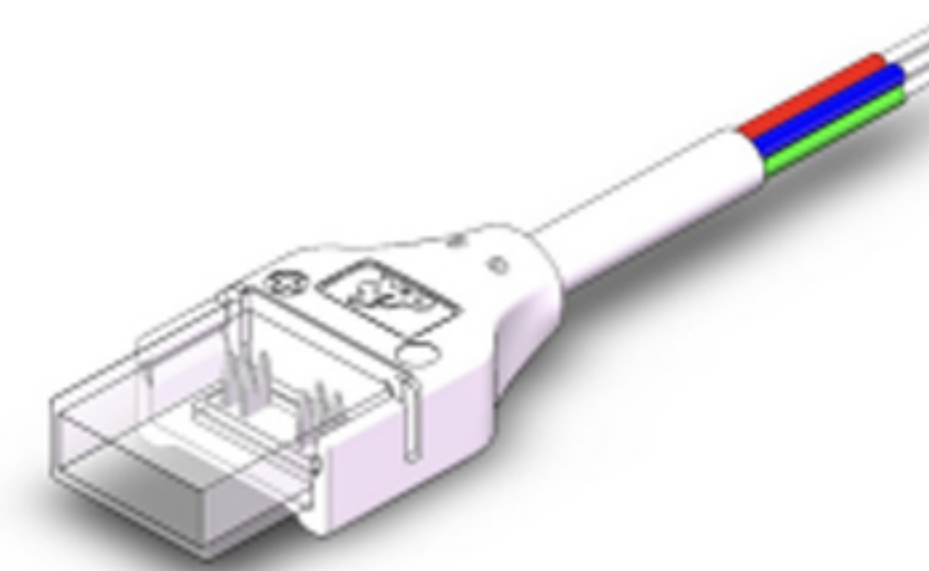

GL-10MMBX-3/4RW-C

Available PCB size: 10mm
Pins: 3Pin&4Pin (Dual Color&RGB)
Cable: 22#(0.34mm²), 15cm in Length
Typically Application: 3P&4P
COB IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

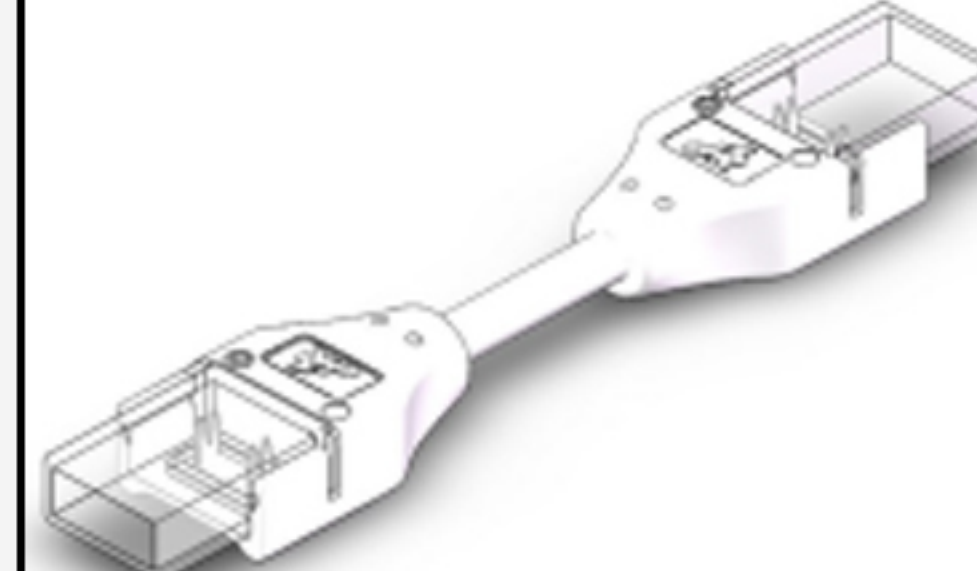


GL-8MMBXB-2RW-C

Available PCB size: 8mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm in Length
Typically Application: 2P COB
IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

COB LED


Connector

IP67/IP68 Connector

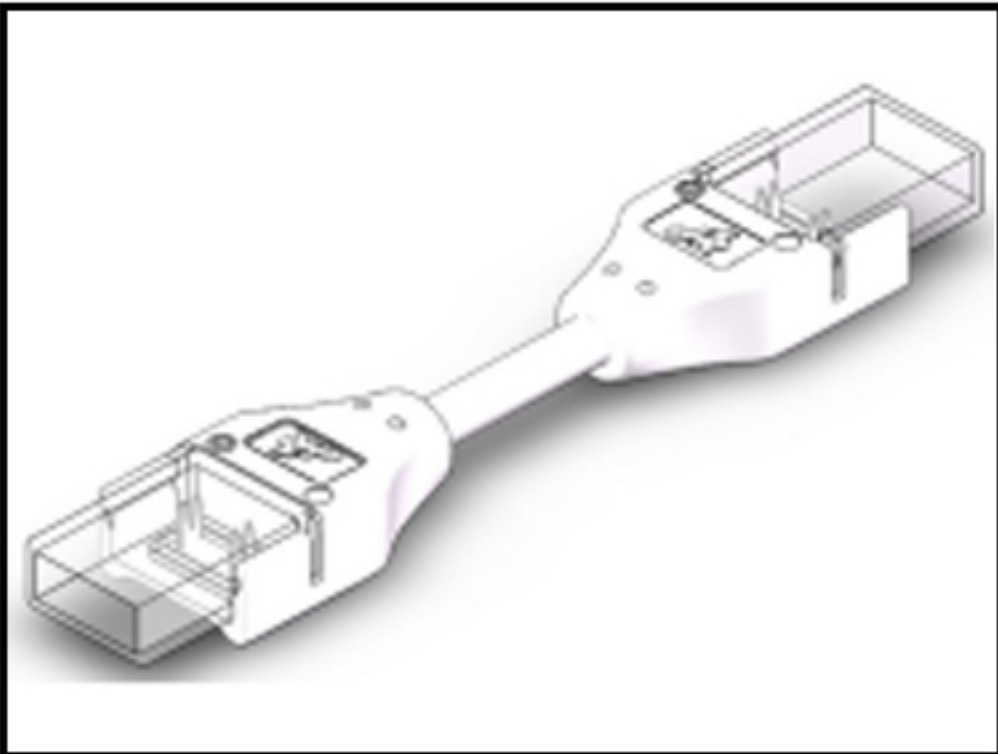









GL-10MMBxB-2RW-C

Available PCB size: 10mm
Pins: 2 Pin
Cable: 20#(0.5mm^2), 15cm in Length
Typically Application: 2P COB IP67 IP68 SILICON TUBE WATERPROOF flexible led strip

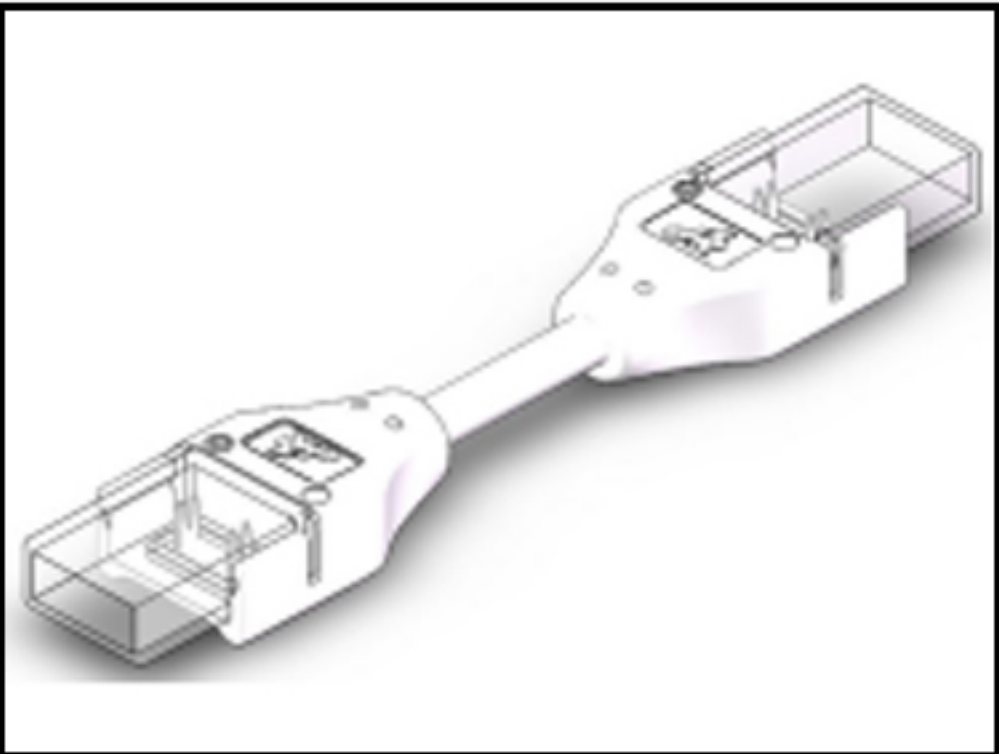

GL-10MMBxB-3/4RW-C

Available PCB size: 10mm
Pins: 3Pin&4Pin (Dual Color&RGB)
Cable: 22#(0.34mm^2), 15cm in Length
Typically Application: 3P&4P COB IP67 IP68 SILICON TUBE WATERPROOF flexible led strip



COB LED Connector


Standard LED Connector

1 - Strip to wire to strip



GL-5MMBXB-2C

Available PCB size:
4mm/4.5mm/5mm
Pins: 2 Pin
Typically Application:
4mm/4.5mm/5mm width
IP20 COB strip
Wire length 10cm

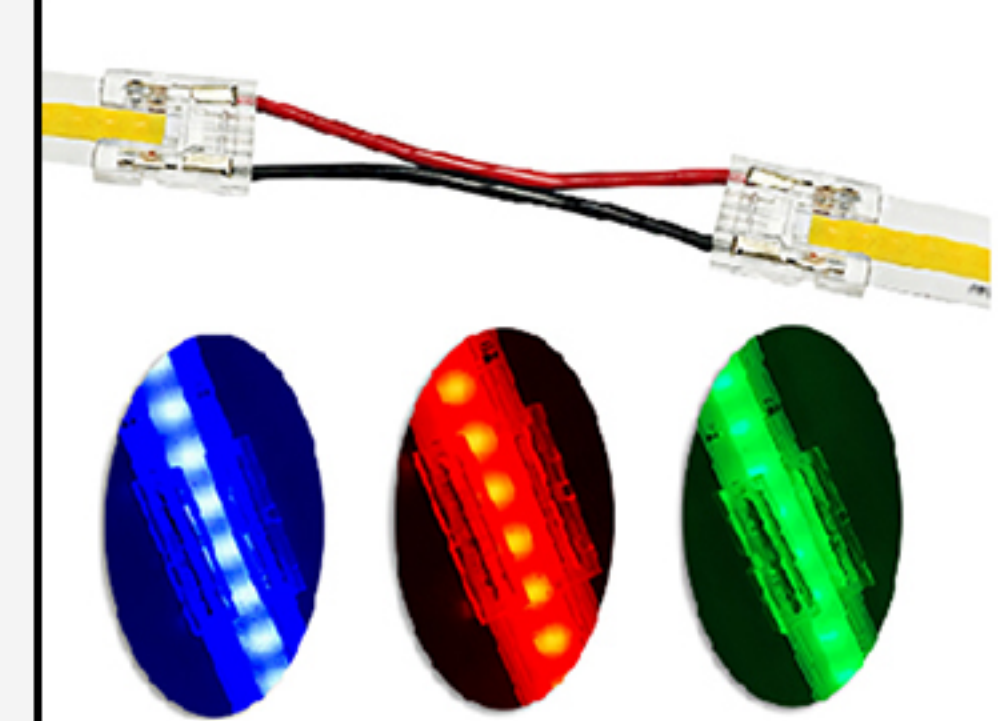


GL-8MMBXB-2C

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
IP20 COB strip
Wire length 10cm




GL-10MMBXB-3C

Available PCB size: 10mm
Pins: 3 Pin
Typically Application:
10mm width
IP20 COB strip
Wire length 10cm

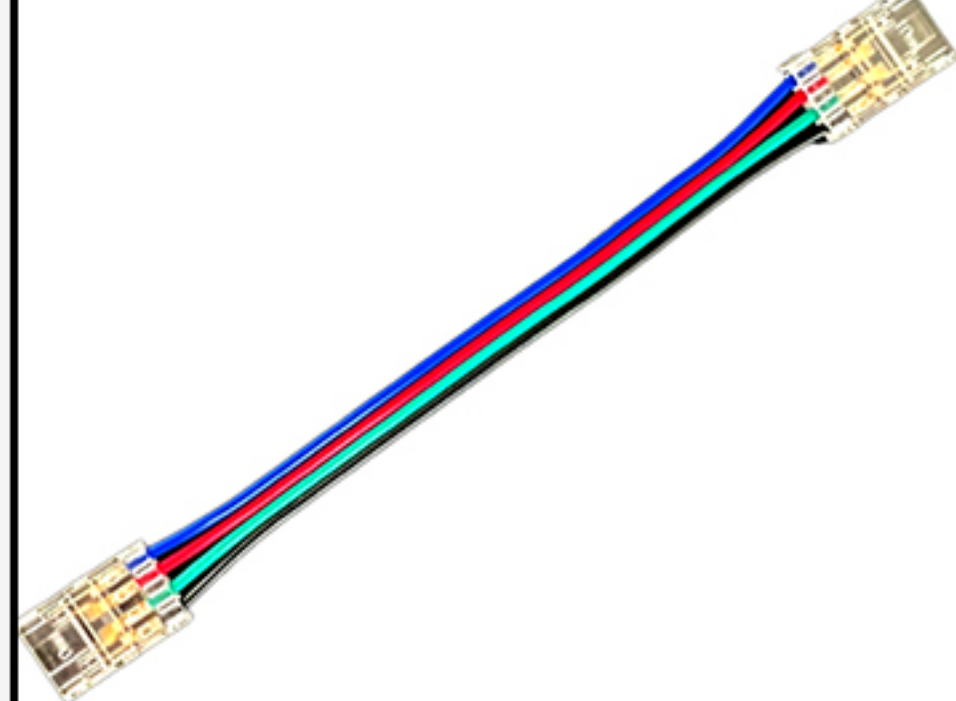


GL-10MMBXB-4C

Available PCB size: 10mm
Pins: 4 Pin
Typically Application:
10mm width
IP20 COB strip
No dark areas at the
cob strip connections

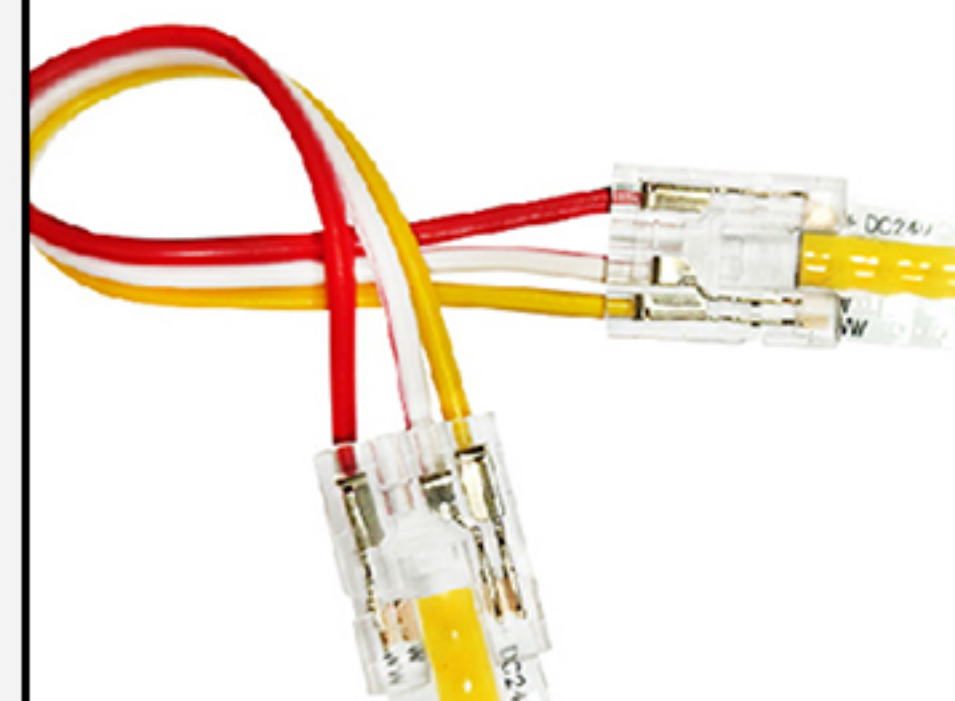

GL-8MMBXB-3C

Available PCB size: 8mm
Pins: 3 Pin
Typically Application:
8mm width
IP20 COB strip
Wire length 10cm

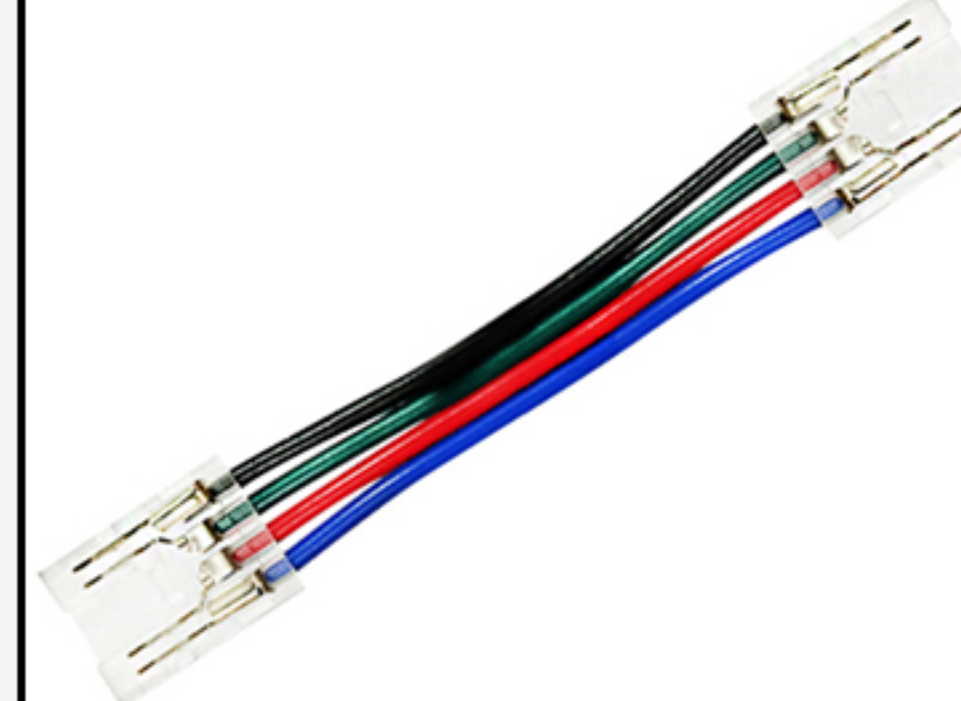

GL-8MMBXB-4C

Available PCB size: 8mm
Pins: 4 Pin
Typically Application:
8mm width
IP20 COB strip
Wire length 10cm




GL-10MMBXB-2C

Available PCB size: 10mm
Pins: 2 Pin
Typically Application:
10mm width
IP20 COB strip
Wire length 10cm

COB LED Connector

Standard LED Connector

2 - Strip to strip

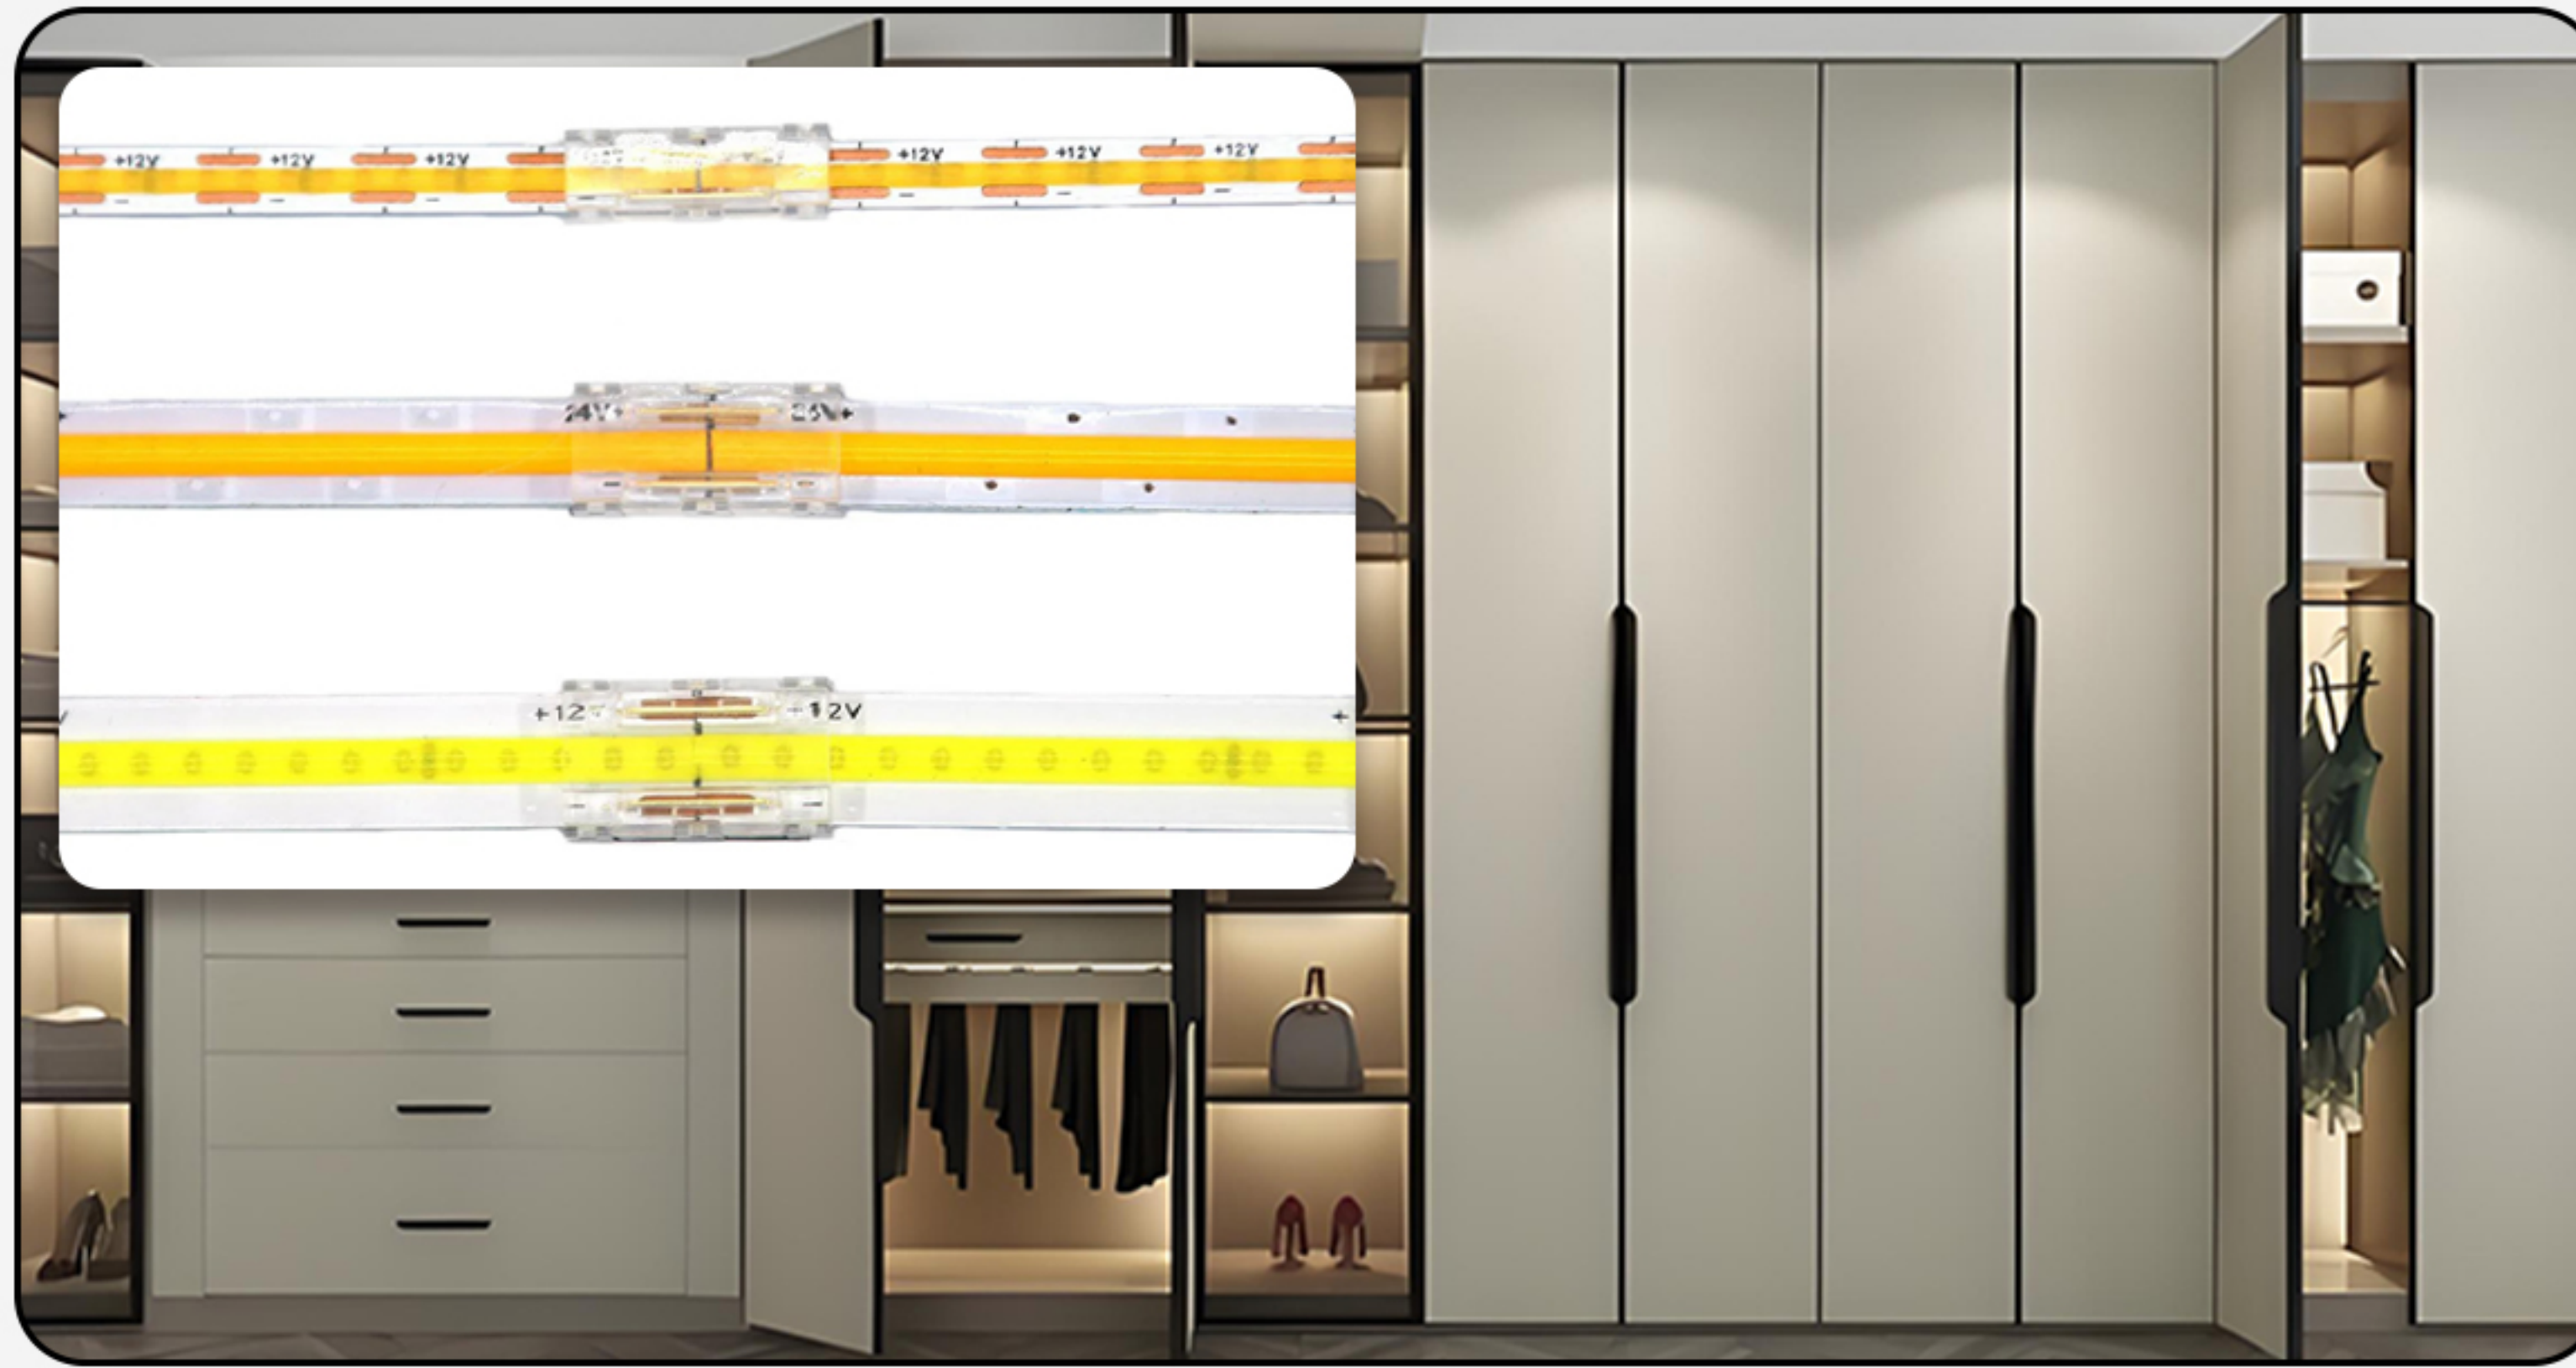


GL-5MMBB-2C

Available PCB size:
4mm/4.5mm/5mm
Pins: 2 Pin
Typically Application:
4mm/4.5mm/5mm width
IP20 COB strip
No dark areas at the
cob strip connections



GL-8MMBB-2C

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
IP20 COB strip
No dark areas at the
cob strip connections

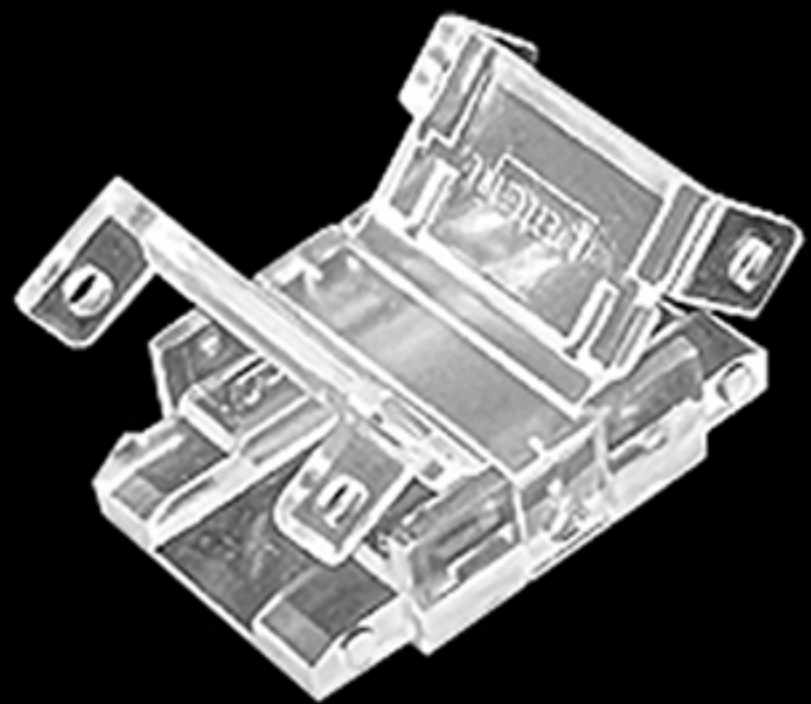

GL-10MMBB-2C

Available PCB size: 10mm
Pins: 2 Pin
Typically Application:
10mm width
IP20 COB strip
No dark areas at the
cob strip connections



GL-8MMBB-3C

Available PCB size: 8mm
Pins: 3 Pin
Typically Application:
8mm width
IP20 COB strip
No dark areas at the
cob strip connections




GL-10MMBB-3C

Available PCB size: 10mm
Pins: 3 Pin
Typically Application:
10mm width
IP20 COB strip
No dark areas at the
cob strip connections



GL-8MMBB-4C

Available PCB size: 8mm
Pins: 4 Pin
Typically Application:
8mm width
IP20 COB strip
No dark areas at the
cob strip connections

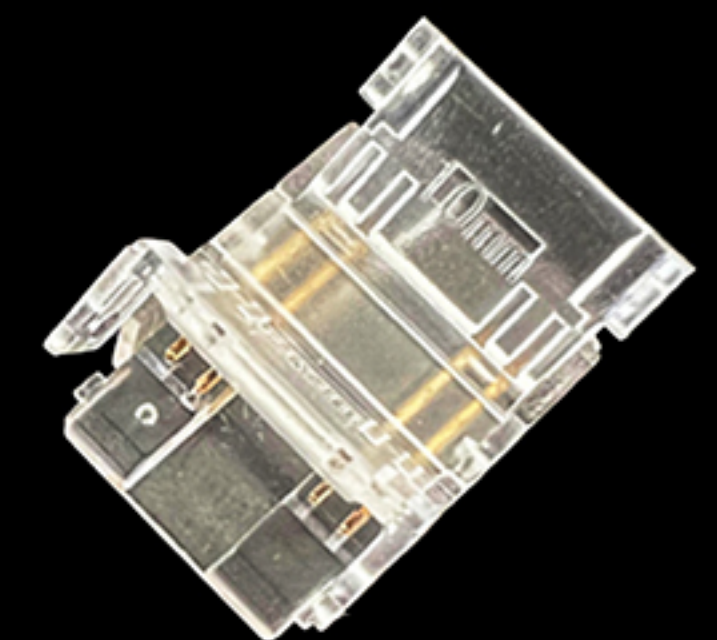


GL-10MMBB-4C

Available PCB size: 10mm
Pins: 4 Pin
Typically Application:
10mm width
IP20 COB strip
No dark areas at the
cob strip connections

COB LED Connector


Standard LED Connector

3 - Strip to wire

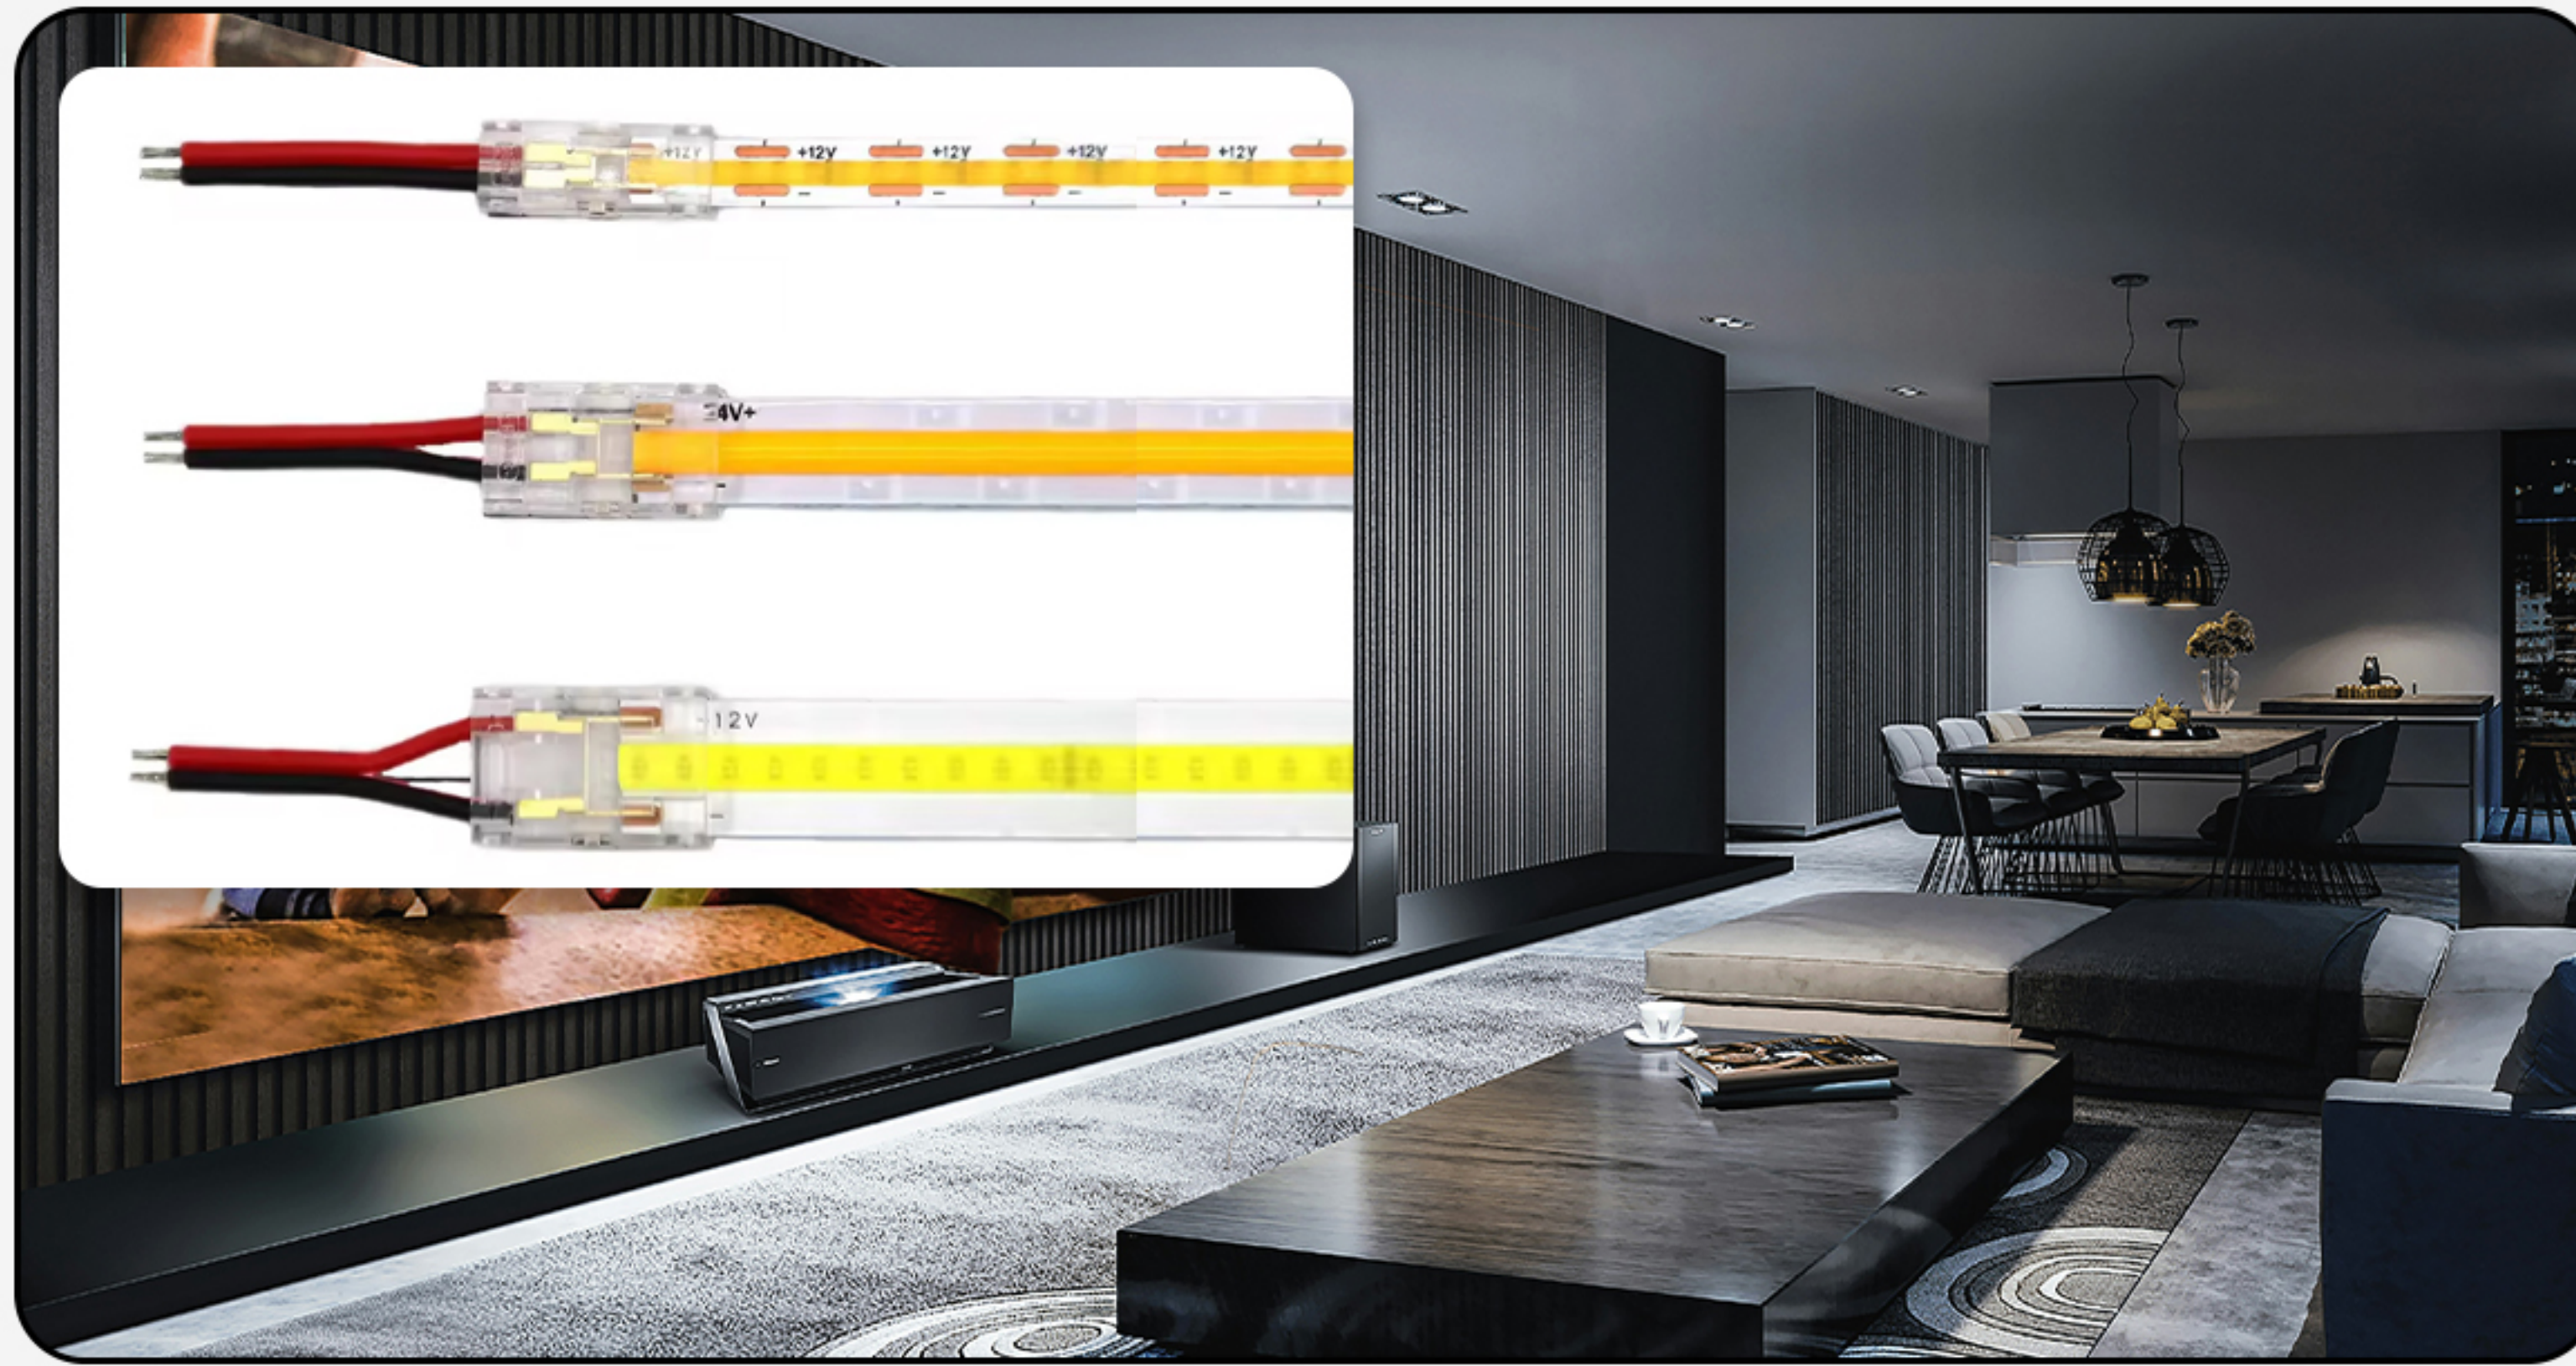

GL-8MMBX1-2C

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
IP20 COB strip
Wire length 10cm

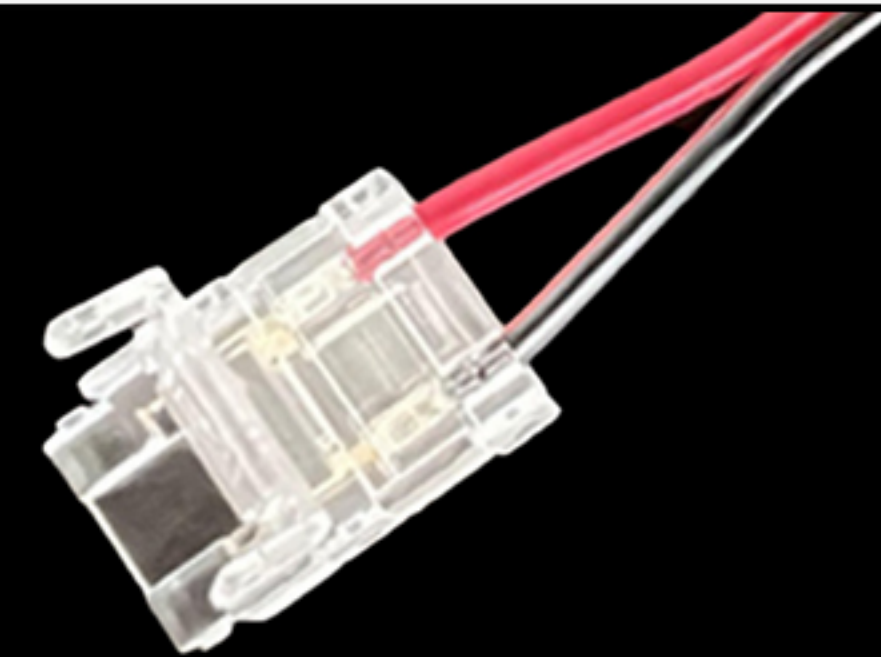

GL-10MMBX1-2C

Available PCB size: 10mm
Pins: 2 Pin
Typically Application:
10mm width
IP20 COB strip
Wire length 10cm



GL-5MMBX1-2C

Available PCB size:
4mm/4.5mm/5mm
Pins: 2 Pin
Typically Application:
4mm/4.5mm/5mm width
IP20 COB strip
Wire length 10cm




GL-8MMBX1-3C

Available PCB size: 8mm
Pins: 3 Pin
Typically Application:
8mm width
IP20 COB strip
Wire length 10cm




GL-10MMBX1-3C

Available PCB size: 10mm
Pins: 3 Pin
Typically Application:
10mm width
IP20 COB strip
Wire length 10cm

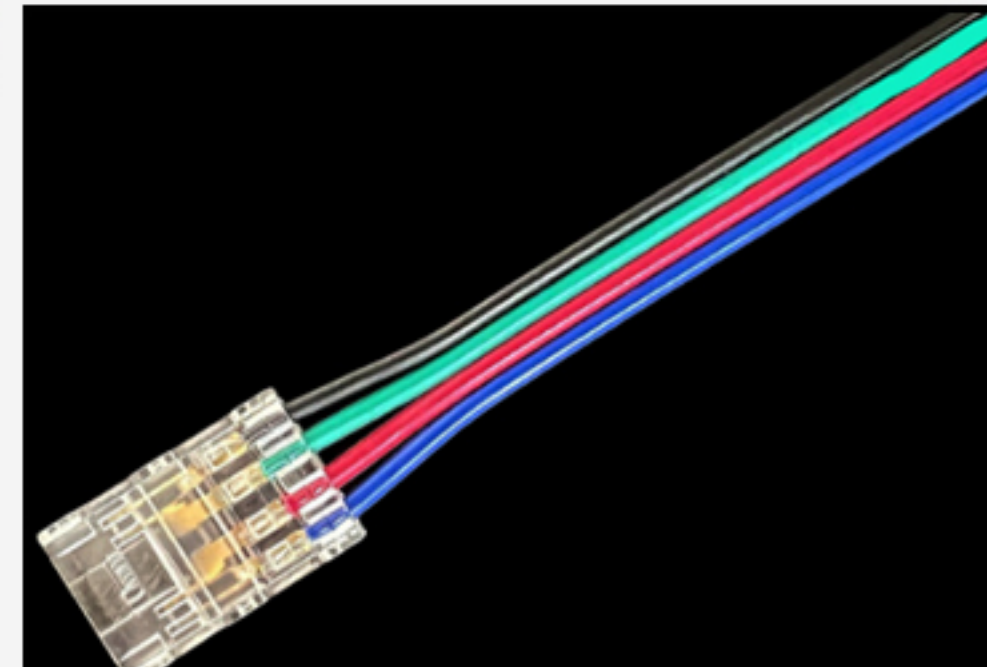

GL-10MMBX1-4C

Available PCB size: 8mm
Pins: 4 Pin
Typically Application:
8mm width
IP20 COB strip
Wire length 10cm

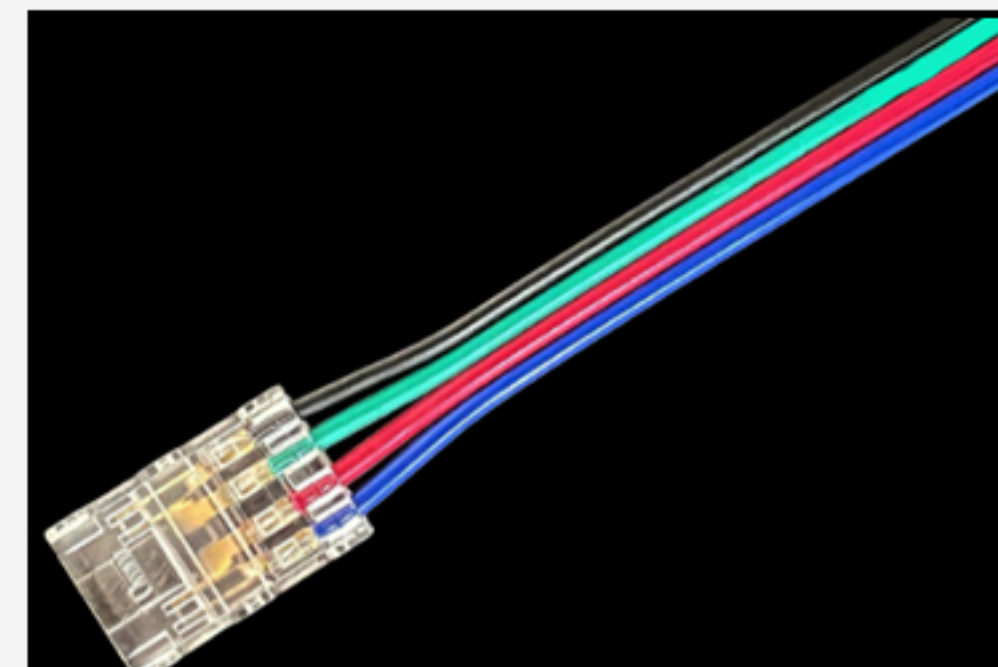


GL-10MMBX1-4C

Available PCB size: 10mm
Pins: 4 Pin
Typically Application:
10mm width
IP20 COB strip
Wire length 10cm

COB LED Connector


Standard LED Connector

4 - Strip to wire (without wire)

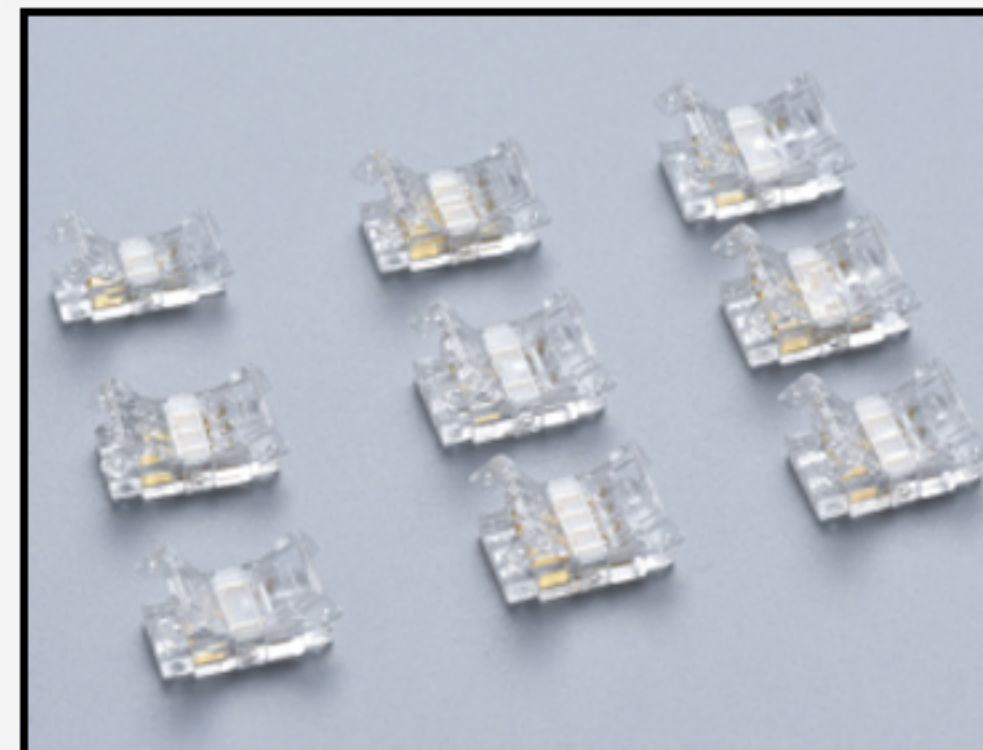


GL-5MMBX-2C

Available PCB size:
4mm/4.5mm/5mm
Pins: 2 Pin
Typically Application:
4mm/4.5mm/5mm width
IP20 COB strip

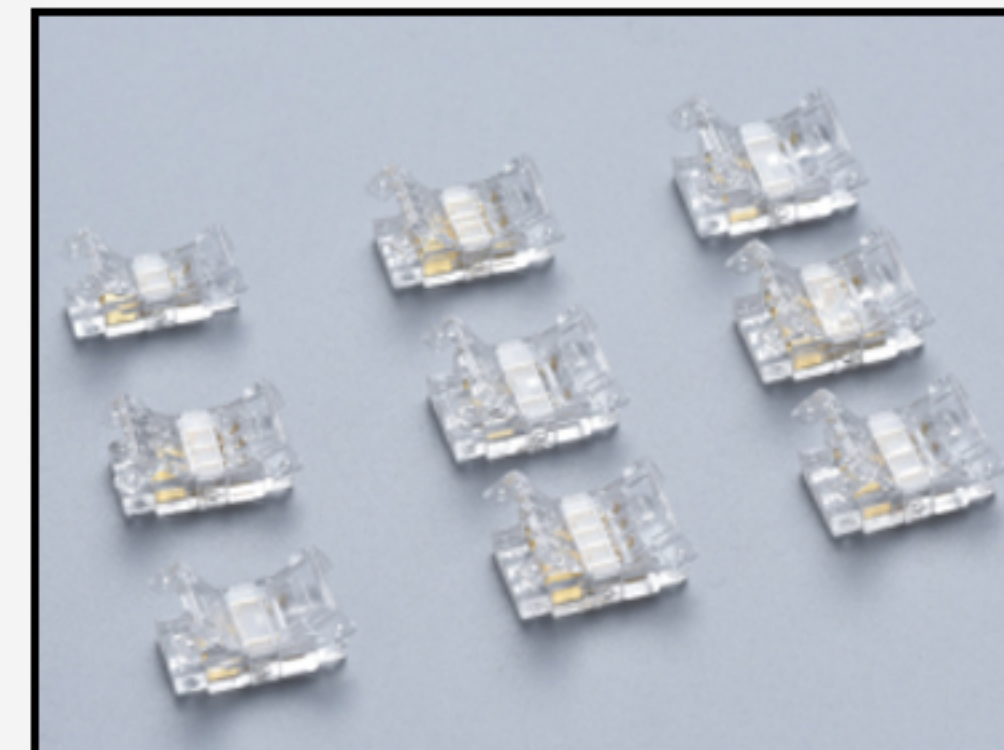


GL-8MMBX-2C

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
IP20 COB strip

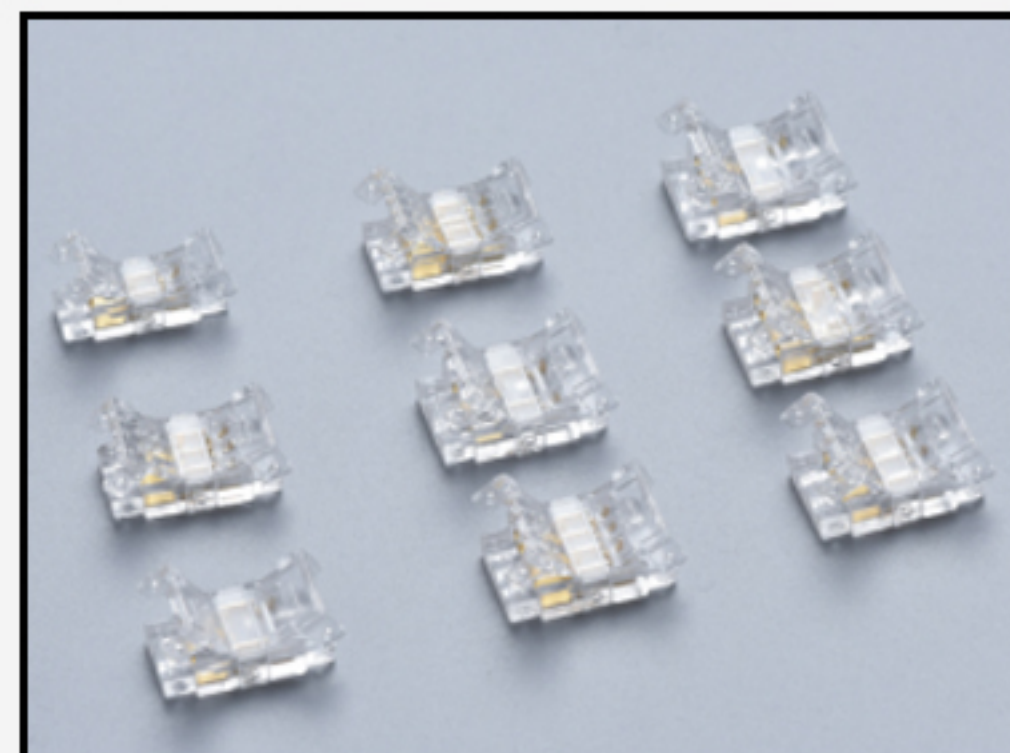


GL-8MMBX-3C

Available PCB size: 8mm
Pins: 3 Pin
Typically Application:
8mm width
IP20 COB strip

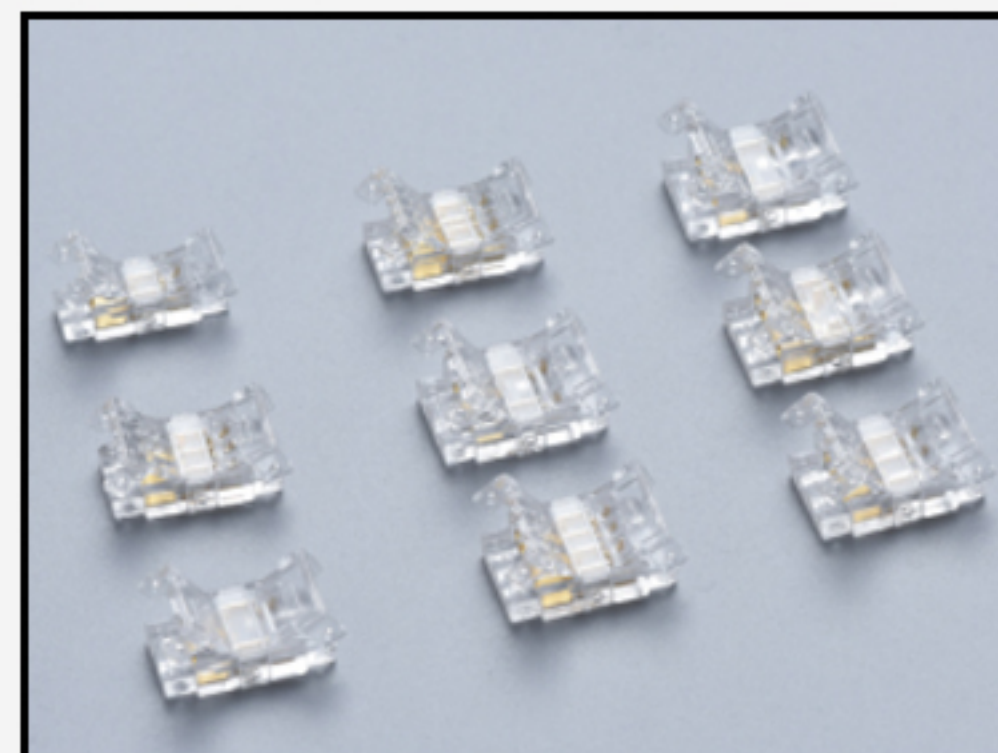


GL-8MMBX-4C

Available PCB size: 8mm
Pins: 4 Pin
Typically Application:
8mm width
IP20 COB strip

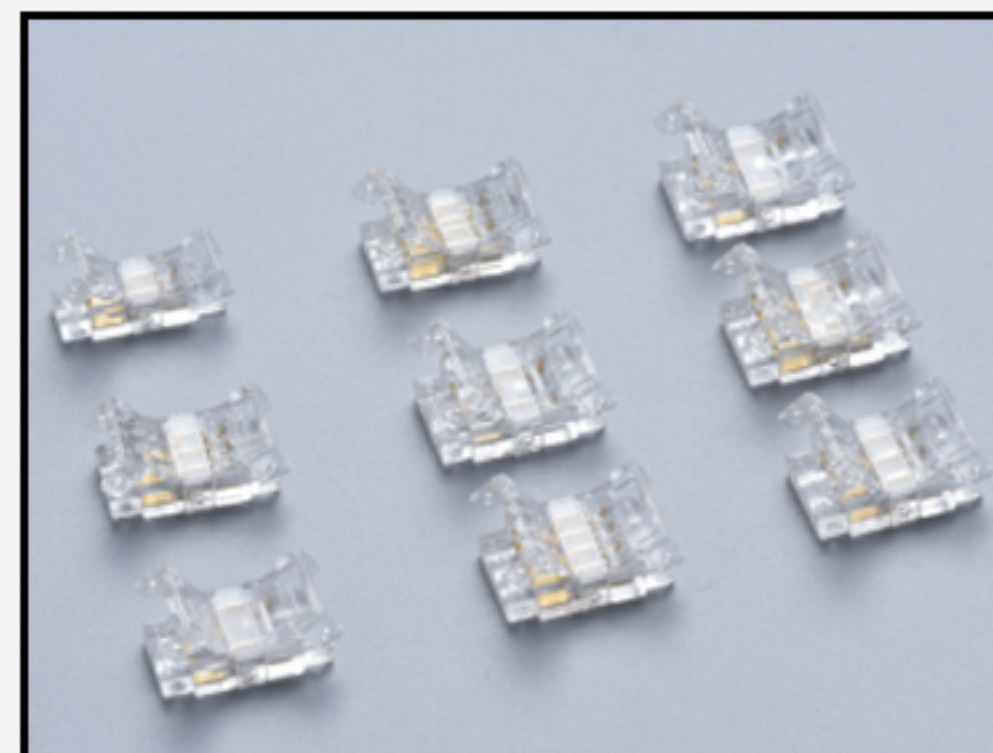


GL-10MMBX-2C

Available PCB size: 10mm
Pins: 2 Pin
Typically Application:
10mm width
IP20 COB strip

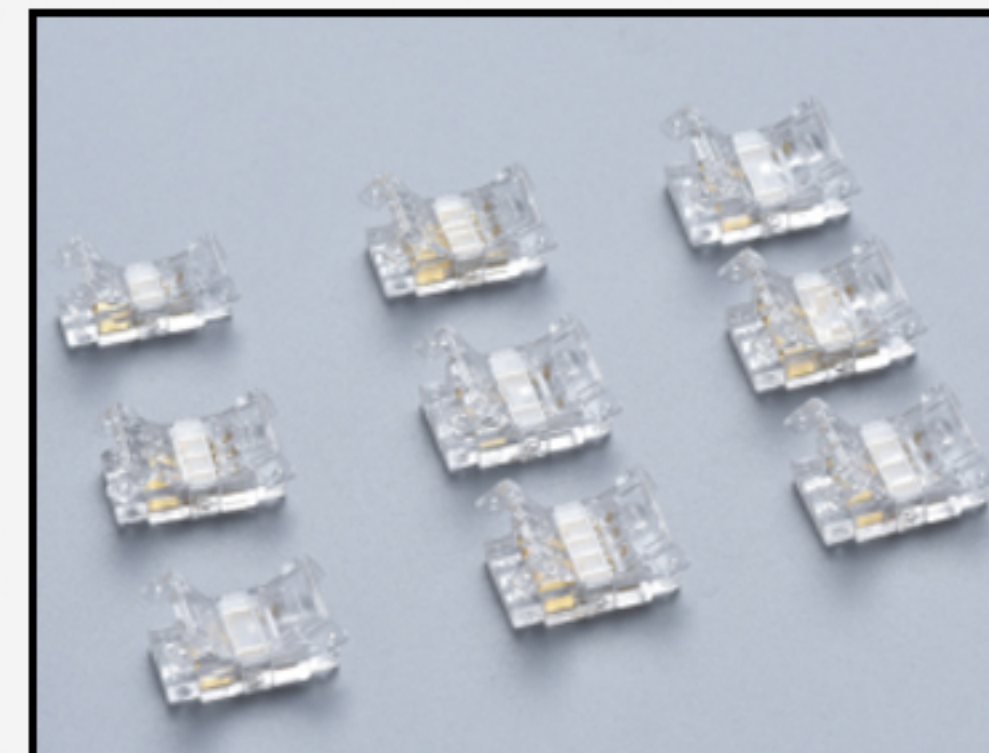

GL-10MMBX-3C

Available PCB size: 10mm
Pins: 3 Pin
Typically Application:
10mm width
IP20 COB strip

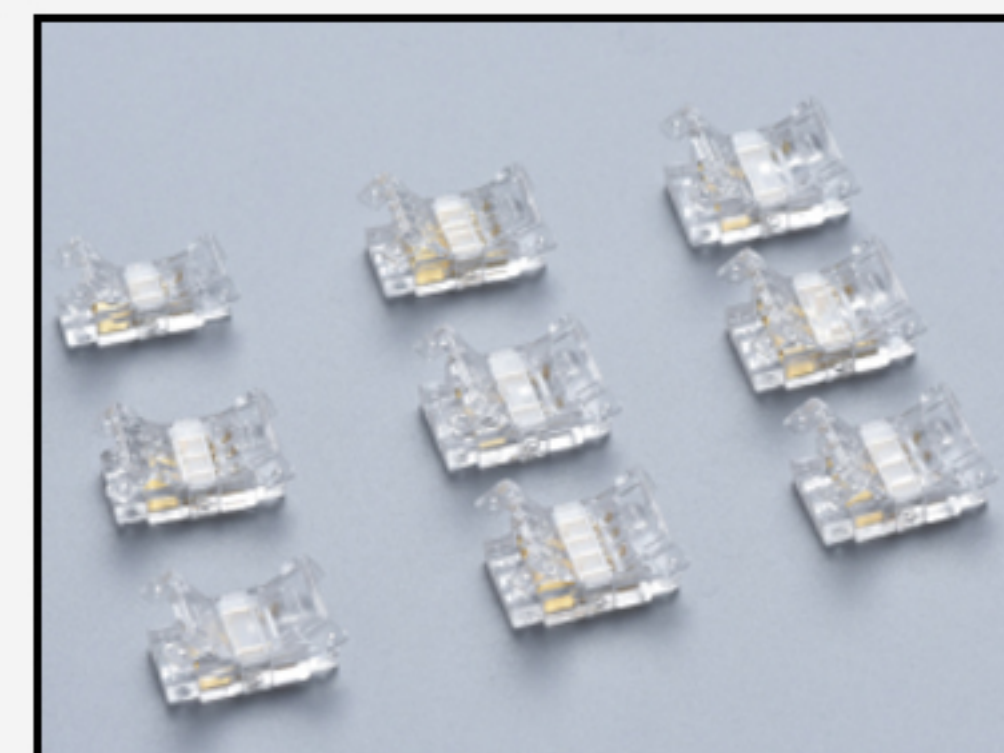

GL-10MMBX-4C

Available PCB size: 10mm
Pins: 4 Pin
Typically Application:
10mm width
IP20 COB strip

COB LED Connector


Standard LED Connector

5 - L/+ /T




GL-8MML-2C

Available PCB size: 8mm
Pins: 2 Pin
Typically Application: 8mm
IP20 COB strip

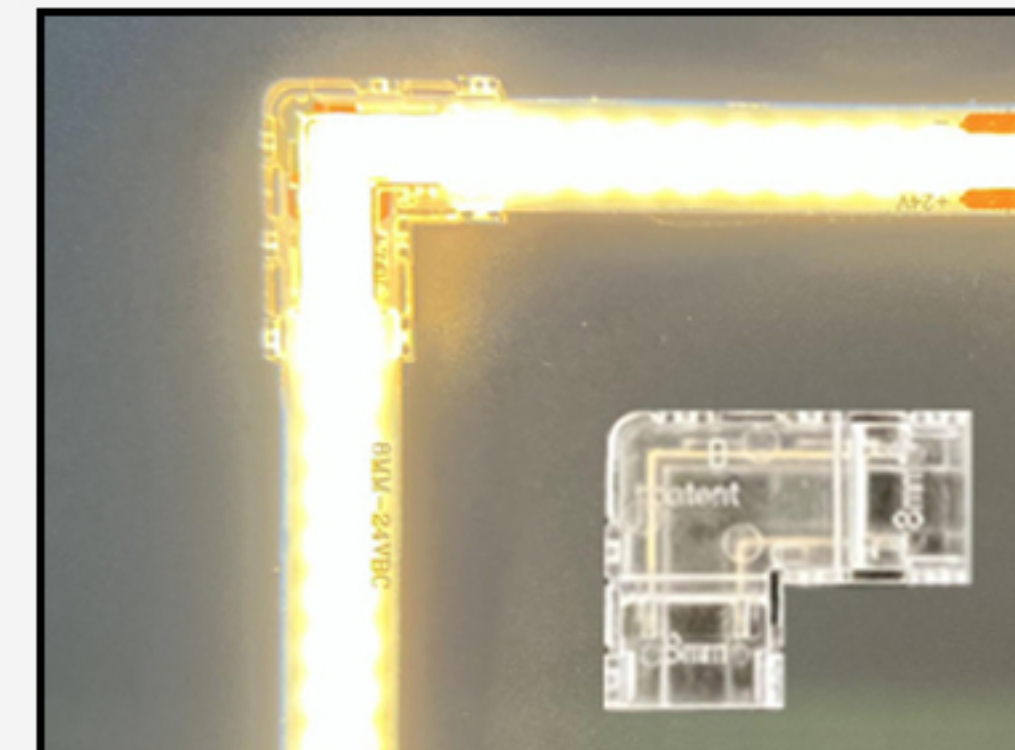


GL-10MML-2C

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
IP20 COB strip

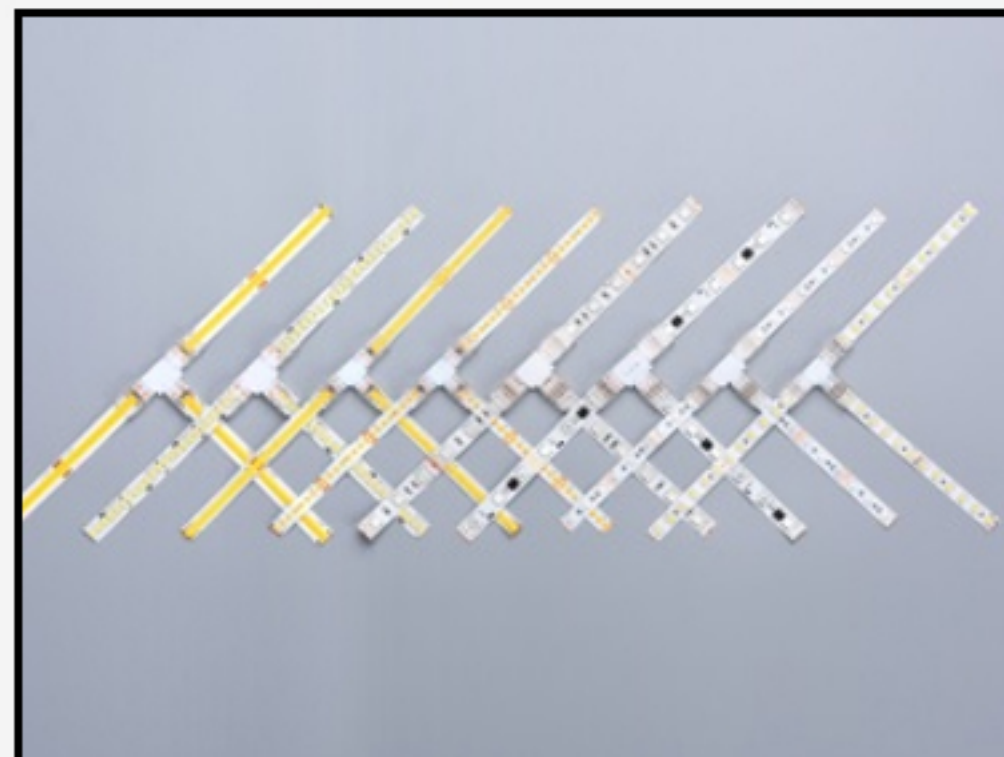


GL-8MMT-2C

Available PCB size: 8mm
Pins: 2 Pin
Typically Application: 8mm
IP20 COB strip

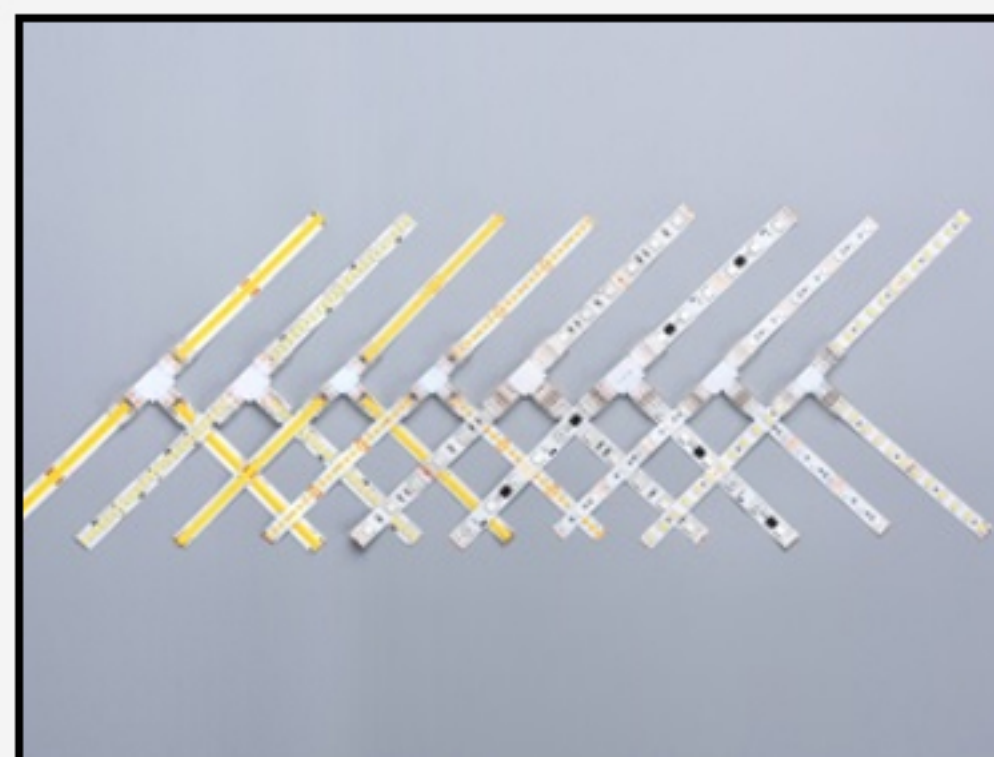


GL-10MMT-2C

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
IP20 COB strip

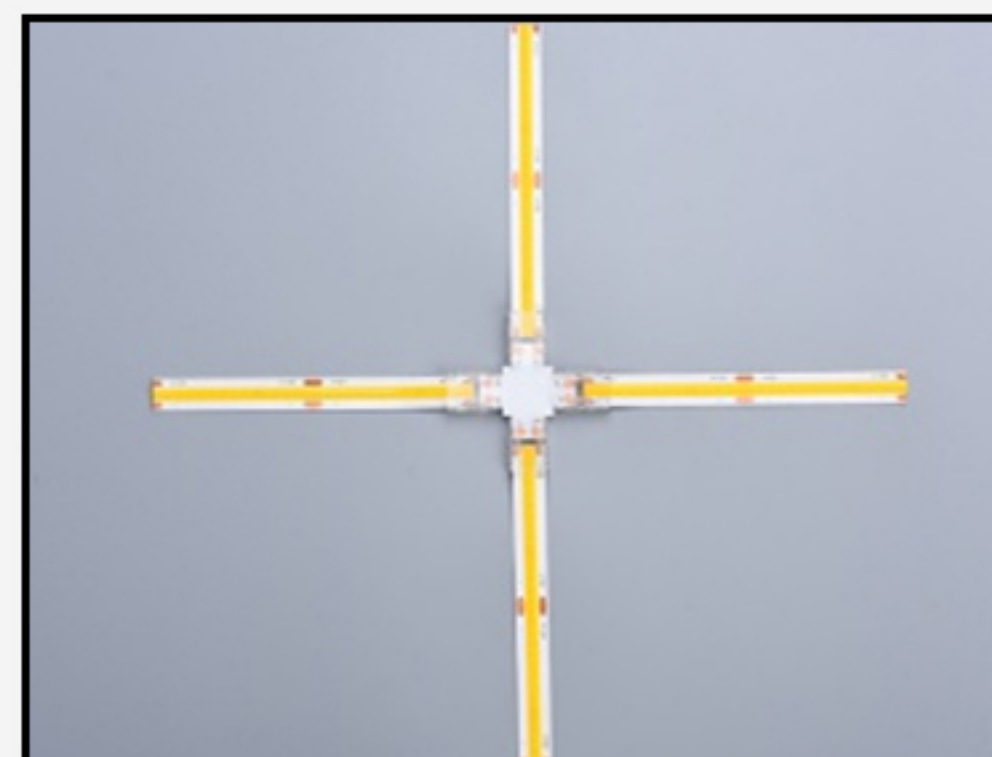

GL-8MM+-2C

Available PCB size: 8mm
Pins: 2 Pin
Typically Application: 8mm
IP20 COB strip

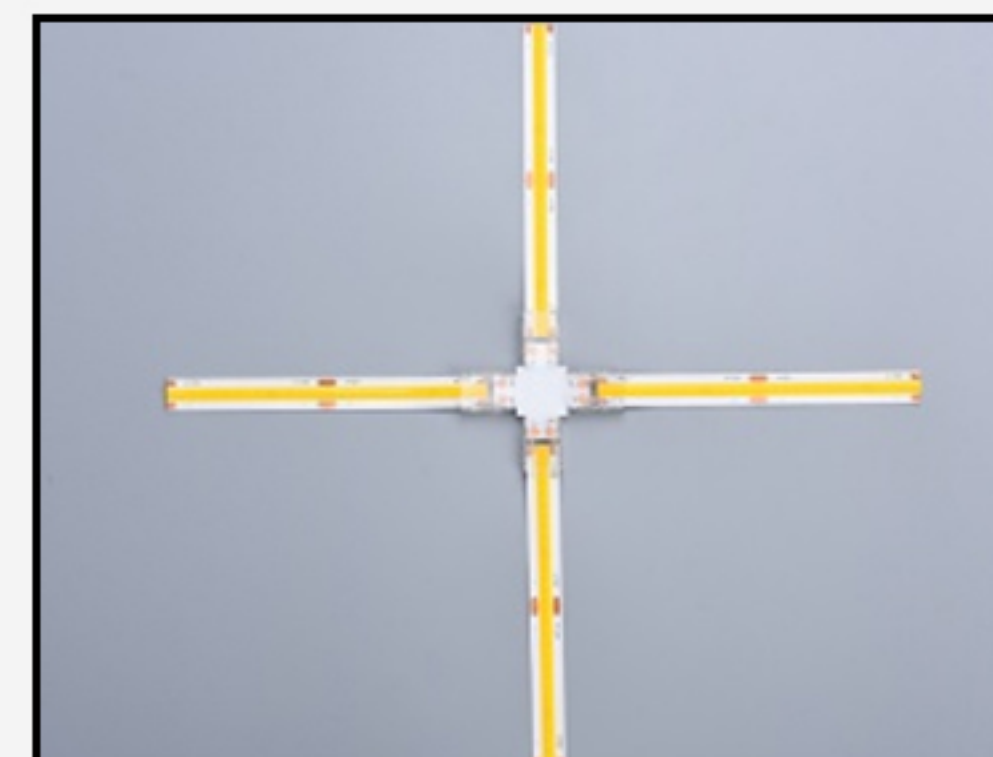

GL-10MM+-2C


Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
IP20 COB strip



COB LED Connector


Standard LED Connector

6 - Solid Lock

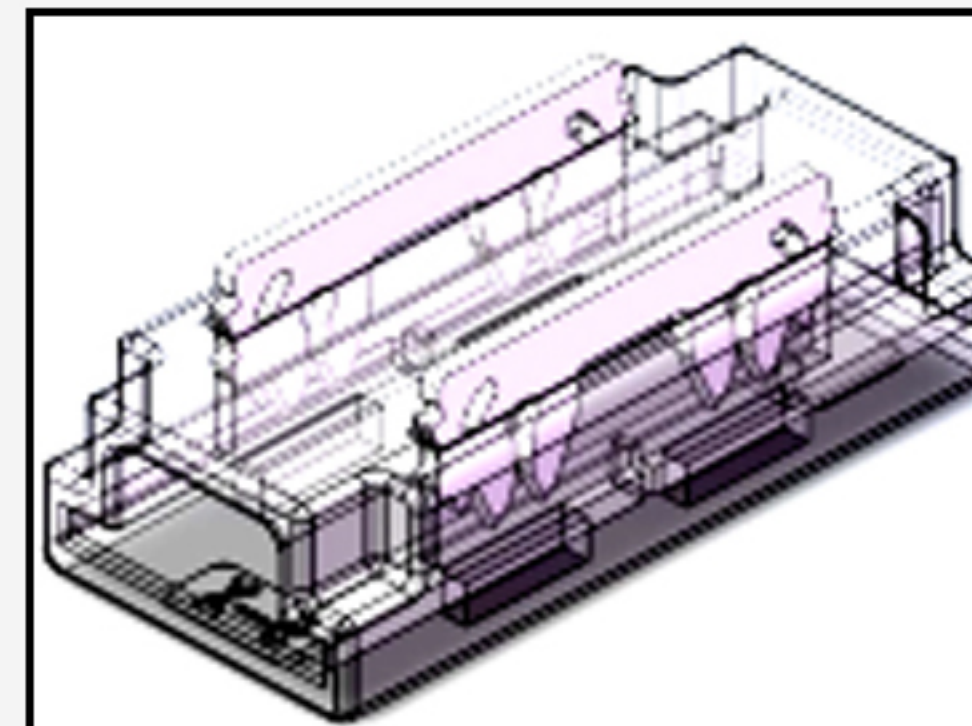


GL-5MMBB-2R-C

Available PCB size: 5mm
Pins: 2 Pin
Typically Application: 2P COB
IP20 NON WATERPROOF
flexible led strip

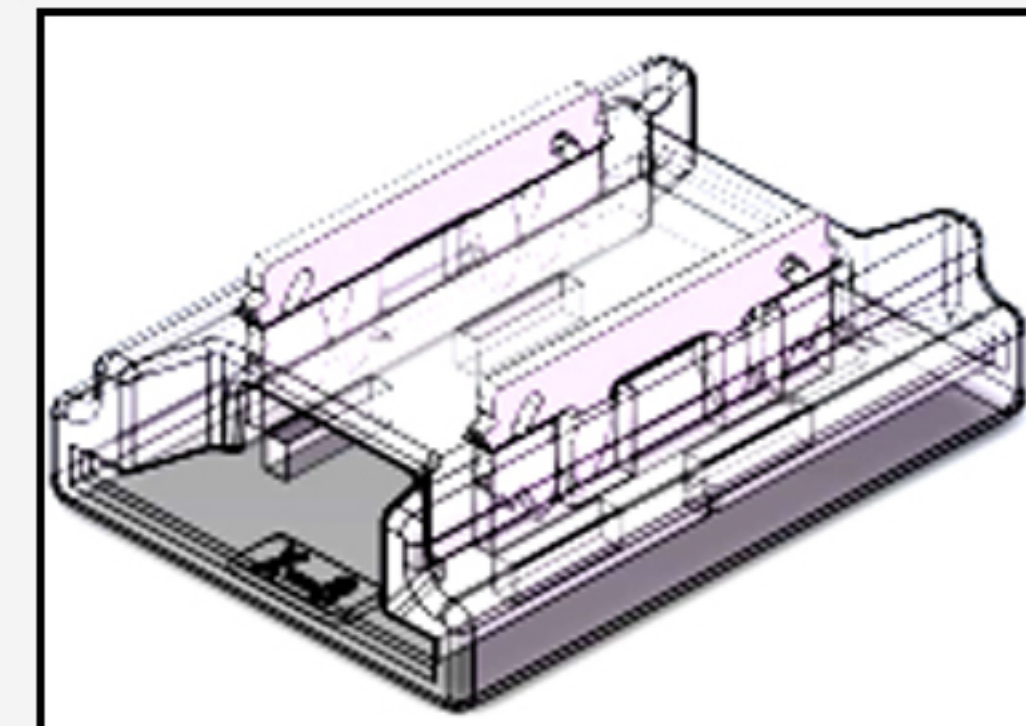


GL-8MMBB-2R-C

Available PCB size: 8mm
Pins: 2 Pin
Typically Application: 2P SMD
or COB IP20 NON
WATERPROOF flexible led strip

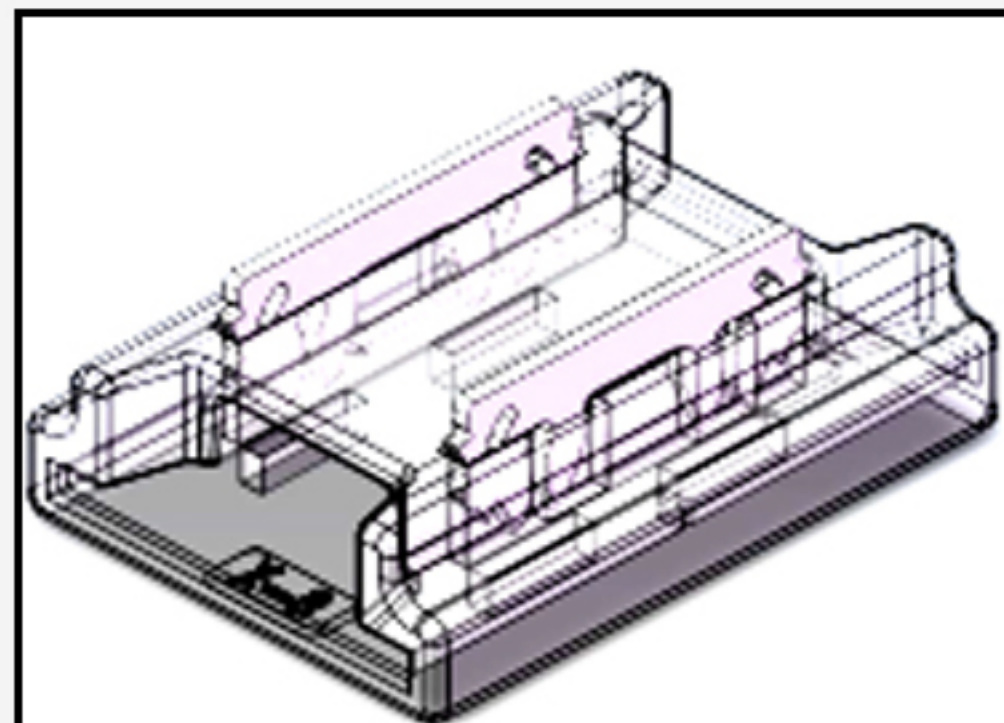


GL-10MMBB-2R-C

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 2P SMD
or COB IP20 NON WATERPROOF
flexible led strip

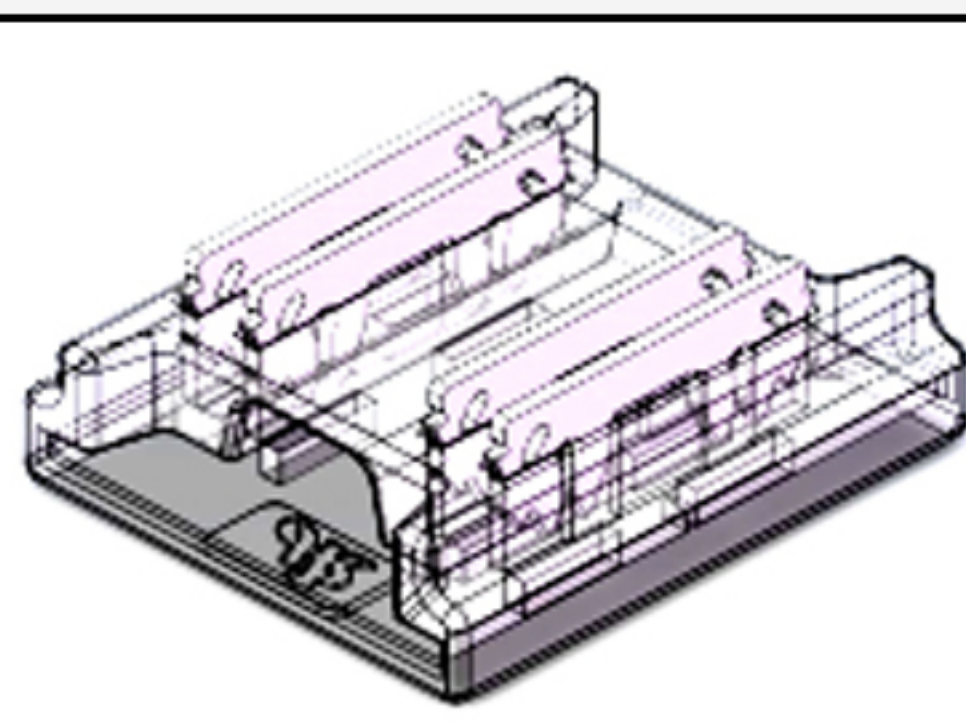


GL-10MMBB-3/4R-C

Available PCB size: 10mm
Pins: 3Pin&4Pin
(Dual Color&RGB)
Typically Application:
3P&4P COB IP20 NON
WATERPROOF flexible led strip

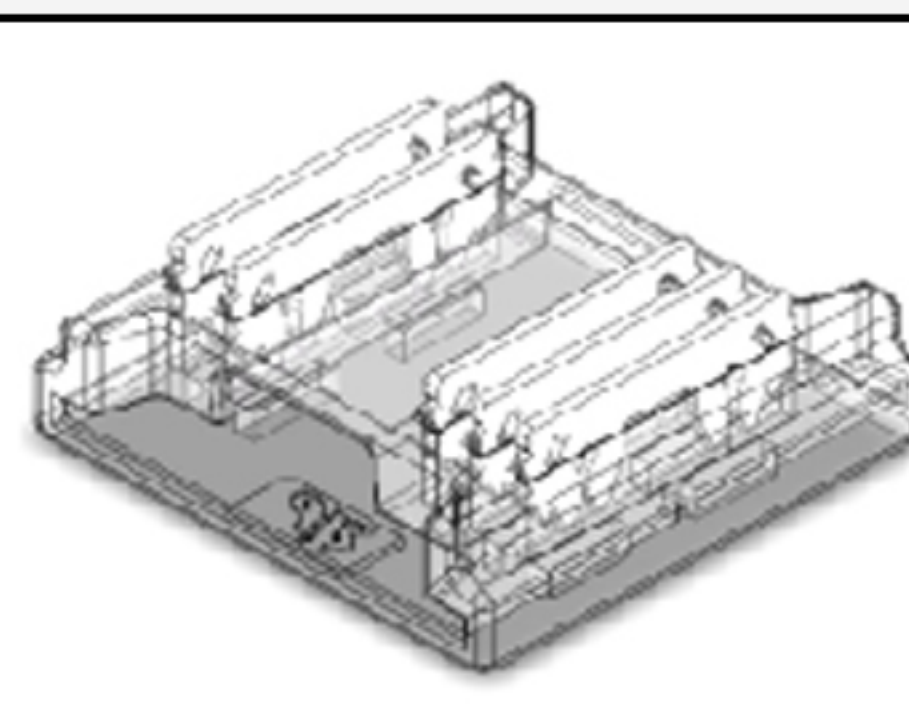


GL-12MMBB-5R-C

Available PCB size: 12mm
Pins: 5Pin
Typically Application: 5P COB
IP20 NON WATERPROOF
flexible led strip

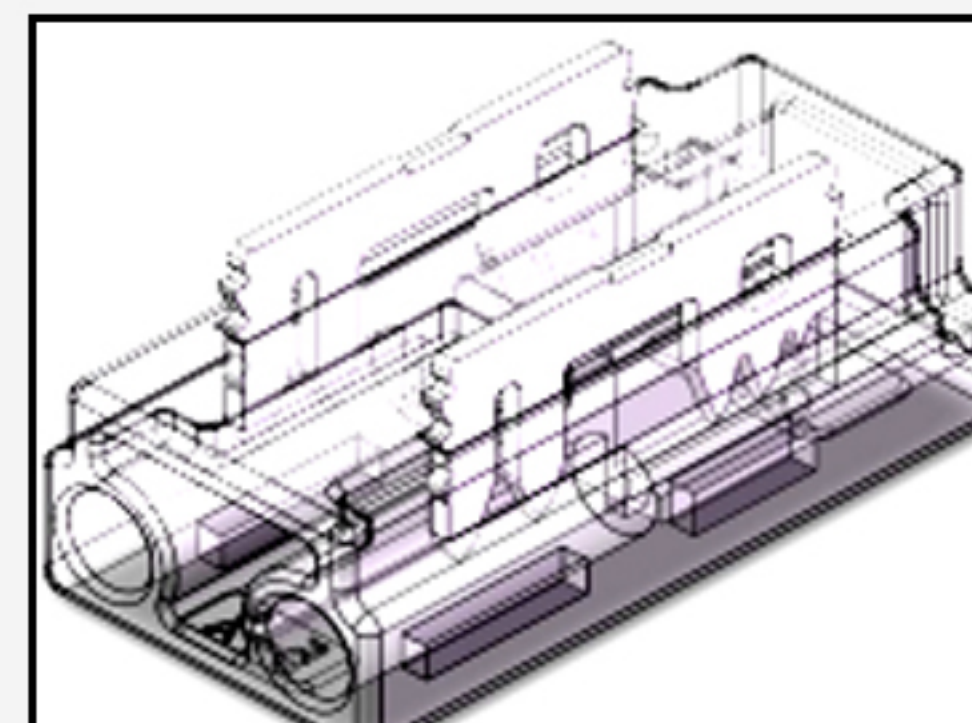

GL-5MMBX-2R-C
(With out cable)

Available PCB size: 5mm
Pins: 2 Pin
Typically Application: 2P COB
IP20 NON WATERPROOF
flexible led strip

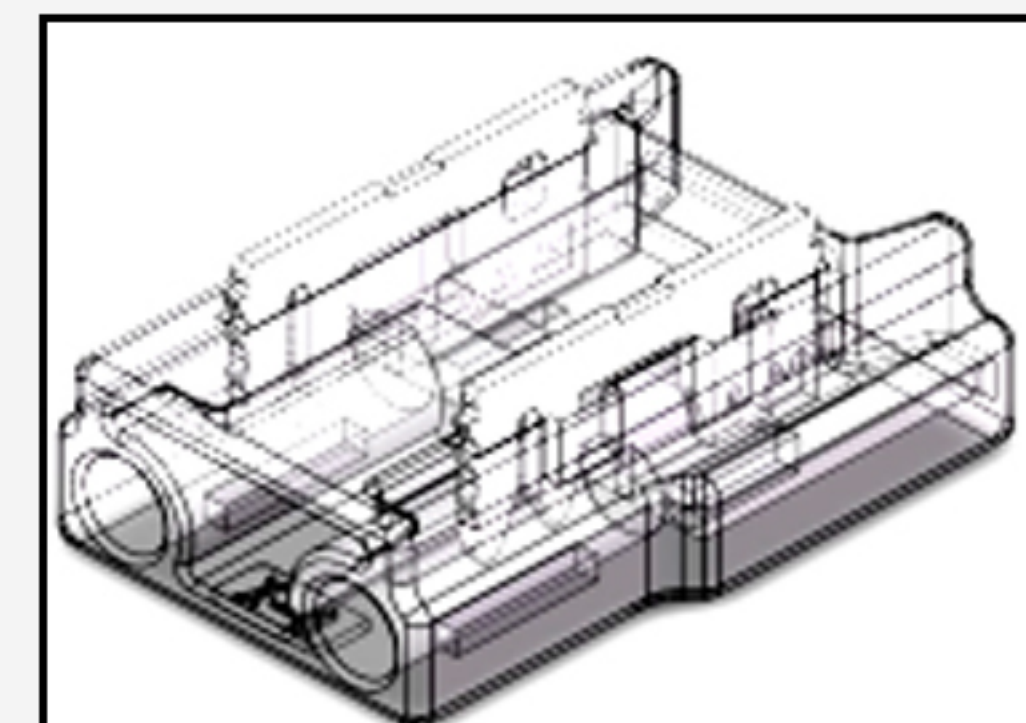


GL-8MMBX-2R-C
(With out cable)

Available PCB size: 8mm
Pins: 2 Pin
Typically Application: 2P SMD
or COB IP20 NON WATERPROOF
flexible led strip

COB LED Connector


Standard LED Connector

6 - Solid Lock

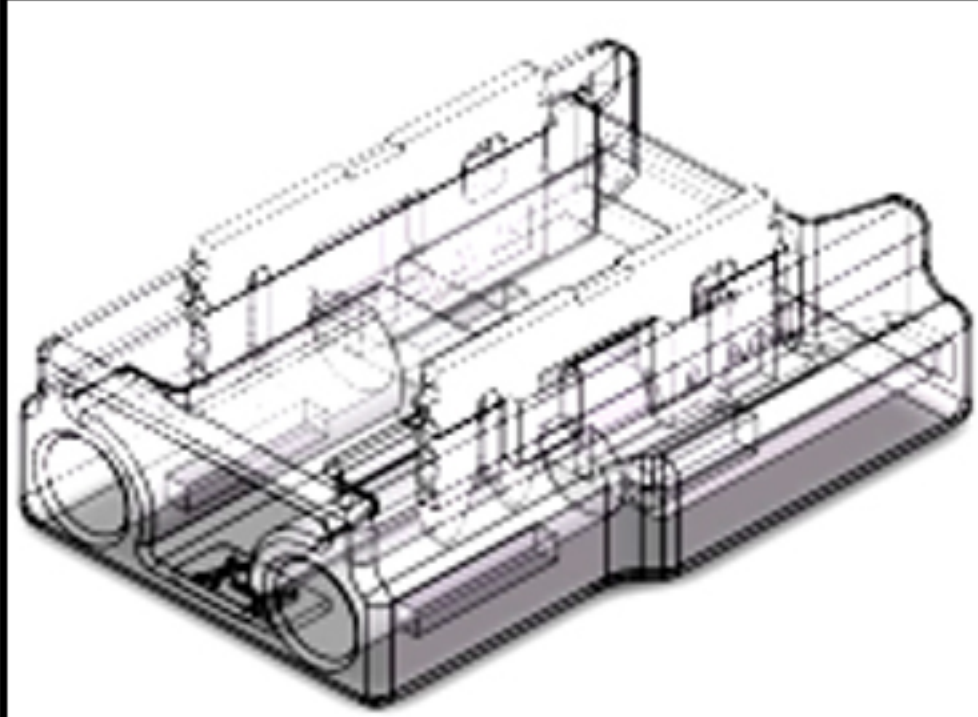


GL-10MMBX-2R-C
(With out cable)

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 2P SMD
or COB IP20 NON WATERPROOF
flexible led strip

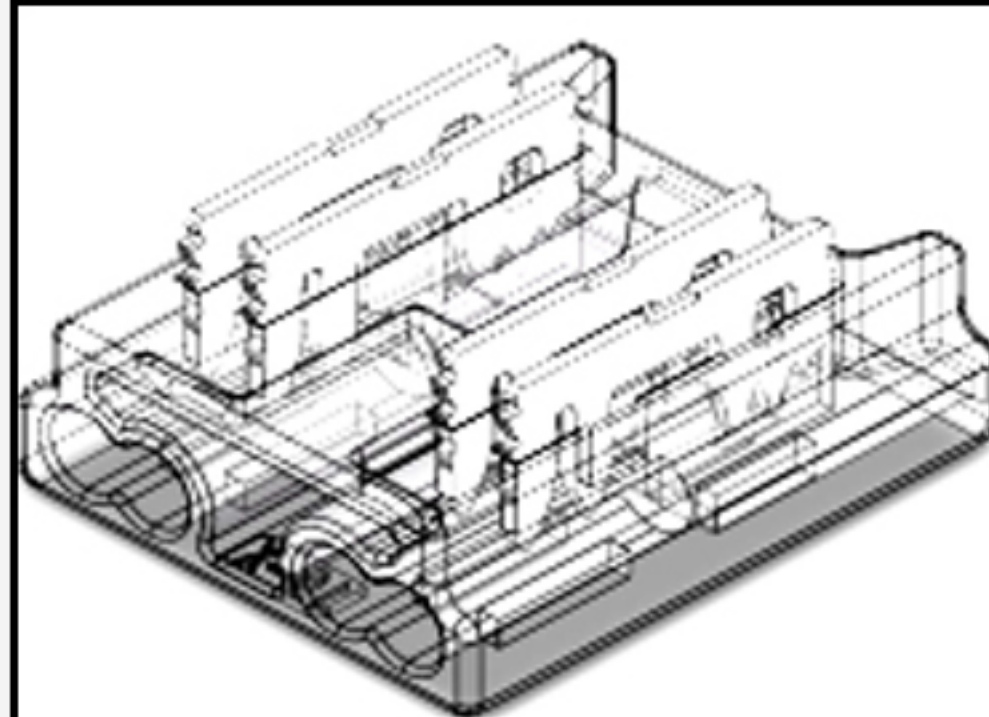


GL-10MMBX-3/4R-C
(With out cable)

Available PCB size: 10mm
Pins: 3Pin&4Pin
(Dual Color&RGB)
Typically Application:
3P&4P COB IP20 NON
WATERPROOF flexible led strip

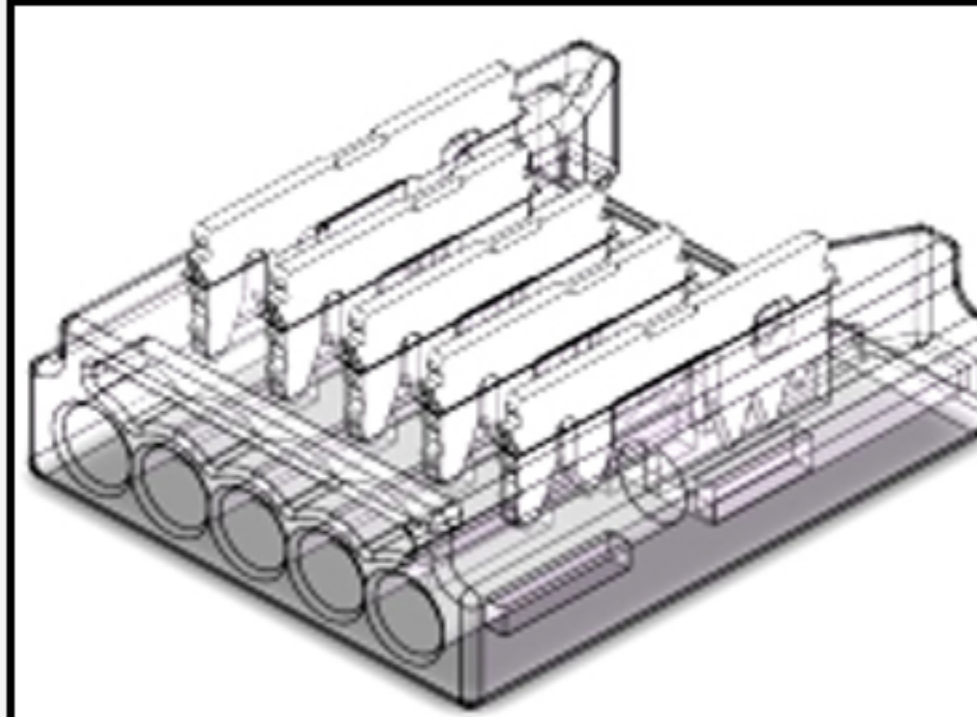


GL-12MMBX-5R-C
(With out cable)

Available PCB size: 12mm
Pins: 5Pin
Typically Application: 5P COB
IP20 NON WATERPROOF
flexible led strip

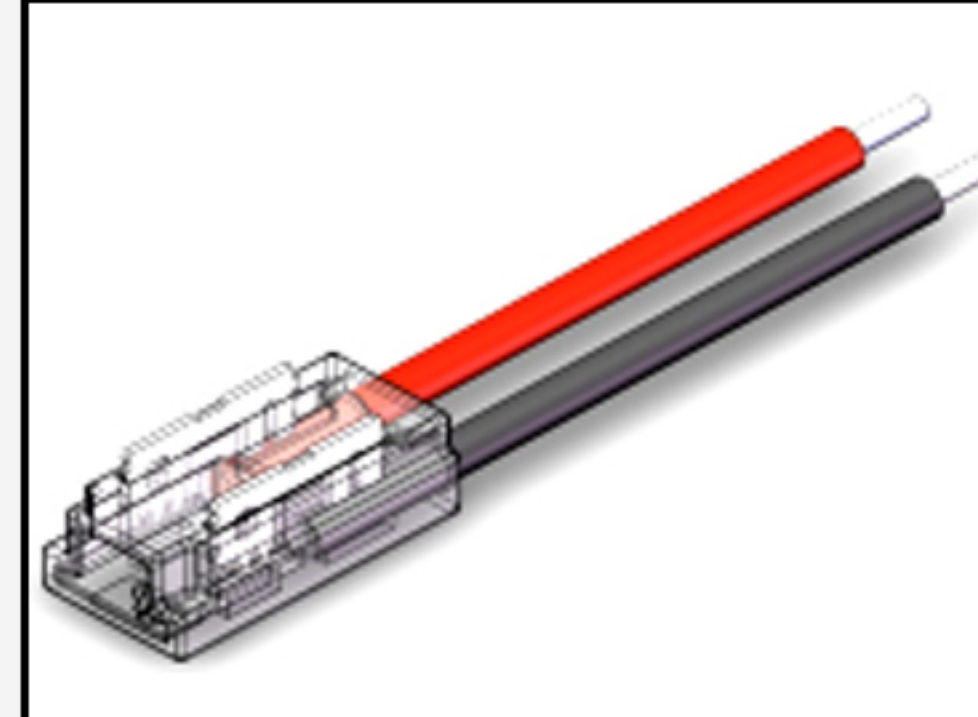


GL-5MMBX-2R-C
(With cable)

Available PCB size: 5mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm in
Length
Typically Application: 2P COB
IP20 NON WATERPROOF
flexible led strip

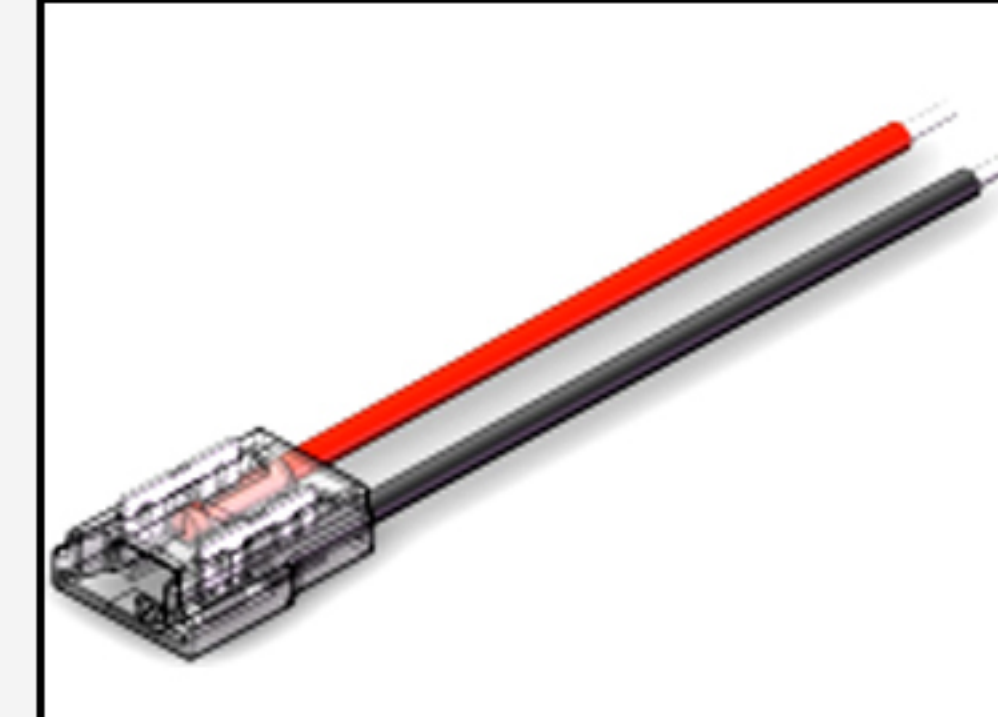


GL-8MMBX-2R-C
(With cable)

Available PCB size: 8mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm
in Length
Typically Application: 2P SMD
or COB IP20 NON WATERPROOF
flexible led strip

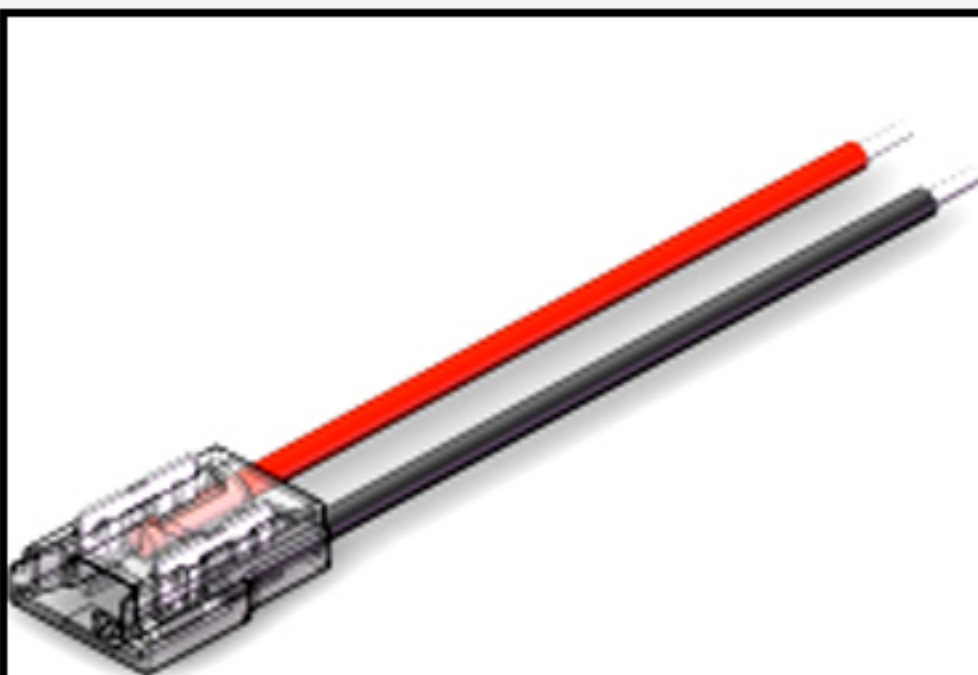


GL-10MMBX-2R-C
(With cable)

Available PCB size: 10mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm in
Length
Typically Application: 2P SMD
or COB IP20 NON WATERPROOF
flexible led strip

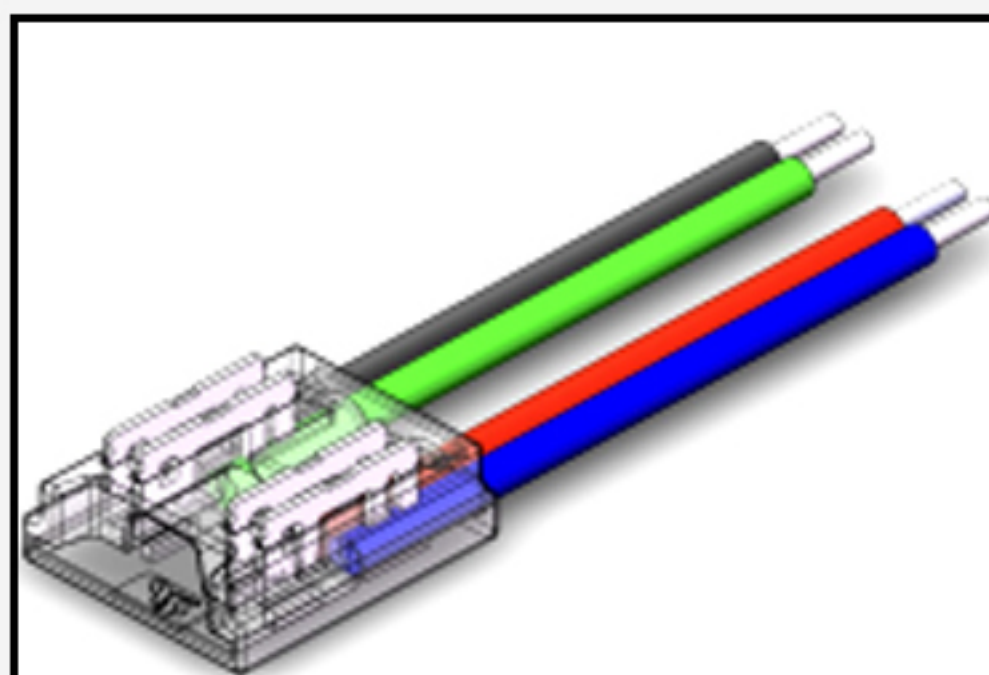


GL-10MMBX-3/4R-C
(With cable)

Available PCB size: 10mm
Pins: 3Pin&4Pin
(Dual Color&RGB)
Cable: 22#(0.34mm²),
15cm in Length
Typically Application:
3P&4P COB IP20 NON
WATERPROOF flexible led strip

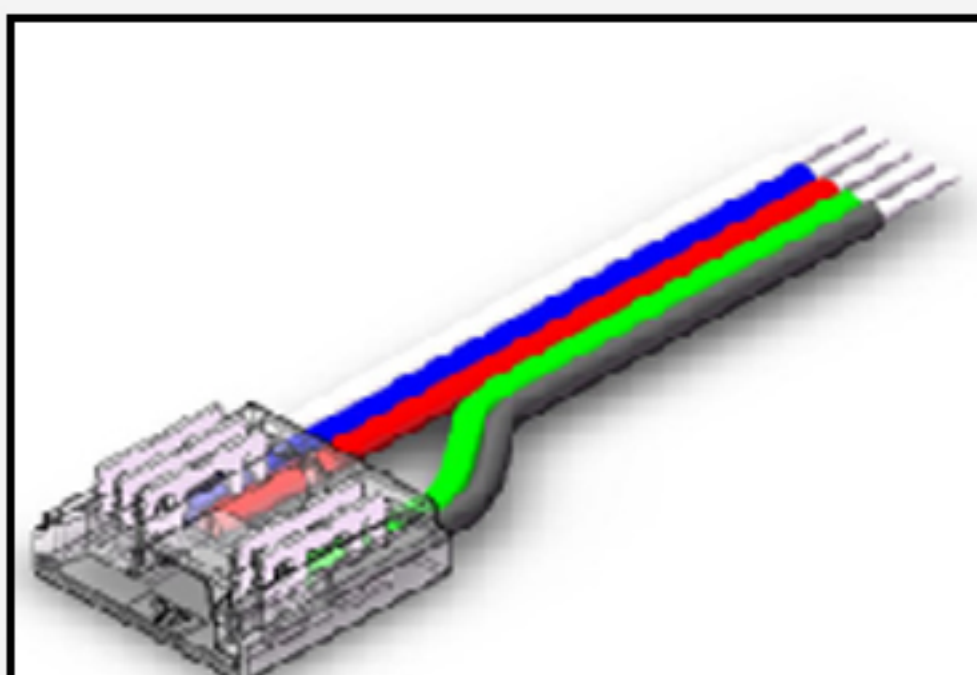


GL-12MMBX-5R-C
(With cable)

Available PCB size: 12mm
Pins: 5Pin
Cable: 22#(0.34mm²), 15cm
in Length
Typically Application: 5P
COB IP20 NON WATERPROOF
flexible led strip

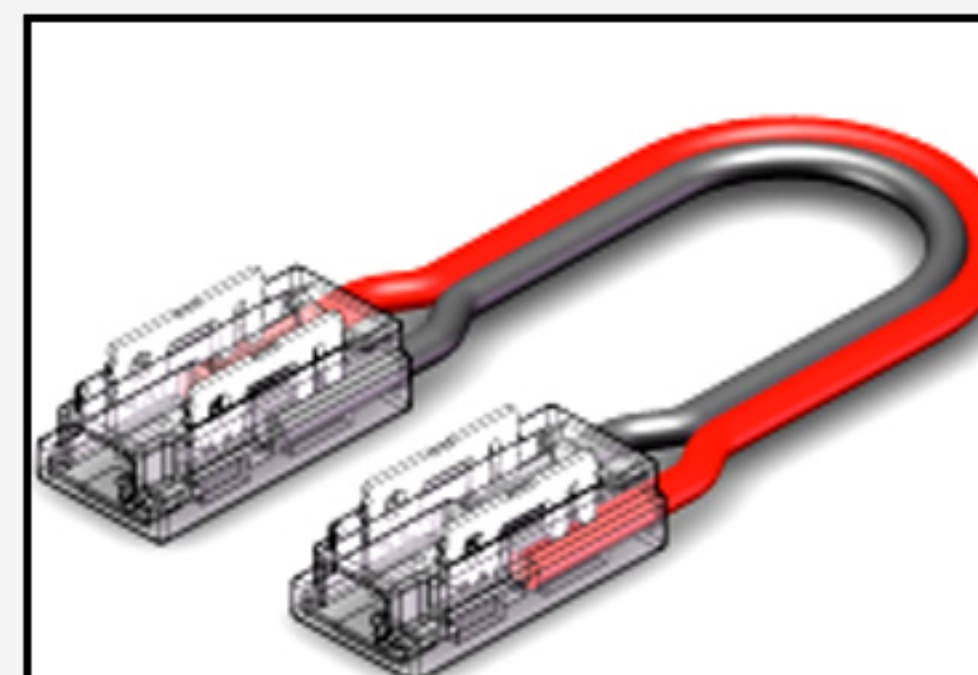

GL-5MMBXB-2R-C

Available PCB size: 5mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm
in Length
Typically Application: 2P COB
IP20 NON WATERPROOF
flexible led strip

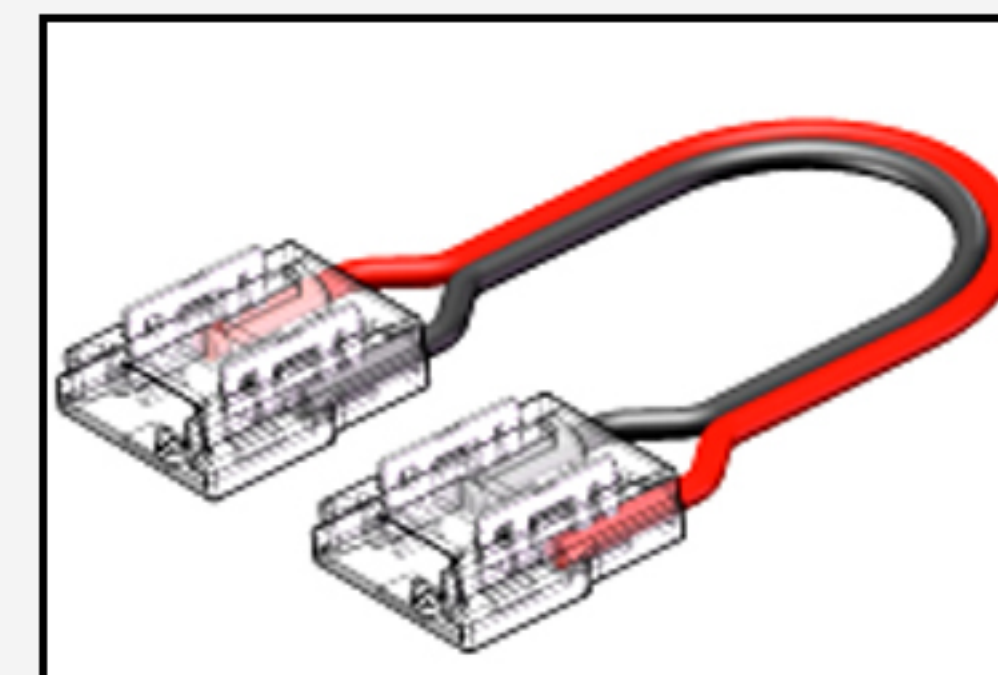


GL-8MMBXB-2R-C

Available PCB size: 8mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm
in Length
Typically Application: 2P SMD
or COB IP20 NON WATERPROOF
flexible led strip

COB LED Connector


Standard LED Connector

6 - Solid Lock

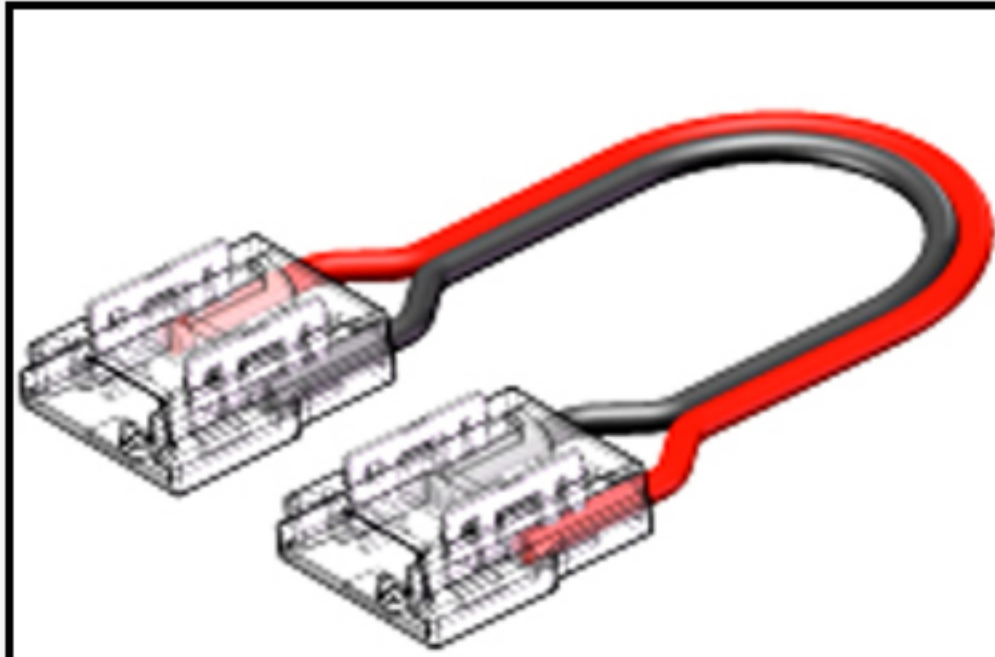


GL-10MMBXB-2R-C

Available PCB size: 10mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm
in Length
Typically Application: 2P SMD
or COB IP20 NON WATERPROOF
flexible led strip

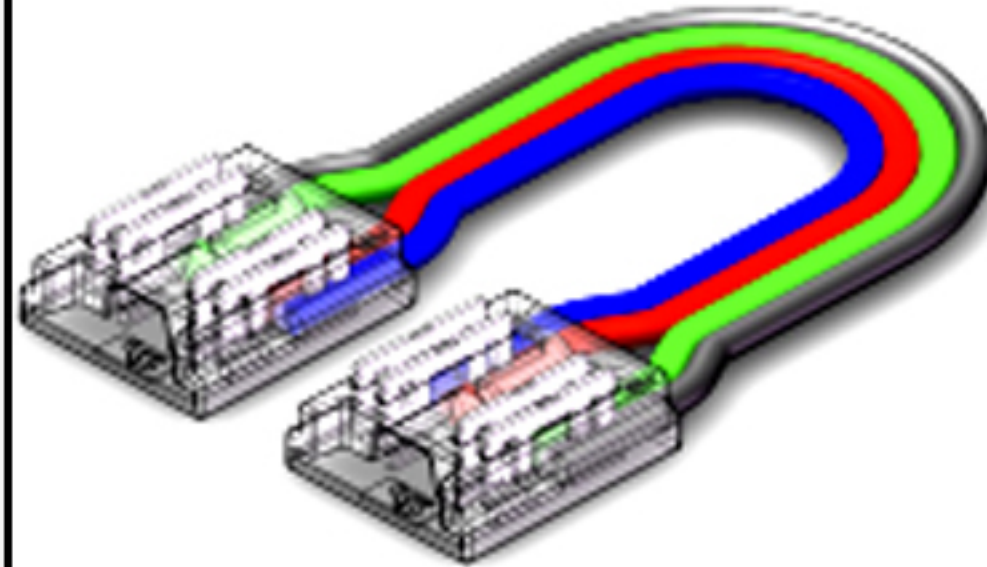

GL-10MMBXB-3/4R-C


Available PCB size: 10mm
Pins: 3Pin&4Pin
(Dual Color&RGB)
Cable: 22#(0.34mm²), 15cm
in Length
Typically Application: 3P&4P
COB IP20 NON WATERPROOF
flexible led strip

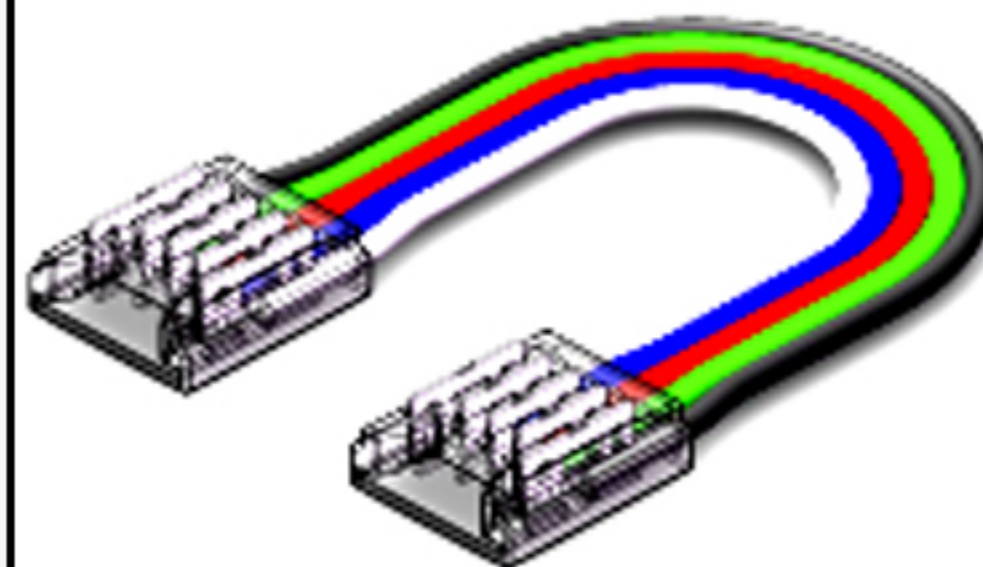

GL-12MMBXB-5R-C

Available PCB size: 12mm
Pins: 5Pin
Cable: 22#(0.34mm²), 15cm
in Length
Typically Application: 5P COB
IP20 NON WATERPROOF
flexible led strip


SMD LED CONNECTOR

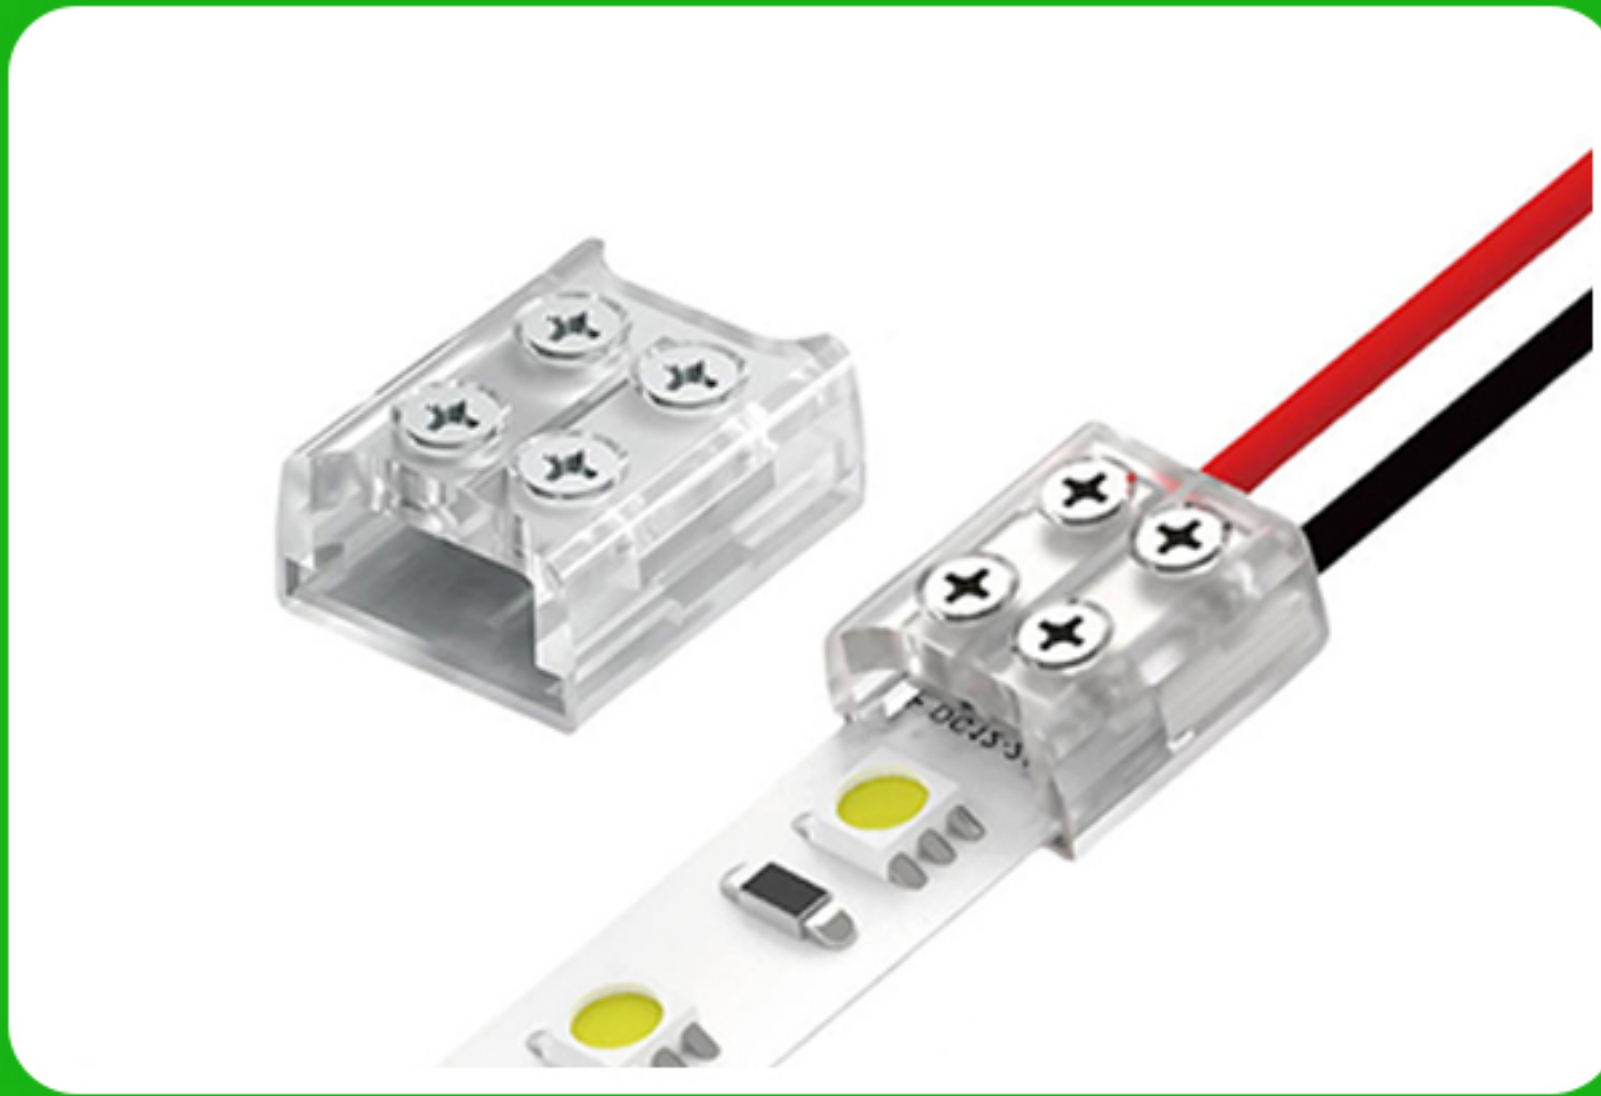

SCREW CONNECTOR



BEETLE CLIP CONNECTOR

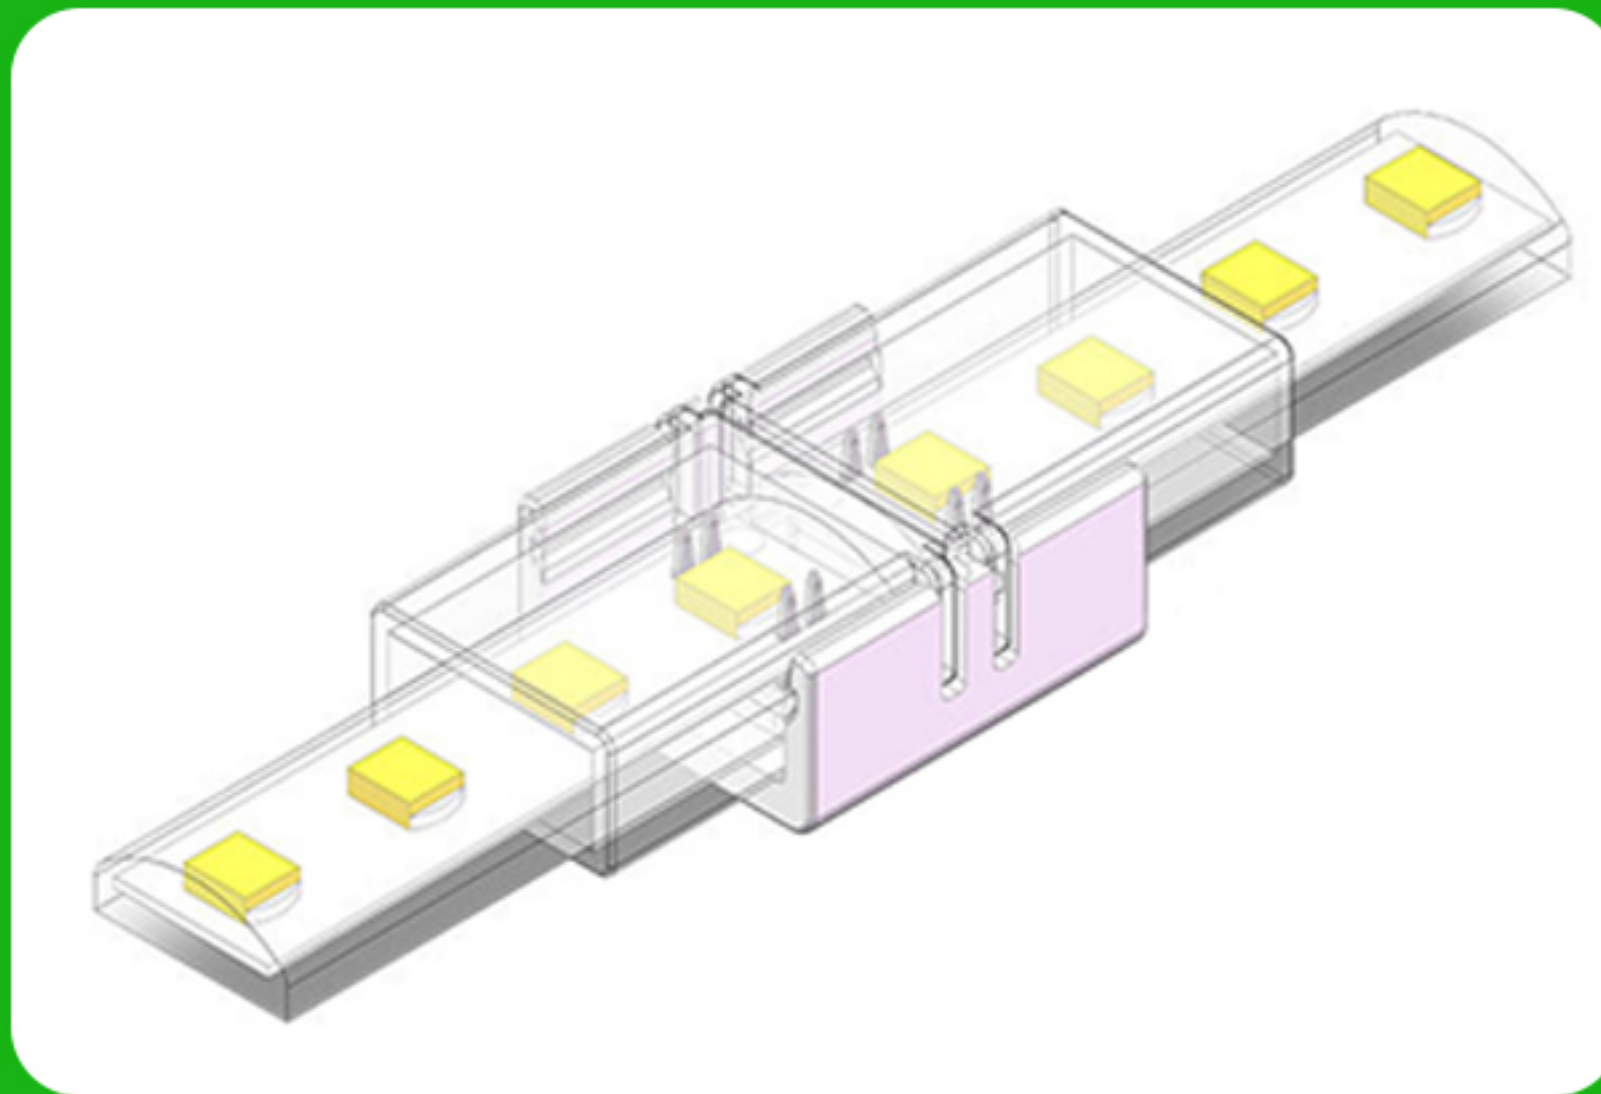

IP67/IP68 CONNECTOR



HIPPO CONNECTOR

**SMD LED
Connector**

Screw Connector



GL-8MMBB-2SC

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /5050
flexible led strip
Strip to Strip connection



GL-8MMBX-2SC

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /5050
flexible led strip
Strip to wire connection



GL-10MMBB-2SC

Available PCB size: 10mm
Pins: 2 Pin
Typically Application:
10mm width
2835/3528/3014 /5050
flexible led strip
Strip to Strip connection




GL-10MMBX-2SC

Available PCB size: 10mm
Pins: 2 Pin
Typically Application:
10mm width
2835/3528/3014 /335
flexible led strip
Strip to wire connection


SMD LED Connector

Beetle Clip Connector

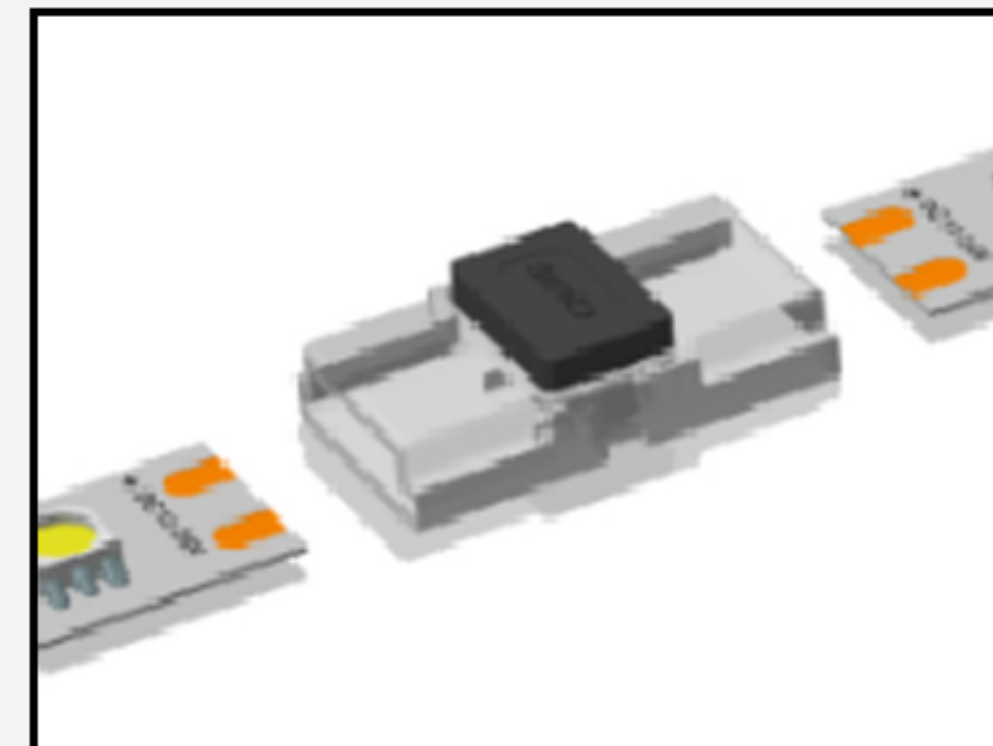


GL-8MMBB-2N

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335 flexible
led stripGood option for
connection of led strip lights
in Aluminium profile

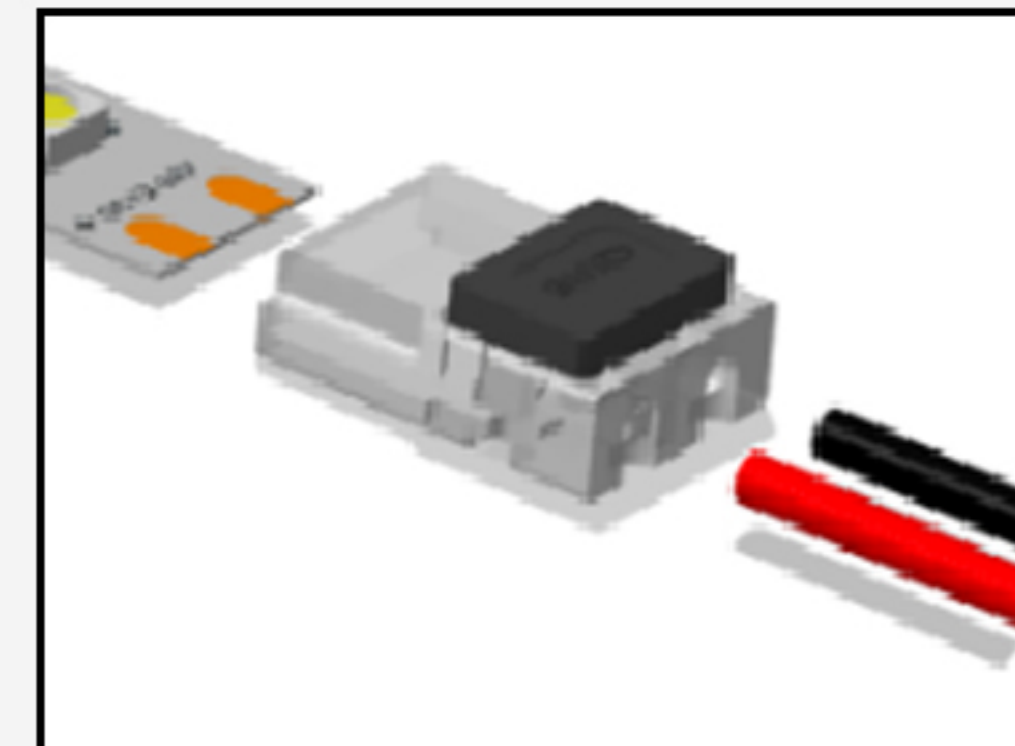


GL-8MMBX-2N

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335 flexible
led stripGood option for
connection of led strip lights
in Aluminium profile

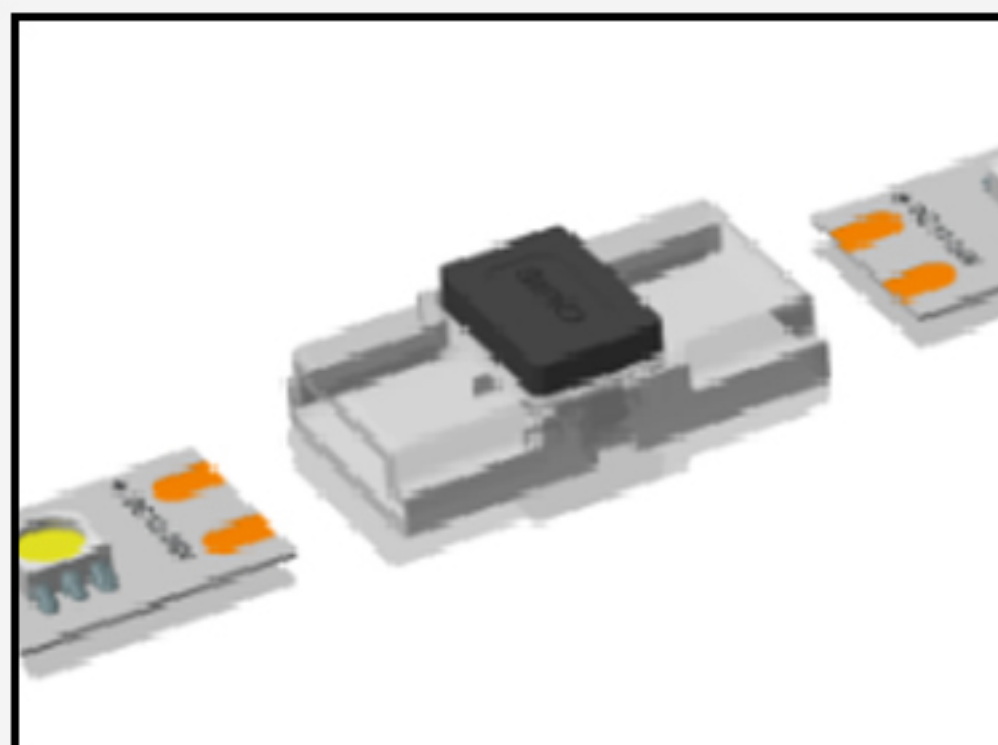

GL-10MMBB-2N

Available PCB size: 10mm
Pins: 2 Pin
Typically Application:
10mm width
2835/3528/3014 /335 flexible
led stripGood option for
connection of led strip lights
in Aluminium profile

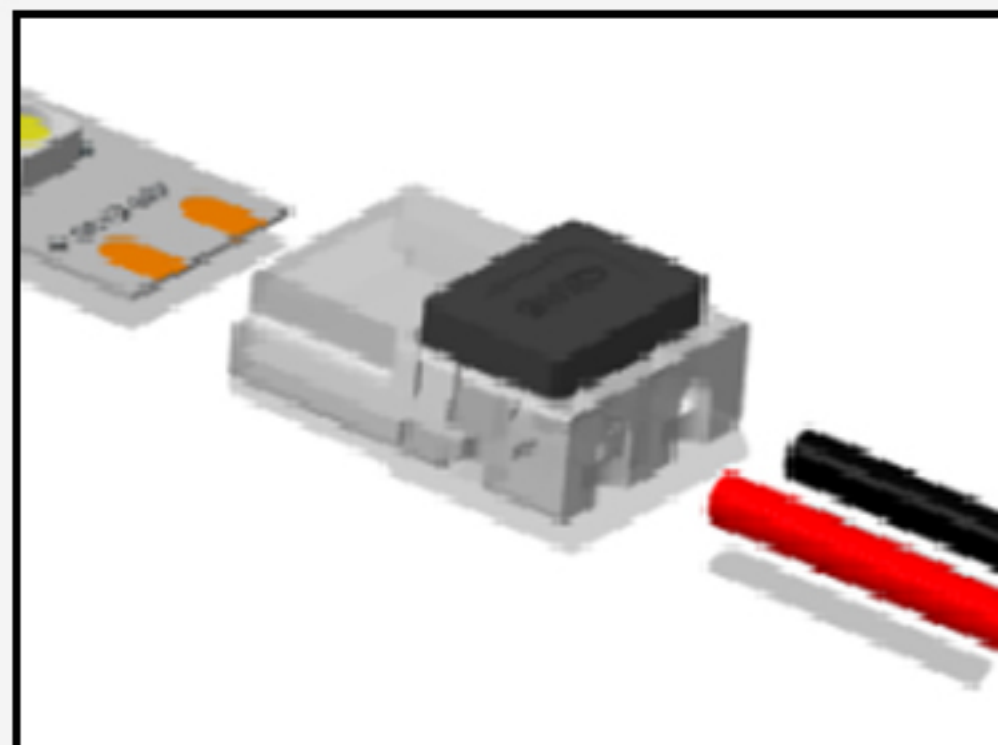


GL-10MMBX-2N

Available PCB size: 10mm
Pins: 2 Pin
Typically Application:
10mm width
2835/3528/3014 /335 flexible
led stripGood option for
connection of led strip lights
in Aluminium profile


SMD LED Connector

IP67/IP68 Connector

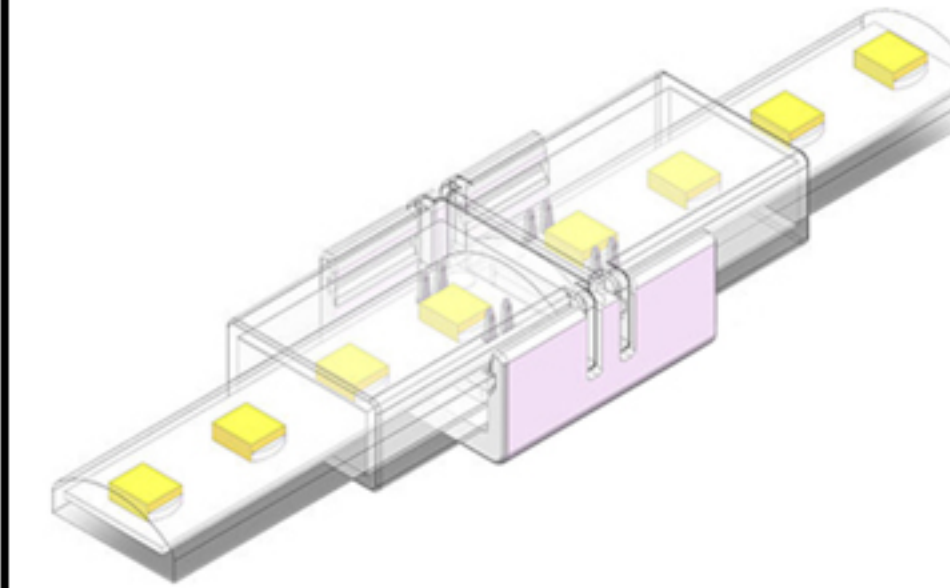


GL-8MMBB-2RW-C

Available PCB size: 8mm
Pins: 2 Pin
Typically Application: 2P SMD
IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

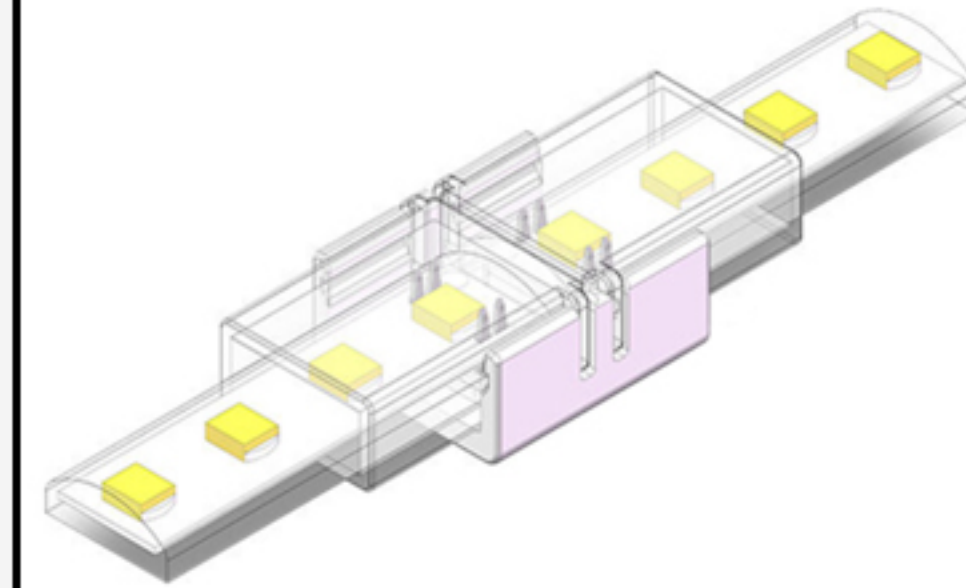


GL-10MMBB-2RW-C

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 2P SMD
IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

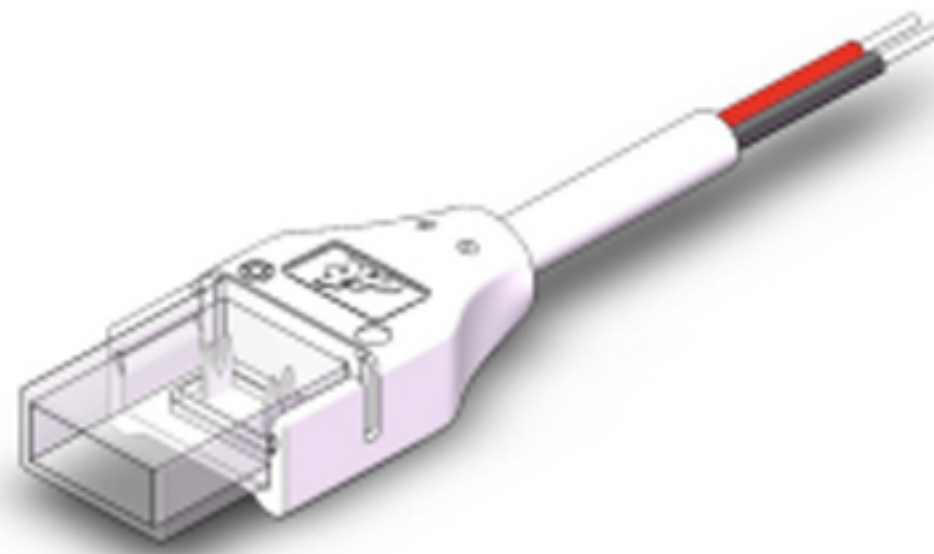


GL-8MMBX-2RW-C

Available PCB size: 8mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm in Length
Typically Application: 2P SMD
IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

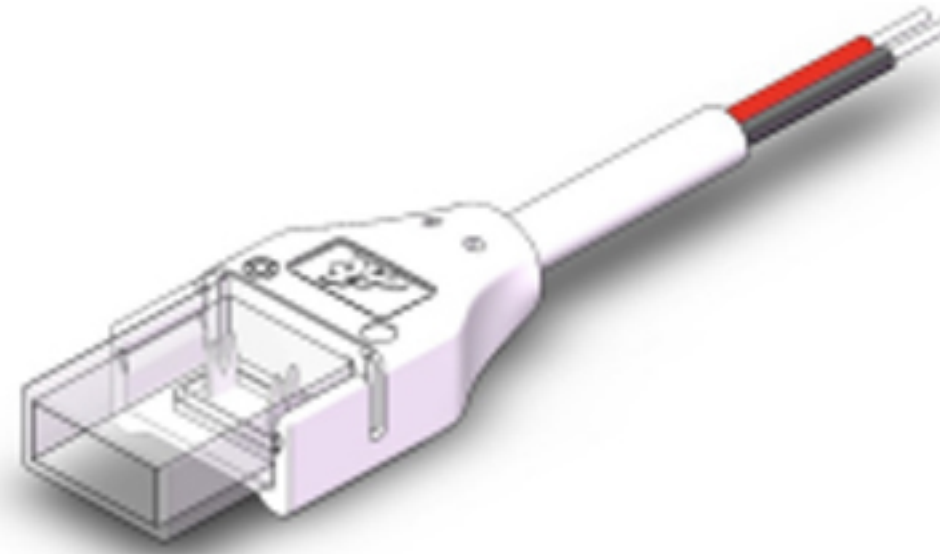


GL-10MMBX-2RW-C

Available PCB size: 10mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm in Length
Typically Application: 2P SMD
IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

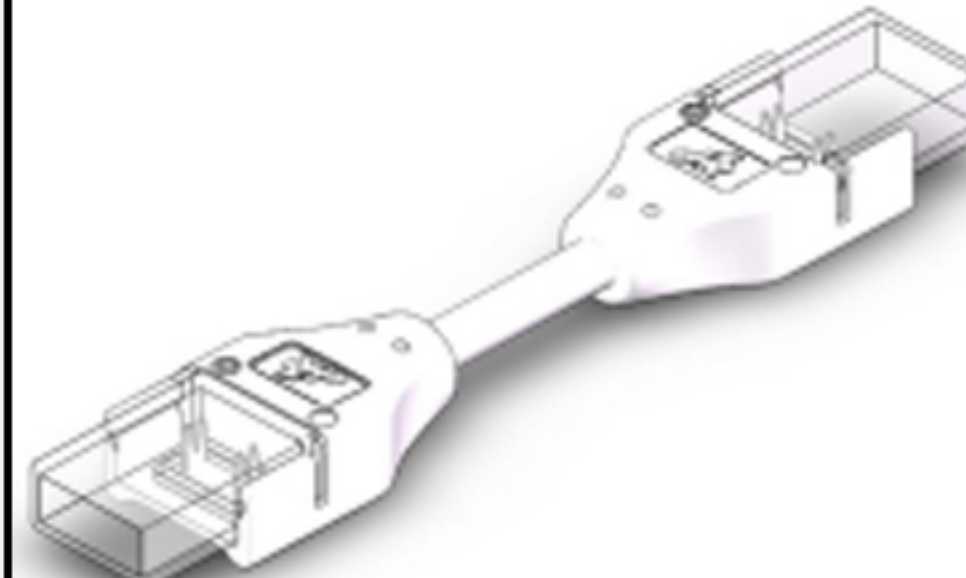

GL-8MMBxB-2RW-C

Available PCB size: 8mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm in Length
Typically Application: 2P SMD
IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

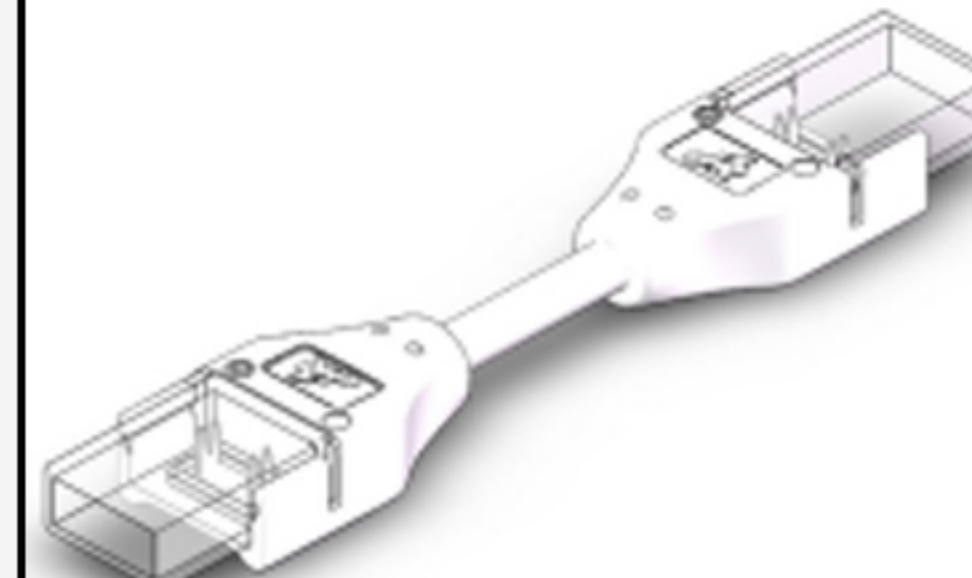

GL-10MMBxB-2RW-C

Available PCB size: 10mm
Pins: 2 Pin
Cable: 20#(0.5mm²), 15cm in Length
Typically Application: 2P SMD
IP67 IP68 SILICON TUBE
WATERPROOF flexible led strip

SMD LED Connector

Hippo Connector Waterproof




GL-8MMBB-2HW

Available PCB size: 8mm
Pins: 2 Pin
Typically Application: 8mm
width
2835/3528/3014 /335 GLUE
DROP IP65 WATERPROOF
flexible led strip



GL-8MMBX-2HW

Available PCB size: 8mm
Pins: 2 Pin
Typically Application: 8mm
width
2835/3528/3014 /335 GLUE
DROP IP65 WATERPROOF
flexible led strip
Fitted cable: 0.34-0.75mm²
or 22-20# AWG

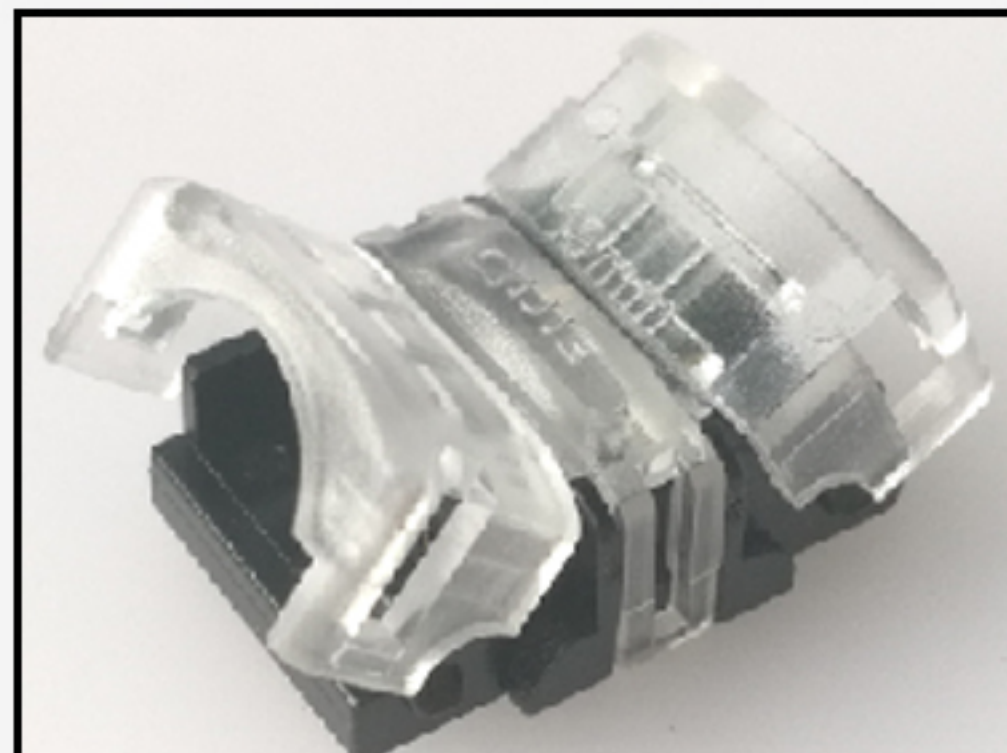

GL-10MMBB-2HW

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 5050/5630/5730/
3014/7020 GLUE DROP IP65
WATERPROOF flexible led strip



GL-10MMBX-2HW

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 /5050/5630/5730/
3014/7020 GLUE DROP IP65
WATERPROOF flexible led strip
Fitted cable: 0.34-0.75mm²
or 22-20# AWG



GL-10MMBB-3HW

Available PCB size: 10mm
Pins: 3 Pin
Typically Application: 10mm
width 3528/2835
/5050/5630/5730/3014/7020
GLUE DROP IP65 WATERPROOF
CT flexible led strip



GL-10MMBX-3HW

Available PCB size: 10mm
Pins: 3 Pin
Typically Application: 10mm
width 3528/2835
/5050/5630/5730/3014/7020
GLUE DROP IP65 WATERPROOF
CT flexible led strip
Fitted cable: 0.34-0.75mm²
or 22-20# AWG



GL-10MMBB-4HW

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 GLUE DROP IP65
WATERPROOF RGB flexible
led strip

SMD LED Connector

Hippo Connector Waterproof




GL-12MMBB-6HW

Available PCB size: 12mm
Pins: 6 Pin
Typically Application: 12mm
width 5050 GLUE DROP IP65
WATERPROOF RGBW flexible
led strip




GL-12MMBX-6HW

Available PCB size: 12mm
Pins: 6 Pin
Typically Application: 12mm
width 5050 GLUE DROP IP65
WATERPROOF RGBW flexible
led strip

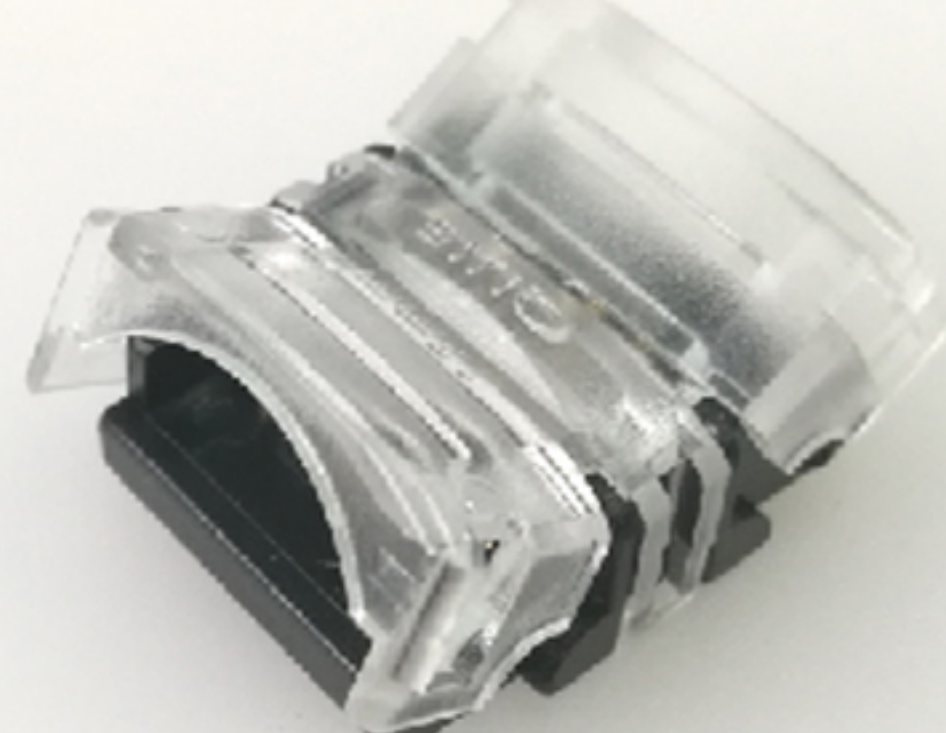

GL-10MMBX-4HW

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 GLUE DROP IP65
WATERPROOF RGB flexible
led strip

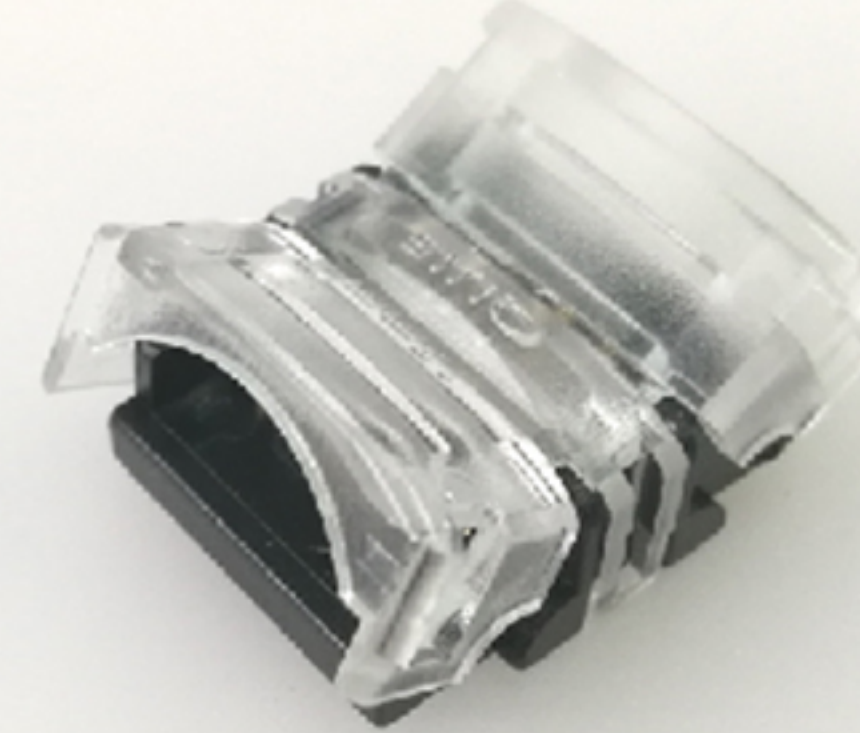

GL-12MMBB-5HW

Available PCB size: 12mm
Pins: 5 Pin
Typically Application: 12mm
width 5050 GLUE DROP IP65
WATERPROOF RGBW flexible
led strip



GL-12MMBX-5HW

Available PCB size: 12mm
Pins: 5 Pin
Typically Application: 12mm
width 5050 GLUE DROP IP65
WATERPROOF RGBW flexible
led strip

SMD LED Connector

Hippo Connector

Non waterproof




GL-8MMBB-2H

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip




GL-8MMBX-2H

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335 flexible
led strip
Fitted cable: 0.34-0.75mm²
or 22-20# AWG

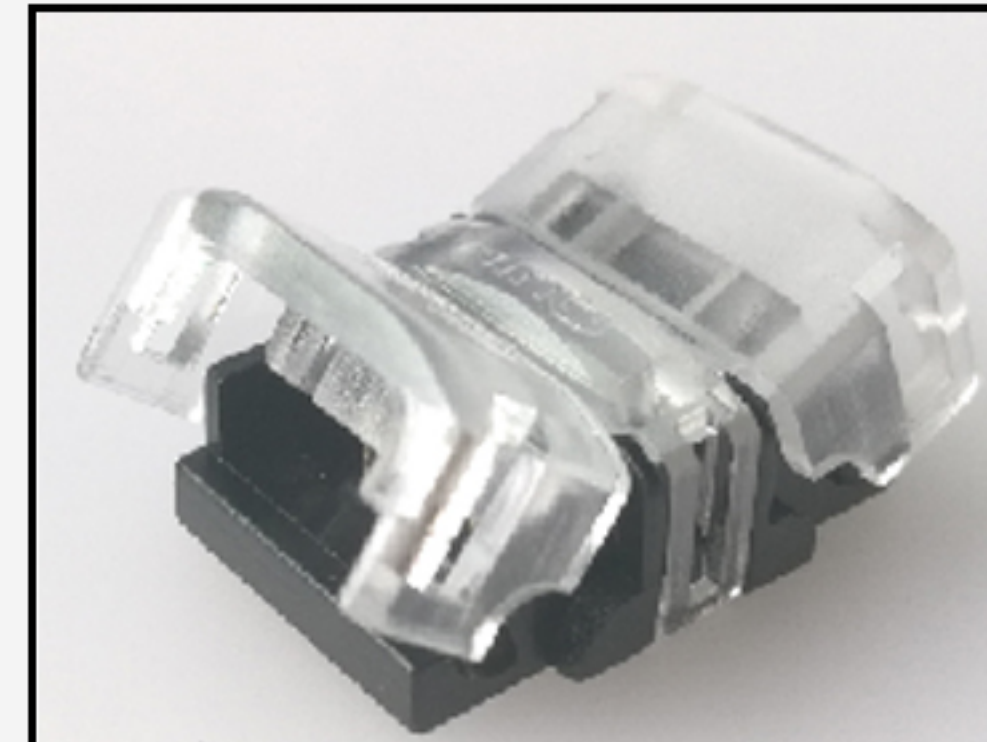

GL-10MMBB-2H

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 5050/5630/5730/
3014/7020 flexible led strip

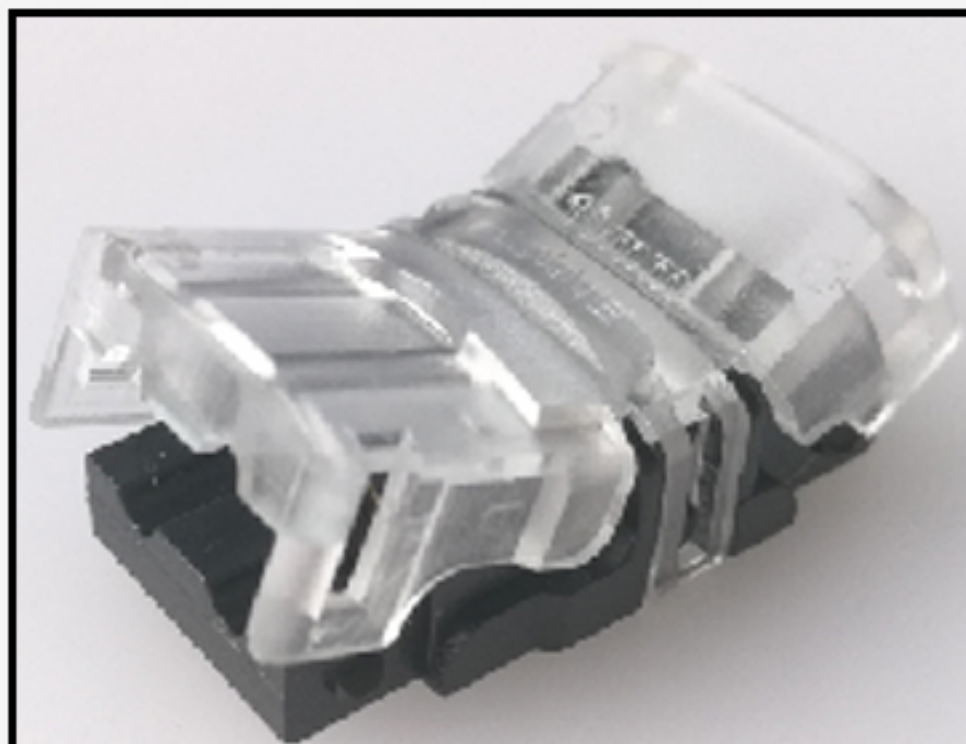


GL-10MMBX-2H

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 /5050/5630/5730/
3014/7020 flexible led strip
Fitted cable: 0.34-0.75mm²
or 22-20# AWG



GL-10MMBB-2H-A For 240led/m 10mm PCB 2pin

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 240led/m 3528/2835 /
3030flexible led strip

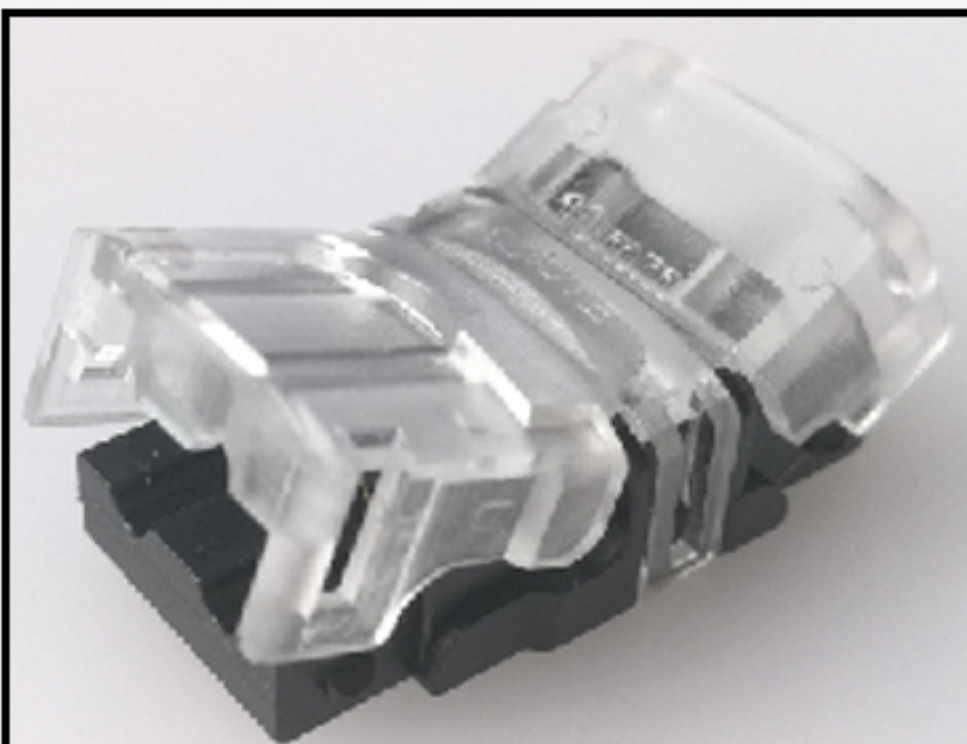

GL-10MMBX-2H-A For 240led/m 10mm PCB 2pin

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 240led/m 3528/2835 /
3030flexible led strip



GL-10MMBB-3H

Available PCB size: 10mm
Pins: 3 Pin
Typically Application: 10mm
width3528/2835
/5050/5630/5730/3014/7020
CT flexible led strip




GL-10MMBX-3H

Available PCB size: 10mm
Pins: 3 Pin
Typically Application: 10mm
width3528/2835
/5050/5630/5730/3014/7020
CT flexible led strip
Fitted cable: 0.34-0.75mm² or
22-20# AWG

SMD LED Connector

Hippo Connector

Non waterproof

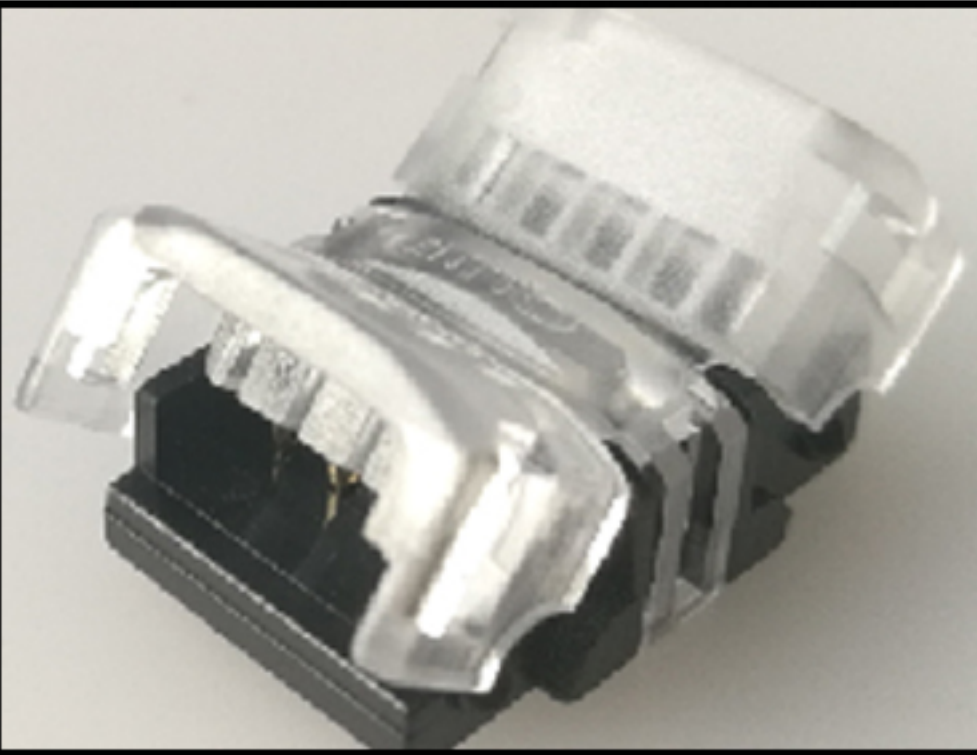

GL-10MMBB-4H

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 RGB flexible
led strip



GL-10MMBX-4H

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 RGB flexible
led strip



GL-12MMBB-2H
For 240led/m 12mm PCB 2pin

Available PCB size: 12mm
Pins: 2 Pin
Typically Application: 12mm
width 240led/m 3528/2835 /
3030flexible led strip



GL-12MMBX-2H
For 240led/m 12mm PCB 2pin

Available PCB size: 12mm
Pins: 2 Pin
Typically Application: 12mm
width 240led/m 3528/2835 /
3030flexible led strip



GL-12MMBB-5H

Available PCB size: 12mm
Pins: 5 Pin
Typically Application: 12mm
width 5050 RGBW flexible
led strip



GL-12MMBX-5H

Available PCB size: 12mm
Pins: 5 Pin
Typically Application: 12mm
width 5050 RGBW flexible
led strip



GL-12MMBB-6H

Available PCB size: 12mm
Pins: 6 Pin
Typically Application: 12mm
width 5050 RGBWW flexible
led strip



GL-12MMBX-6H

Available PCB size: 12mm
Pins: 6 Pin
Typically Application: 12mm
width 5050 RGBWW flexible
led strip



GL-5MMBB-2H For 5mm PCB

Available PCB size: 5mm
Pins: 2 Pin
Typically Application:
5mm width
2835/3528/3014 /335
flexible led strip



GL-5MMBX-2H For 5mm PCB

Available PCB size: 5mm
Pins: 2 Pin
Typically Application:
5mm width
2835/3528/3014 /335
flexible led strip
Fitted cable: 0.34-0.75mm²
or 22-20# AWG

OTHER LED CONNECTOR



DC CONNECTOR



PCB CONNECTOR




WIRE



WIRE CONNECTOR


Other LED Connector

DC Connector

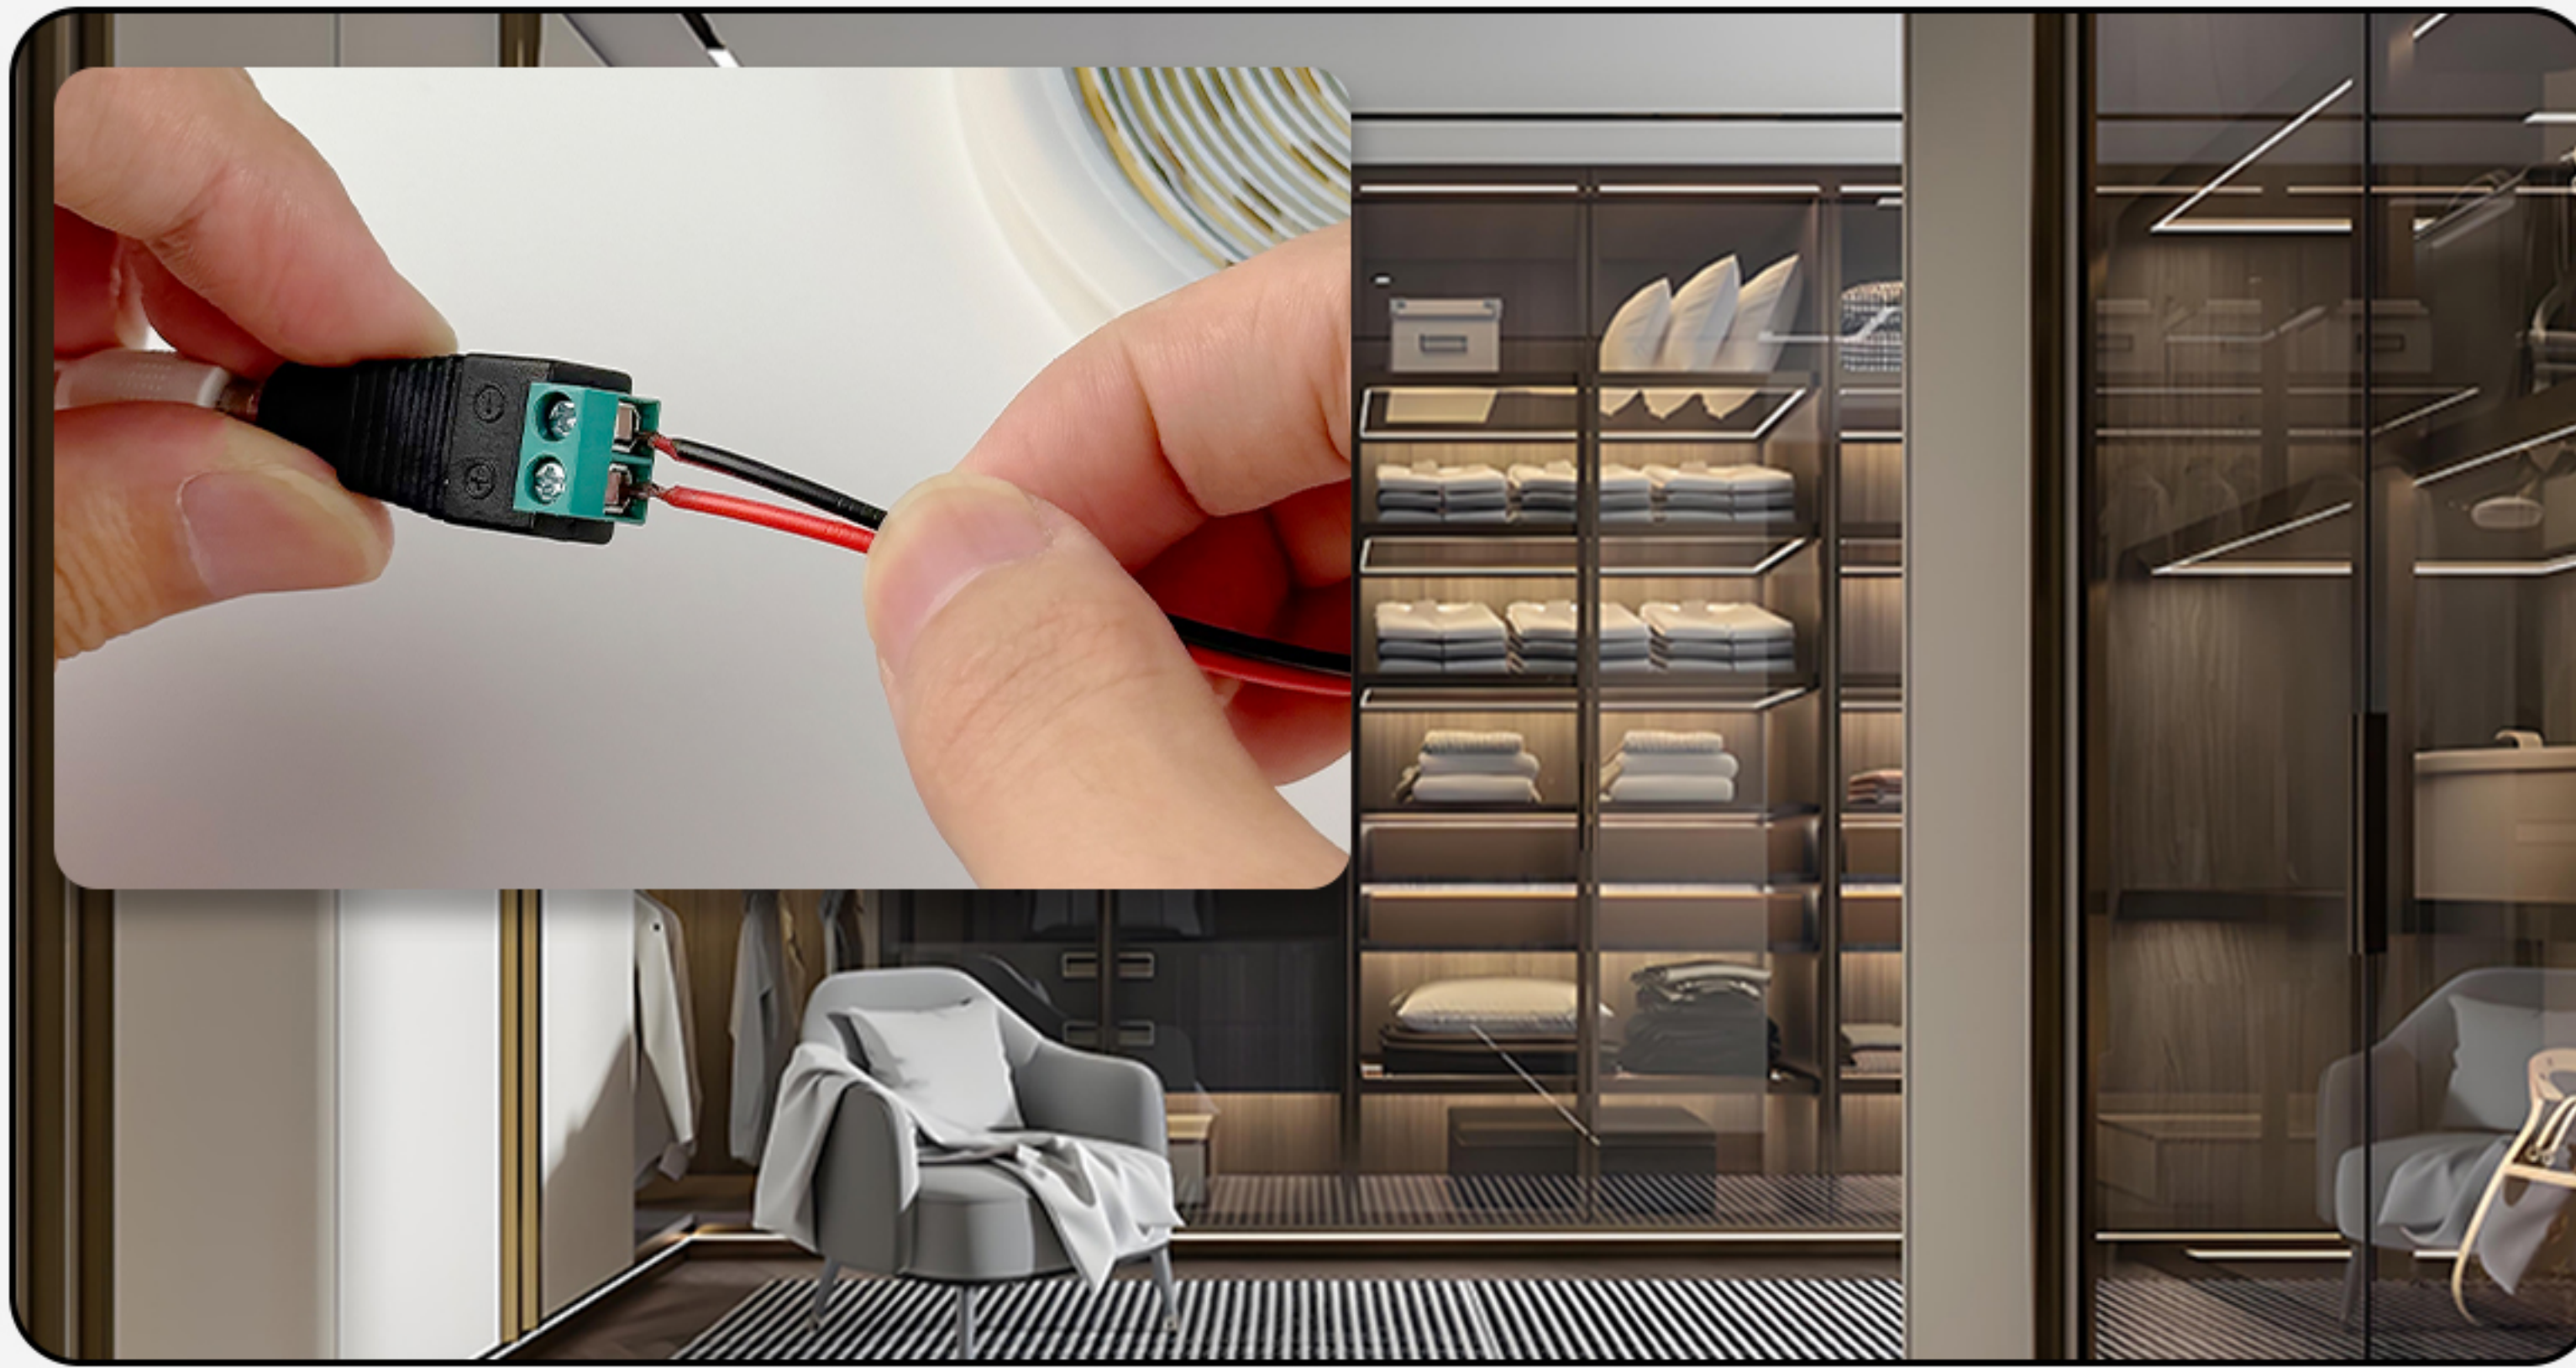

GL-1FD3PIN4

Connectors: 4PIN connetor on both side with pins
Cable: 1feed 3, double insulation 4color cable, 20cm in each side.
Typically Application: extension of RGB Flexible led strip light

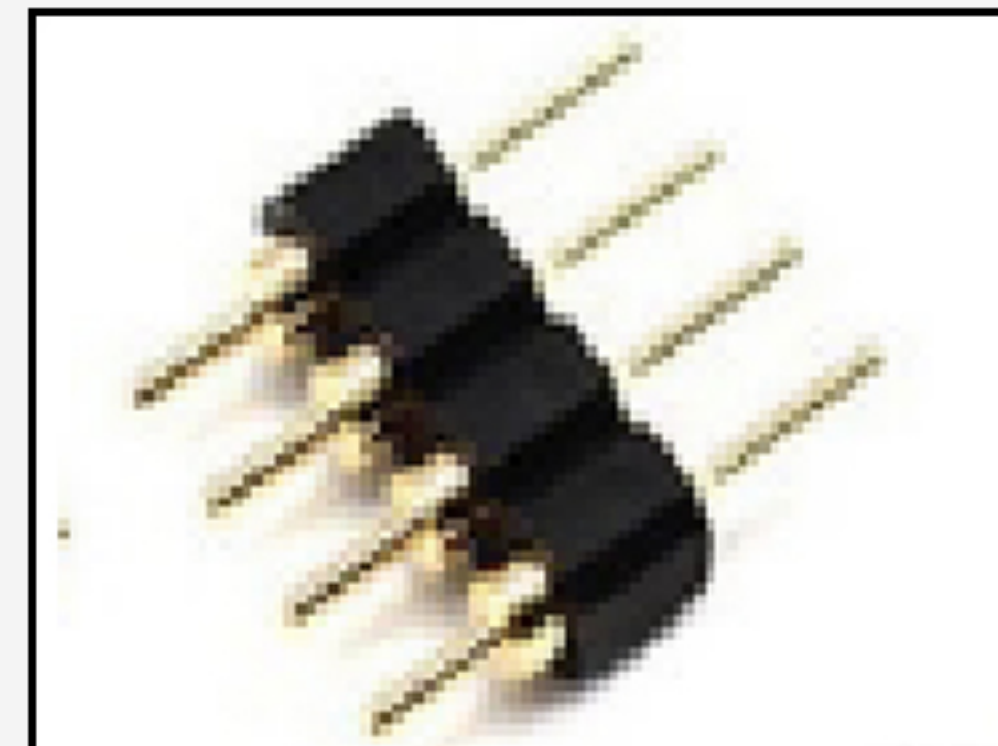


GL-4P

Connectors: 4PIN
Typically Application: RGB Flexible led strip and MINI RGB controller



GL-EXTPIN4

Connectors: 4PIN connetor on both end with pin
Cable: Double insulation 4color cable, 1m in length
Typically Application: extension of RGB Flexible led strip light

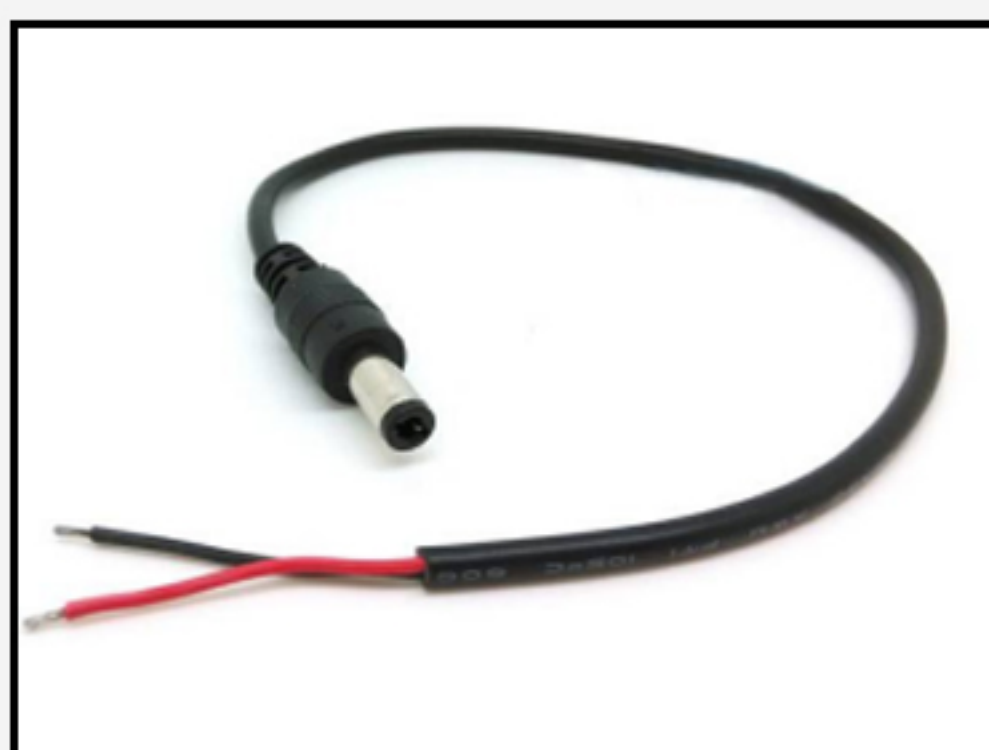

GL-DC2.1MX

Connectors: DC5.5*2.1mm male in one end, another end bare tinned
Cable: Double insulation cable, 10cm in length
Typically Application: Flexible&rigid led strip, led module, led panel light, Power supply, etc



GL-DC2.1FX

Connectors: DC5.5*2.1mm female in one end, another end bare tinned
Cable: Double insulation cable, 10cm in length
Typically Application: Flexible&rigid led strip, led module, led panel light, Power supply, etc



GL-DC2.1FXM2A

Connectors: DC5.5*2.1mm, 1*female come with 2*male
Cable: Double insulation Red&Black cable, main cable UL 20AWG, branch UL 22AWG. 20cm in length.
Typically Application: Flexible&rigid led strip, led module, led panel light, Power supply, etc



GL-DC2.1FXM3

Connectors: DC5.5*2.1mm, 1*female come with 3*male
Cable: Double insulation Red&Black cable, main cable UL 20AWG, branch UL 24AWG. 20cm in length.
Typically Application: Flexible&rigid led strip, led module, led panel light, Power supply, etc

Other LED Connector

DC Connector



GL-DC2.1FXM4

Connectors: DC5.5*2.1mm, 1*female come with 4*male
Cable: Double insulation Red&Black cable, main cable UL 20AWG, branch UL 24AWG. 20cm in length.
Typically Application: Flexible&rigid led strip, led module, led panel light, Power supply, etc



GL-DC2.1FXM5

Connectors: DC5.5*2.1mm, 1*female come with 5*male
Cable: Double insulation Red&Black cable, main cable UL 20AWG, branch UL 26AWG. 20cm in length.
Typically Application: Flexible&rigid led strip, led module, led panel light, Power supply, etc



GL-DC2.1FXM6

Connectors: DC5.5*2.1mm, 1*female come with 6*male
Cable: Double insulation Red&Black cable, main cable UL 20AWG, branch UL 26AWG. 20cm in length.
Typically Application: Flexible&rigid led strip, led module, led panel light, Power supply, etc



GL-DC2.1YM

Connectors: DC 5.5*2.1 male
Pins: 2 Pin
Typically Application: Flexible &rigid led strip, led module, led panel light, Power supply, etc



GL-DC2.1YF

Connectors: DC 5.5*2.1 male
Pins: 2 Pin
Typically Application: Flexible &rigid led strip, led module, led panel light, Power supply, etc



GL-1FD2PIN4

Connectors: 4PIN connetor on both side with pins
Cable: 1feed 2, double insulation 4color cable, 20cm in each side.
Typically Application: extension of RGB Flexible led strip light

Other LED Connector

PCB Connector



GL-8MMPCBL-2A

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip



GL-8MMPCBT-2A

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip



GL-8MMPCBX-2A

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip



GL-8MMPCBL-2B

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip



GL-8MMPCBT-2B

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip



GL-8MMPCBX-2B

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip



GL-8MMPCBL-2S

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip

Other LED Connector

PCB Connector



GL-8MMPCBT-2S

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip



GL-8MMPCBX-2S

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip



GL-10MMPCBL-2

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 5050/5630/5730/
3014/7020 flexible led strip



GL-10MMPCBT-2

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 /5050/5630/5730/
3014/7020 flexible led strip



GL-10MMPCBX-2

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 /5050/5630/5730/
3014/7020 flexible led strip



GL-10MMPCBL-2B

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 5050/5630/5730/
3014/7020 flexible led strip



GL-10MMPCBT-2B

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 /5050/5630/5730/
3014/7020 flexible led strip



GL-10MMPCBX-2B

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 /5050/5630/5730/
3014/7020 flexible led strip



GL-10MMPCBL-2S

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 5050/5630/5730/
3014/7020 flexible led strip



GL-10MMPCBT-2S

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 /5050/5630/5730/
3014/7020 flexible led strip

Other LED Connector

PCB Connector




GL-10MMPCBX-2S

Available PCB size: 10mm
Pins: 2 Pin
Typically Application: 10mm
width 2835 /5050/5630/5730/
3014/7020 flexible led strip



GL-10MMPCBL-4

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 RGB flexible
led strip

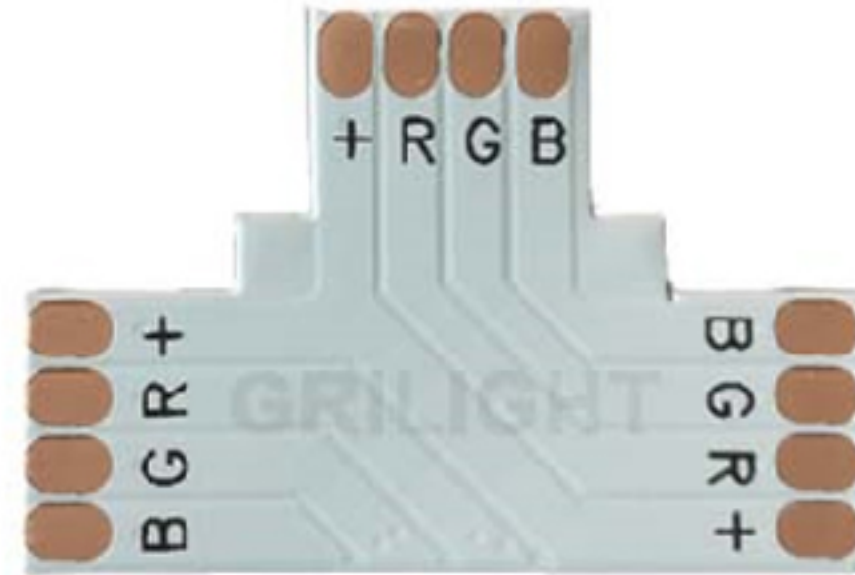

GL-10MMPCBT-4

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 RGB flexible
led strip



GL-10MMPCBX-4

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 RGB flexible
led strip



GL-10MMPCBL-4B

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 RGB flexible
led strip



GL-10MMPCBT-4B

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 RGB flexible
led strip



GL-10MMPCBX-4B

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 RGB flexible
led strip



GL-10MMPCBL-4S

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 RGB flexible
led strip



GL-10MMPCBT-4S

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 RGB flexible
led strip



GL-10MMPCBX-4S

Available PCB size: 10mm
Pins: 4 Pin
Typically Application: 10mm
width 5050 RGB flexible
led strip

Other LED Connector

PCB Connector



GL-8MMPCBL-2

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip



GL-8MMPCBT-2

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip




GL-8MMPCBX-2

Available PCB size: 8mm
Pins: 2 Pin
Typically Application:
8mm width
2835/3528/3014 /335
flexible led strip

Other LED Connector

Wire

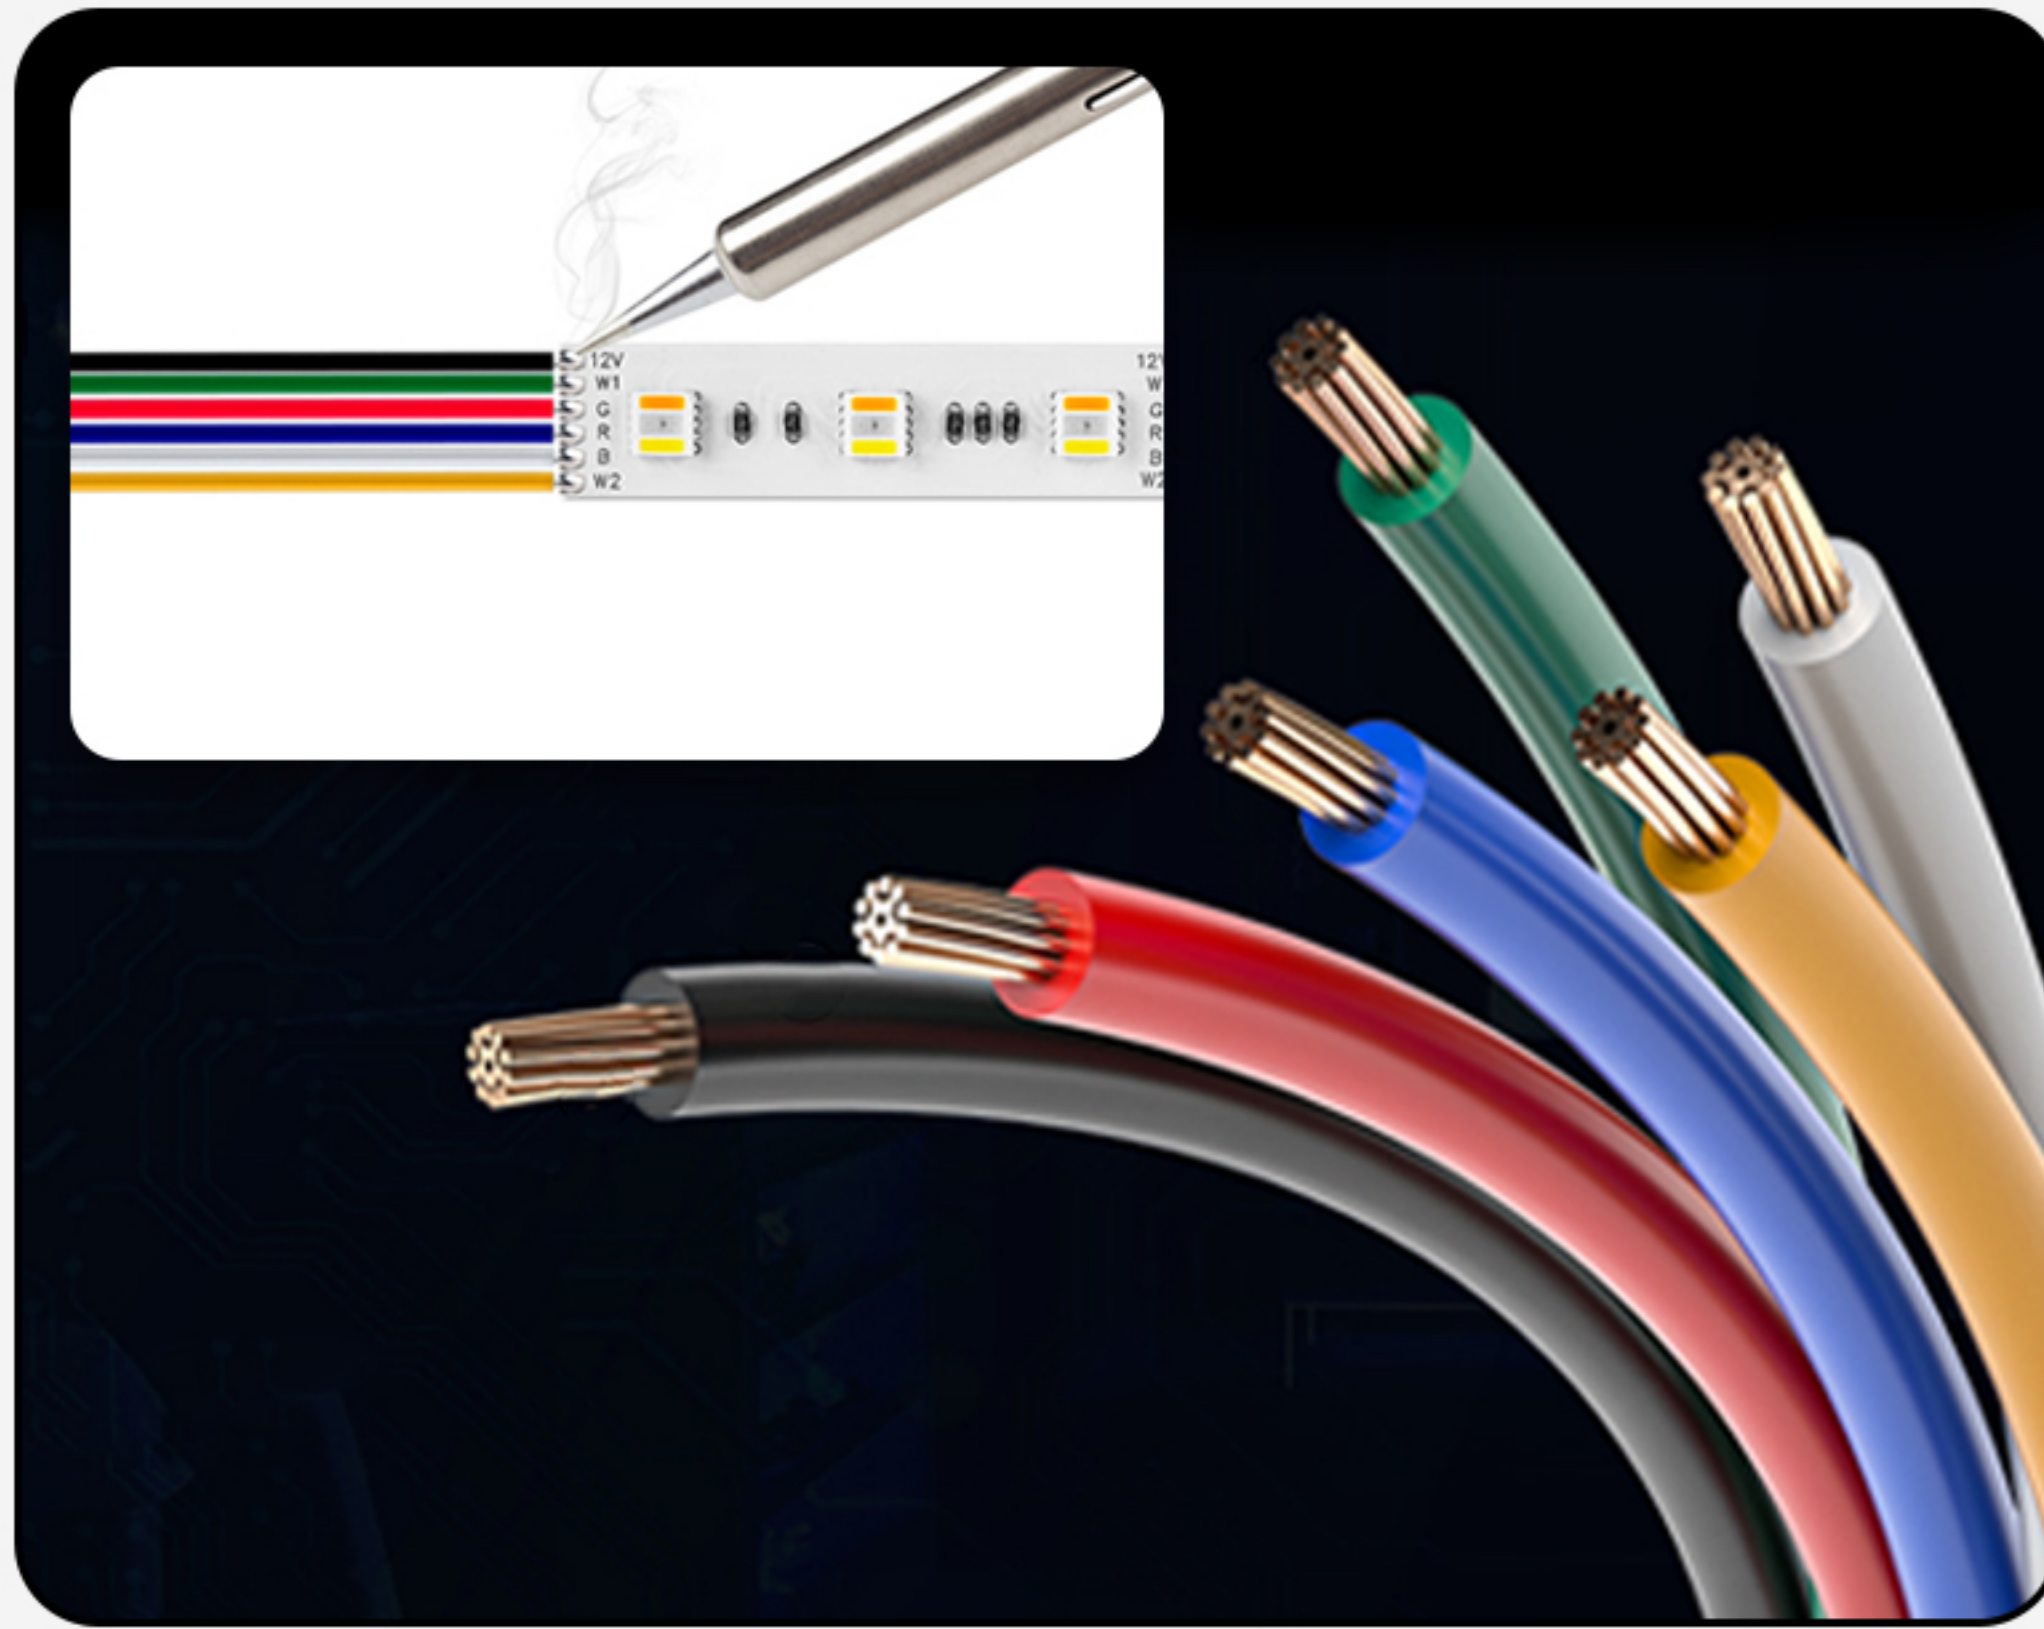

2Pin

1007 22AWG
Single core DD1.6 17/0.14TS
590M/Reel

1007 20AWG
Single core DD1.8 21/0.14TS
590M/Reel



3Pin

1007 22AWG
Single core DD1.6 17/0.14TS
590M/Reel

1007 20AWG
Single core DD1.8 21/0.14TS
590M/Reel



4Pin

1007 22AWG
Single core DD1.6 17/0.14TS
590M/Reel

1007 20AWG
Single core DD1.8 21/0.14TS
590M/Reel



5Pin

1007 22AWG
Single core DD1.6 17/0.14TS
590M/Reel

1007 20AWG
Single core DD1.8 21/0.14TS
590M/Reel



6Pin

1007 22AWG
Single core DD1.6 17/0.14TS
590M/Reel

1007 20AWG
Single core DD1.8 21/0.14TS
590M/Reel



2Pin

2464 22AWG
DD3.5 2×17/0.14TS
300M/Reel

2464 20AWG
DD4.8 2×21/0.16TS
300M/Reel

2464 18AWG
DD5.5 2×34/0.16TS
200M/Reel



3Pin

2464 22AWG
DD4.7 3×17/0.14TS
200M/Reel

2464 20AWG
DD5.1 3×21/0.16TS
200M/Reel

2464 18AWG
DD5.7 3×34/0.16TS
200M/Reel



4Pin



2464 22AWG
DD5.1 4×17/0.14TS
200M/Reel

2464 20AWG
DD5.5 4×21/0.16TS
200M/Reel

2464 18AWG
DD6.2 4×34/0.16TS
200M/Reel

Other LED Connector

Wire Connector

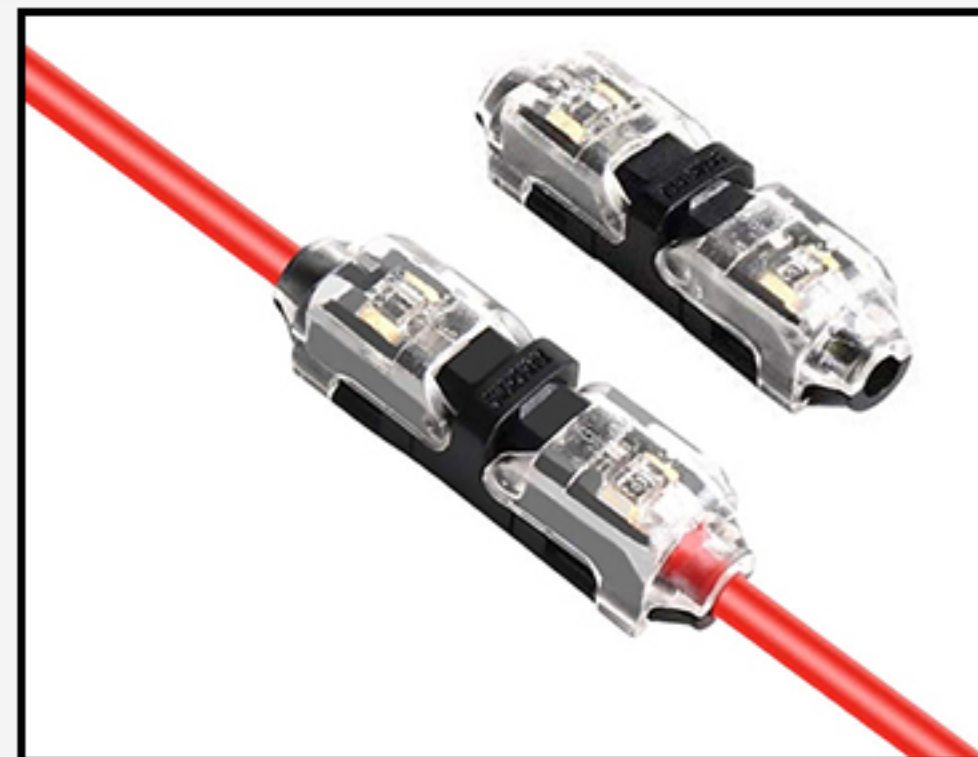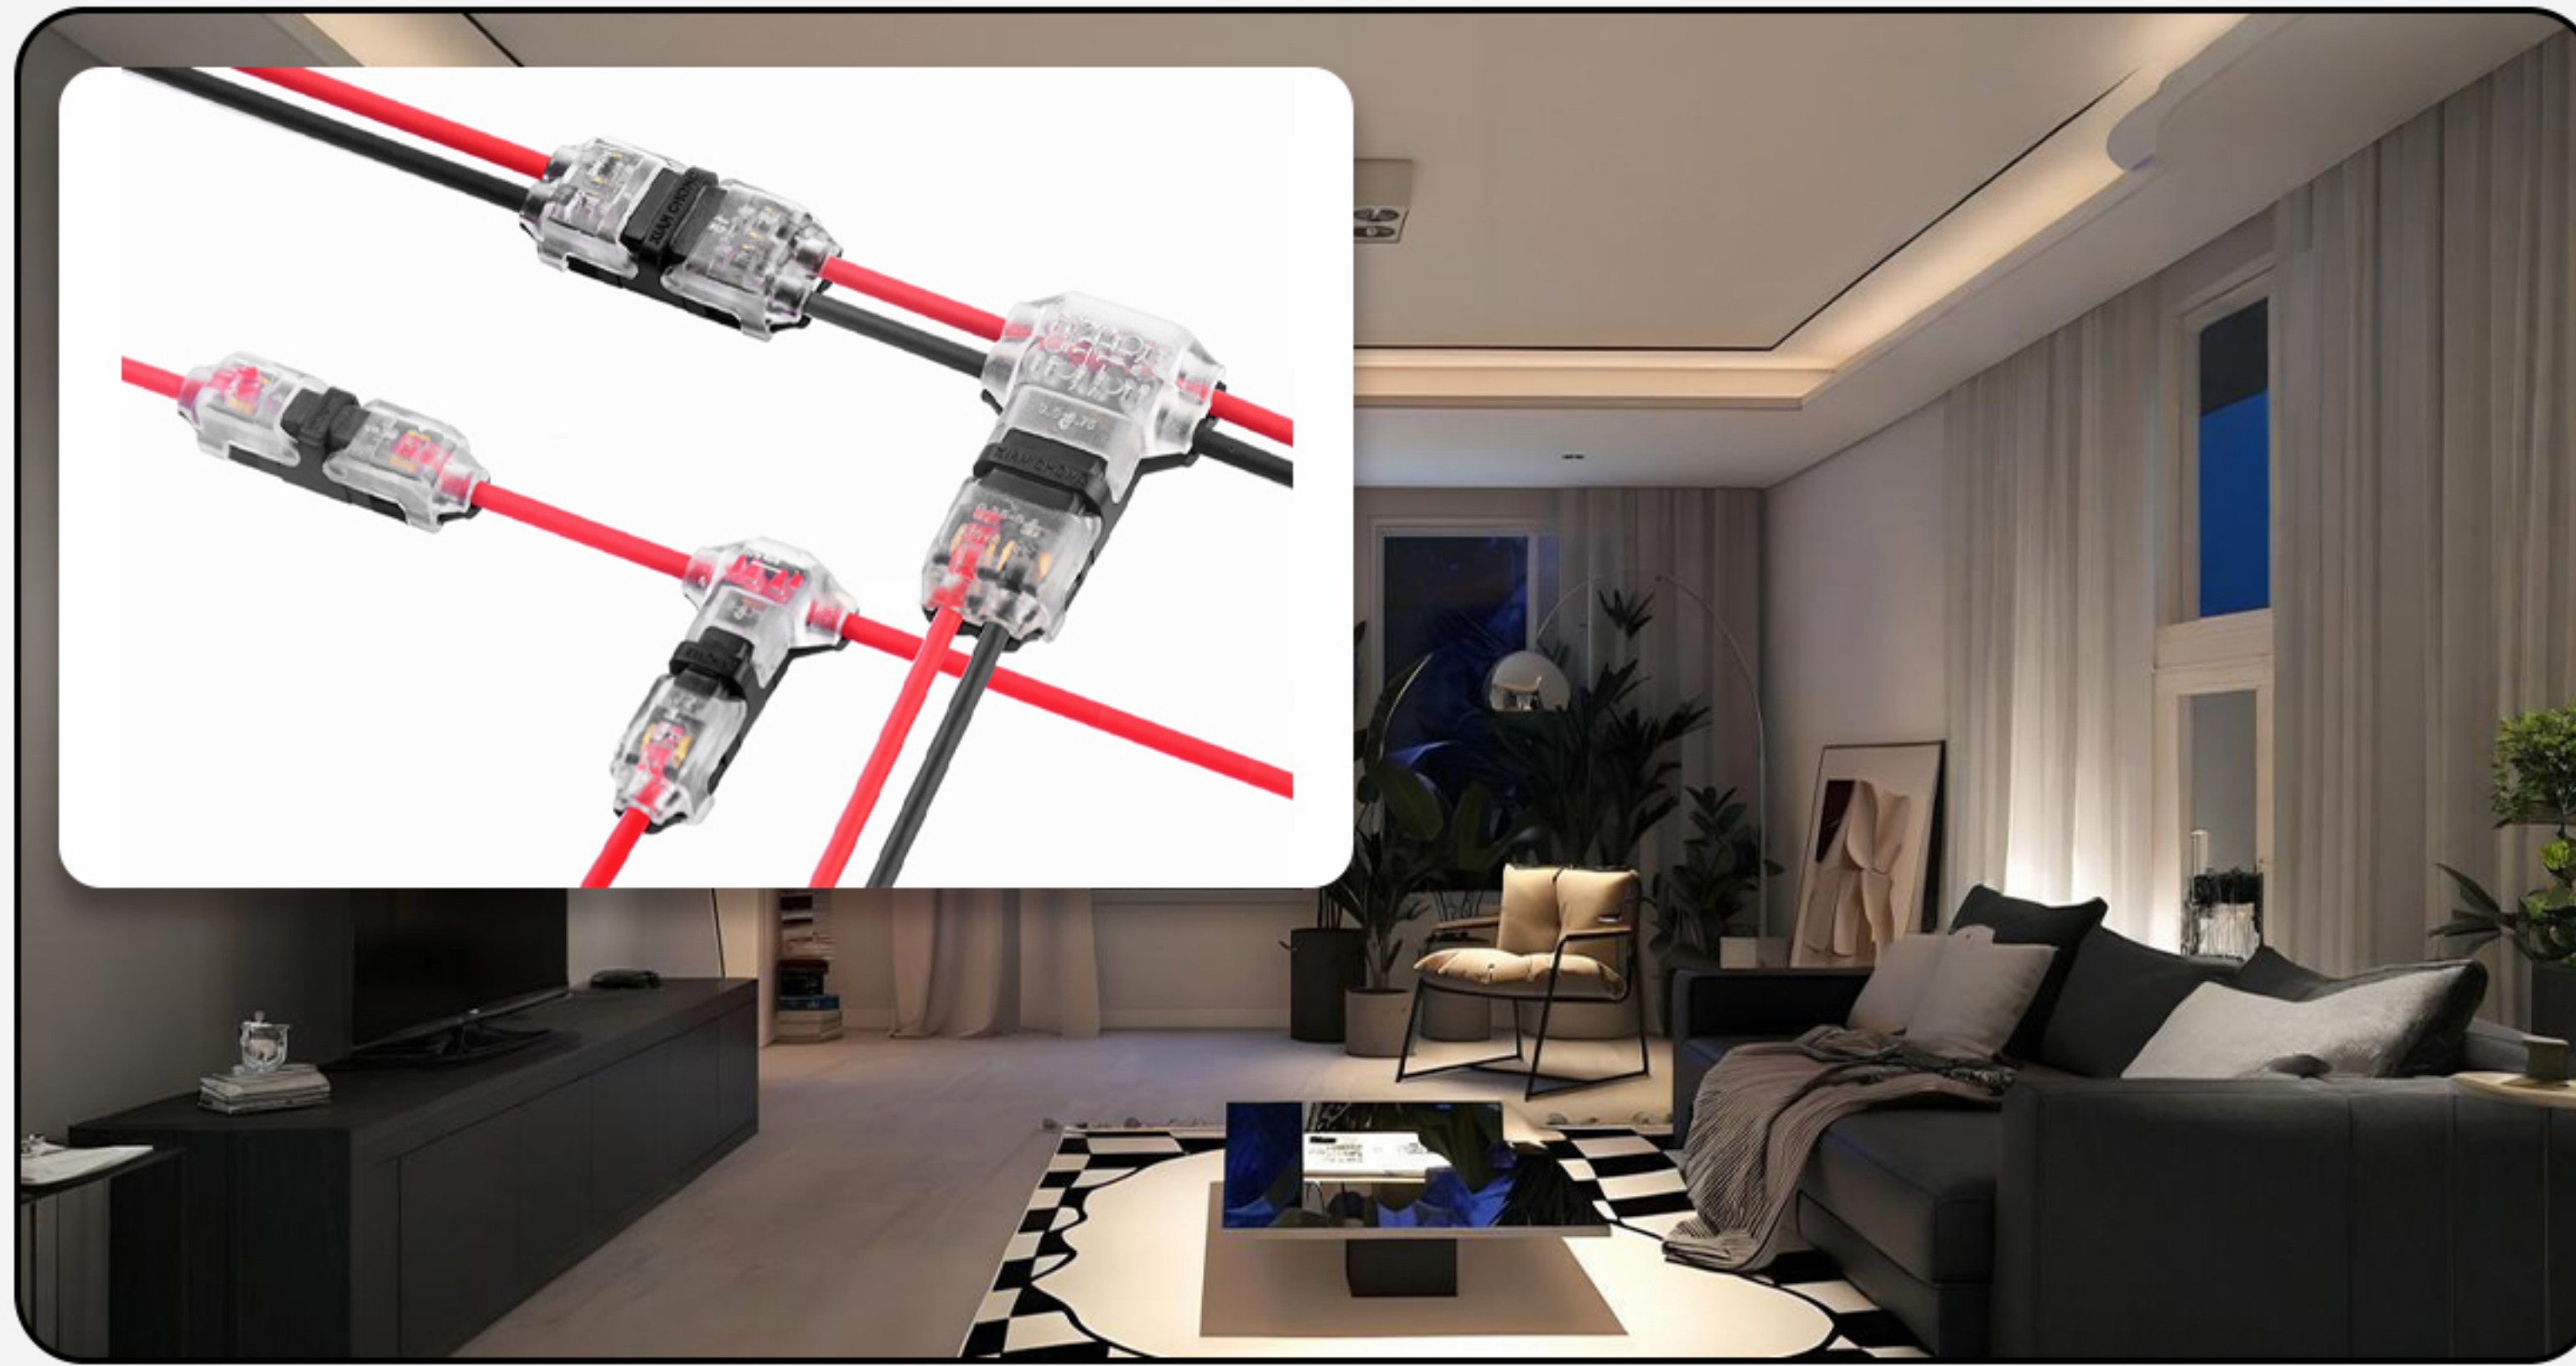


GL-XCH1

Polarity: 1
Current: 6A Max
Size: 25×7(max)×6.65mm.
Working Voltage: 300V max.
Peak Voltage: 2.5KV.
Temperature: -35 to +85°C.
Flame Class: UL94 V0
Available Cable:
0.34-0.75mm² or 18-24# AWG



GL-XCH2

Polarity: 2
Current: 6A Max
Size: 25×10.4(max)×6.65mm.
Working Voltage: 300V max.
Peak Voltage: 2.5KV.
Temperature: -35 to +85°C.
Flame Class: UL94 V0
Available Cable:
0.34-0.75mm² or 18-24# AWG

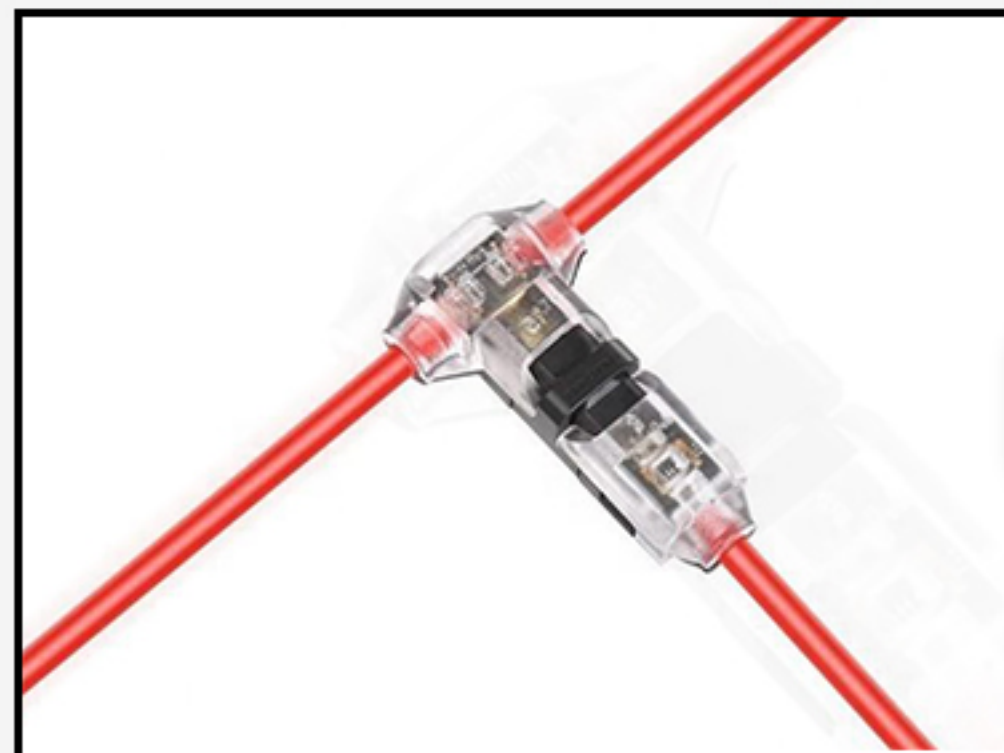

GL-XCT1

Polarity: 1
Current: 6A Max
Size: 25×12.8(max)×6.65mm.
Working Voltage: 300V max.
Peak Voltage: 2.5KV.
Temperature: -35 to +85°C.
Flame Class: UL94 V0
Available Cable:
0.34-0.75mm² or 18-24# AWG



GL-XCT2

Polarity: 2
Current: 6A Max
Size: 28.6×16.6(max)×6.65mm.
Working Voltage: 300V max.
Peak Voltage: 2.5KV.
Temperature: -35 to +85°C.
Flame Class: UL94 V0
Available Cable:
0.34-0.75mm² or 18-24# AWG



GL-XCH2A

Polarity: 2
Current: 6A Max
Size: 34.4×9.5(max)×6mm.
Working Voltage: 300V max.
Peak Voltage: 2.5KV.
Temperature: -35 to +85°C.
Flame Class: UL94 V0
Available Cable:
0.34-0.75mm² or 18-24# AWG



GL-XCY1T2

Polarity: 1 to 2
Current: 6A Max
Working Voltage: 300V max.
Peak Voltage: 2.5KV.
Temperature: -35 to +85°C.
Flame Class: UL94 V0
Available Cable:
0.34-0.75mm² or 18-24# AWG

GRILITELUX



Shenzhen Grilight Technology Co.,Ltd

Tel:+8675527390189

Fax:+8675527397337

Web: www.grilite.com

Contact: sale@grilight.com